

Destroyer series


### JL JEEP

SPARE TIRE LICENCE
PLATE RELOCATION KIT


INSTALLATION INSTRUCTIONS




#### **INSTALLATION ON JEEP JL OEM TIRE CARRIER**




Use a T-25 Torx bit to remove the screws that secure the plastic cover on the tail light hoop.




Unplug the light, then remove the cable and light from hoop.



Relocate the 3rd Brake Light to the Spare Tire License Plate Frame using the original screws.



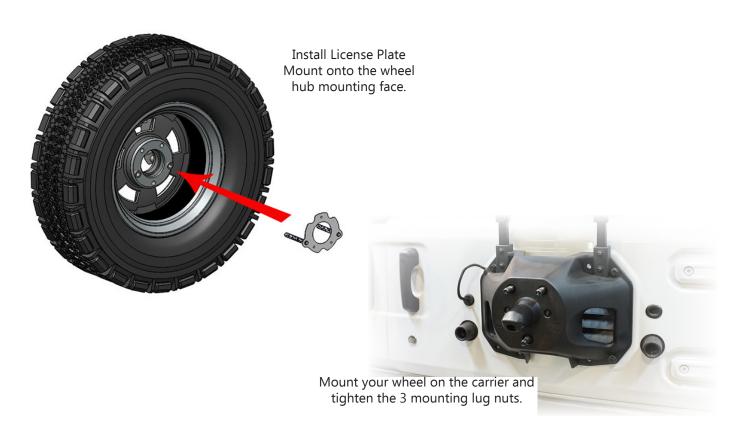




Install the Spacer Tubes and the Spare Tire License Plate Frame using 1/2" Hex Nuts and Washers.


Depending on the style of your wheel, you may need to trim the plastic tube spacers to a shorter length.

\*\*Dont Forget to re-route the 3rd Brake Light cable thru the wheel and plug it in!\*\*


## Recommended Installation for wiring license plate bolt lights \*sold seperately\*.

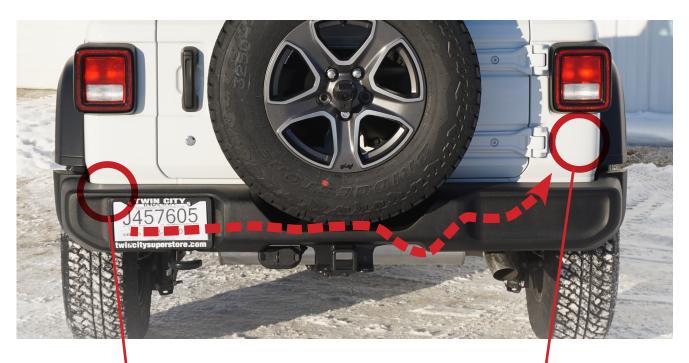


Location of rear bumper wire harness plug.
Locate license plate light wires and tap into them to extend wiring across the inside of the bumper as shown. You may use the provided wire and butt connectors to make this extension.

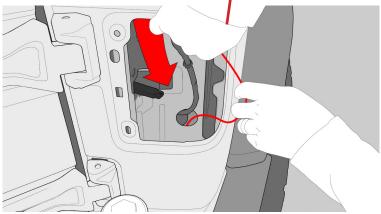

Feed the extension wire from the bumper up through the hole indicated behind the rear tail light on the passenger side.

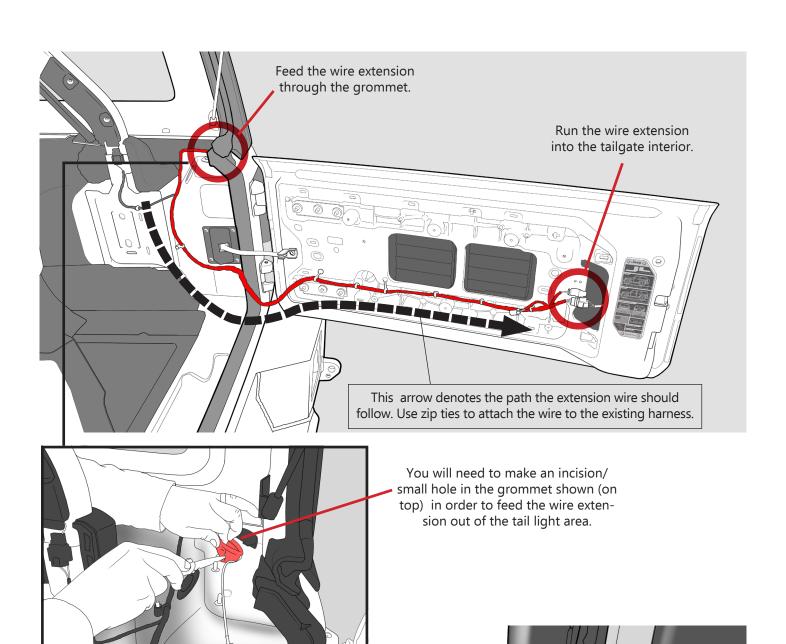

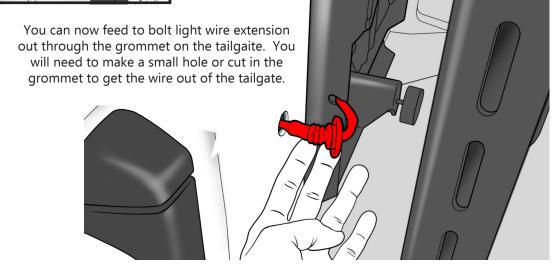


Feed the wire extension through the wheel. Be sure to leave some slack in the wire so you can remove the license plate assembly easily if you need too. You may use the barrel connectors provided with the bolt light kit to complete the installation.




**Completed Installation!** 


#### INSTALLATION ON JEEP JL DESTROYER TIRE CARRIER

Follow the instructions above for assembling the 3rd Brake Light and the Spare Tire License Plate Frame and install onto your spare tire. Install your spare tire as you normally would onto the Destroyer Tire Carrier and complete the assembly.

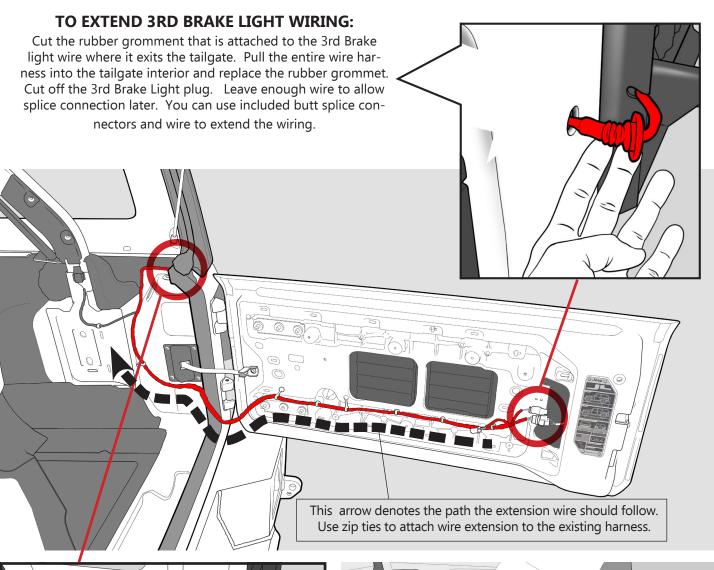



You will need to make an incision/small hole in the grommet shown (on top) in order to feed the wire extension through the tail light area.

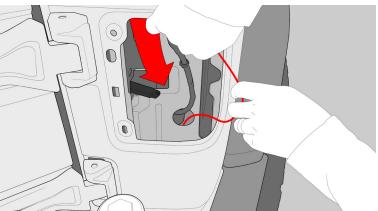


Feed the extension wire down through the hole indicated, you should see the wire come out under the Jeep. You can use a flashlight to help find it.

## Recommended Installation for wiring license plate bolt lights \*sold seperately\*.




Location of rear bumper wire harness plug. Locate license plate light wires and tap into them to extend wiring across the inside of the bumper as shown. You can use the provided wire and butt connectors to make this extension.

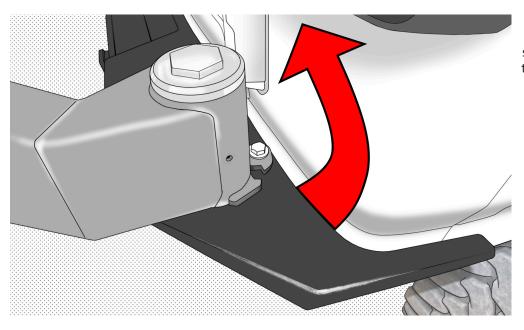

Both 3rd Brake Light and License Plate Light wire extensions should come up between the Jeep and the bumper, close to the base of the swing arm. You can use zip ties to secure the wire extentions under the Jeep and inside the bumper.


\*\*You can run both wire extensions through the provided cable sheathing to help protect against abrasion.\*\*

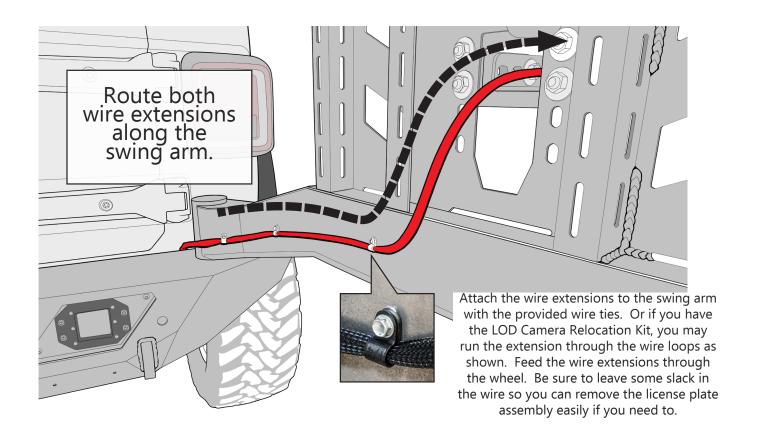

Reconnect the 3rd Brake Light connector to your wire extension using the supplied butt splice connectors and connect your Bolt Lights.



**Completed Installation!** 

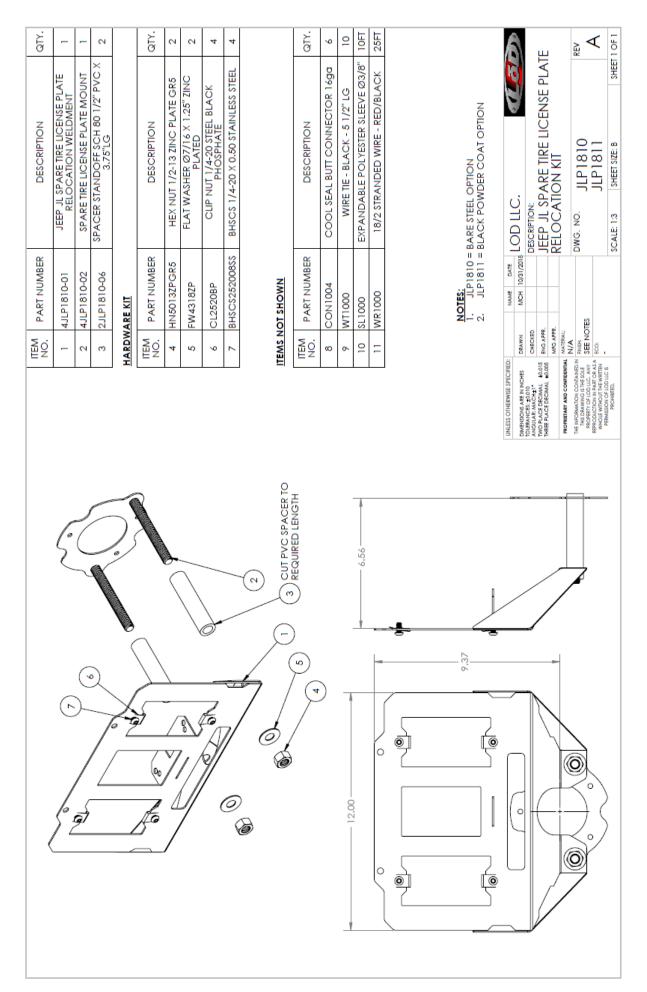





# JL JEEP SPARE TIRE LICENCE PLATE RELOCATION KIT


SHIPPING SHEET Packaged by:


On:












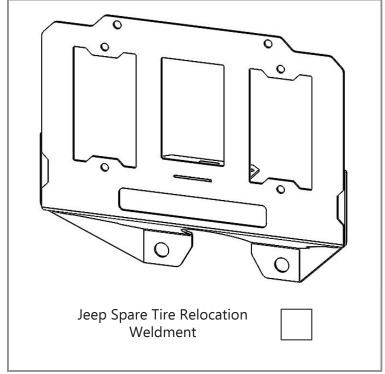



## SPARE TIRE LICENCE PLATE RELOCATION KIT

HARDWARE KIT Packaged by:

On:

