



www.HylineOffroad.com

1507C West Park Avenue • Perkasio, PA 18944
Tel: 215/257-4323 • Fax: 215/257-4364 • 888-HYLINE 1 (888/495-4631)

Proudly Made In USA

Installation Instructions:

TJ/YJ Standard Front Bumper
Part Number: **TJ-YJ-10SFB**

Vehicle Fitment:


1987 – 2006 Jeep Wrangler and
Wrangler Unlimited

Parts List


Qty:

- 1 Standard Front Bumper**
- 1 Winch Plate**
- 2 TJ Left & Right Bumper Mounting Brackets**
- 2 YJ Left & Right Bumper Mounting Brackets**
- 10 ½" Grade 8 Bolts**
- 10 Lock Washers**
- 10 Flat Washers**

Tools Needed



**Ratchet
3/8" Socket
¼" Socket
T-55 Torx Socket
Torque Wrench**



Tape Measure



Safety Glasses

Congratulations on your purchase of the Hyline Offroad Standard Front Bumper. Our Bumpers are completely manufactured in our facility located in Perkasio, PA. They are designed and engineered by Offroad enthusiasts just like you to be rock solid at an affordable price. Hyline Offroad would like to thank you for your recent purchase and look forward to serving you in the future.

Hyline Offroad Staff

PLEASE READ INSTRUCTIONS BEFORE BEGINNING INSTALLATION

*****IMPORTANT*****

Unlike many other designs, Our original design allows you to install your winch AFTER installing the bumper. So if you wanted to add a winch down the road our design allows you to do so without removing your bumper. To install your winch after mounting the bumper follow the instructions starting on Page 4.

Front Bumper Installation

Step 1 - Remove Stock bumper by unbolting the six (6) T-55 Torx Bolts. Two on the top of each side of the bumper and one on the bottom of each side. Say goodbye to your flimsy stock bumper!

Step 2 - Remove plastic factory sway bar cover by unbolting four (4) 3/8" bolts from each side of cover. Do not Throw Away.

Step 3 - Using tape measure, find the center point in between frame rails by Measuring the total width from inside frame rails. Mark the center Point. (See Figure 1)

IF APPLICABLE

Disconnect all External Lighting Wiring that is presently attached to existing bumper.



Figure 1

Step 4 - Install proper Bumper Mounting Brackets (See Figure 2) using four (4) Supplied ½" Bolts, Lock Washers and Flat Washers. Brackets are Located with the vertical flanges toward outside of frame rails. DO NOT TIGHTEN BOLTS YET

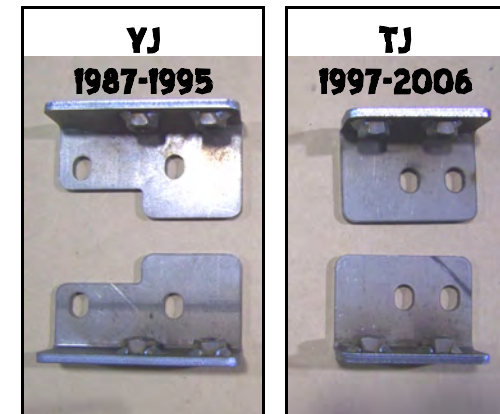


Figure 2

Step 5 - Measure from center point (measured in Step 3) to outside of the Vertical flange on bracket. Locate bracket at 16 7/8" from center point. Repeat to opposite side bracket. (See Figure 3) This step will ensure The bumper slides over the brackets easily. Once brackets are in proper position Torque all four (4) bolts to 119 ft./lbs.

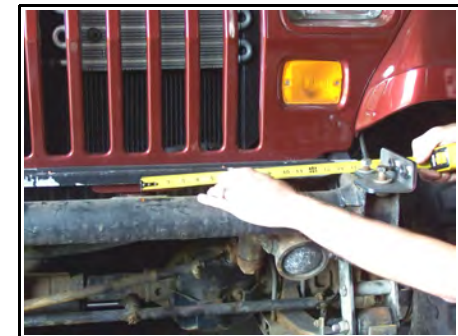


Figure 3



You may at this point install winch with bumper off vehicle OR you can wait until after bumper is mounted on the vehicle. Our unique design gives you this option which makes the bumper installation easier so you're not lifting so much weight.

Step 6 - Slide front bumper over brackets. Install Four ½" Bolts, Lock Washers, And Flat Washers through 5/8" Shackle Plates and thread into weld nuts on Mounting Brackets. You may need to rock bumper back and forth slightly to start the bolts in the weld nuts. DO NOT TIGHTEN BOLTS YET. (See Figure 4)

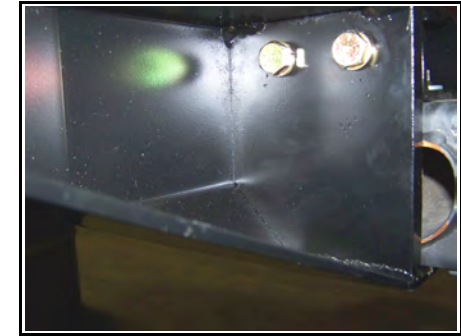


Figure 4

Step 7 - Install the two remaining ½" Bolts, Lock Washers, and Flat Washer on bottom of the bumper.

Step 8 - Tighten all ½" Bolts to 119 ft./lbs.

Step 9 - If re-installing Plastic Factory Sway Bar Cover you will need to notch out areas where winch feet are positioned.

Optional Winch Installation

Step 1 - Bolt on Fairlead supplied with winch, to the Winch Plate supplied with Bumper. Tighten Bolts

Step 2 - Mount Winch and Winch Plate onto Bumper using supplied hardware with winch. Install the two bolts. closest to the grille first. You may have to tip the winch forward slightly to get bolts started in the winch feet holes. Do Not Tighten Bolts Yet.

Step 3 - Using a Ratchet Extention (Approx 12") with correct short socket for winch bolt, thread the 2 front bolts into winch feet through the clearance holes in the bumper.

Step 4 - Tighten all Winch Bolts to manufacturers torque specifications.

Now you're ready for the ROCKS!!

Send your installed HYLINE OFFROAD product pictures to pics@HylineOffroad.com . If we choose any one of your pictures to be used on our website, We send you a FREE Hyline Offroad T-Shirt.



Attention

Installation instructions provided must be read and followed exactly when installing product. Failure to do so could potentially result in injury or death of any occupants in the vehicle. **WEAR SEAT BELTS AT ALL TIMES WHEN DRIVING!**

Though our products are more rugged than standard factory products, they are primarily designed and built to enhance the appearance of the vehicle and will not protect from death or injury in the event of an accident. Adhere to all vehicle manufacturers specifications.

LIMITED WARRANTY

Hyline Offroad, LLC, having its principal place of business at 1507C West Park Ave. Perkasio, PA. 18944 ("Manufacturer") warrants its Front Bumper products (the "Products") as follows:

1. Limited Warranty.

Manufacturer warrants that the Products sold hereunder will be free from defects in material and workmanship for a period of one(1) year from the date of purchase. If the Products do not conform to this Limited Warranty during the warranty period (as herein above specified), Buyer shall notify Manufacturer in writing of the claimed defects and demonstrate to Manufacturer satisfaction that said defects are covered by this Limited Warranty. If the defects are properly reported to Manufacturer within the warranty period, and the defects are of such type and nature as to be covered by this warranty, Manufacturer shall, at its own expense, furnish, replacement Products or, at Manufacturer's option, replacement parts for the defective Products. Shipping and installation of the replacement Products or replacement parts shall be at Buyer's expense.

2. Other Limits.

THE FOREGOING IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Manufacturer does not warrant against damages or defects arising out of improper or abnormal use of handling of the Products; against defects or damages arising from improper installation (where installation is by persons other than Manufacturer), against defects in products or components not manufactured by Manufacturer, or against damages resulting from such non-Manufacturer made products or components. Manufacturer passes on to Buyer the warranty it received (if any) from the maker thereof of such non-Manufacturer made products or components. This warranty also does not apply to Products upon which repairs have been effected or attempted by persons other than pursuant to written authorization by Manufacturer.

3. Exclusive Obligation.

THIS WARRANTY IS EXCLUSIVE. The sole and exclusive obligation of Manufacturer shall be to repair or replace the defective Products in the manner and for the period provided above. Manufacturer shall not have any other obligation with respect to the Products or any part thereof, whether based on contract, tort, strict liability or otherwise. Under no circumstances, whether based on this Limited Warranty or otherwise, shall Manufacturer be liable for incidental, special, or consequential damages.

4. Other Statements.

Manufacturer's employees or representatives' ORAL OR OTHER WRITTEN STATEMENTS DO NOT CONSTITUTE WARRANTIES, shall not be relied upon by Buyer, and are not a part of the contract for sale or this limited warranty.

5. Entire Obligation.

This Limited Warranty states the entire obligation of Manufacturer with respect to the Products. If any part of this Limited Warranty is determined to be void or illegal, the remainder shall remain in full force and effect.