

## 07-09 Jeep JK Grille Installation Instructions


Parts list: 1 grille, 2 - 15" brackets, 4 – 8/32 x 5/8" screws, 4 – 8/32 nylon lock nuts.

Step 1 – Remove front shell. Open the hood, remove rubber clips on top of shell, pull shell out enough to insert a flat screw driver, remove bottom clips, and signal lights.

Step 2 – Align Grille to Shell. Put the shell face down on a protected surface, place the grille face down on shell, align the raised sections of grille with the 7 shell openings (IMPORTANT – Make sure that the notch cutout is facing the bottom of the shell).



Step 3 – Attach brackets. Align the brackets as seen in picture above, apply pressure to bottom of bracket and drill a 3/16" hole (see figure 1), attach screw and lock nut – do not over tighten. Repeat steps for second bracket at figure 2. Apply pressure to top of bracket – figure 3 (enough to firmly seat the grill into shell), drill 3/16" hole, insert screw with lock nut on top of shell. Repeat for figure 4. Be sure to tighten all lock nuts.

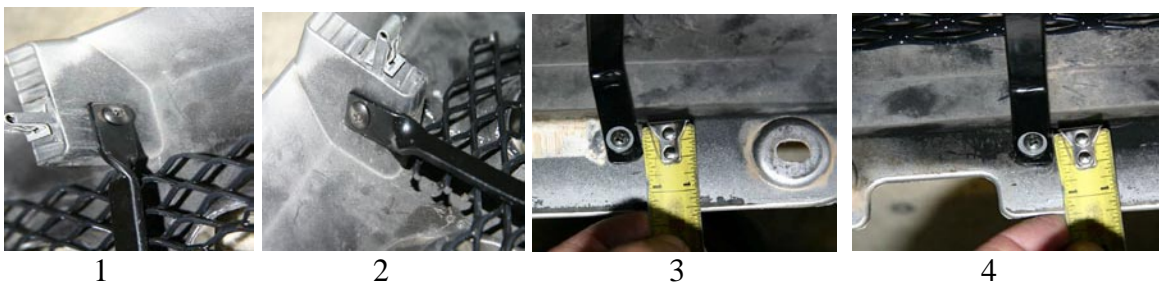

Step 4 – Reinstall shell with grille attached. Reattach signal lights, align grille shell with holes and reinsert the rubber clips.

We hope you enjoy your new grille!!