
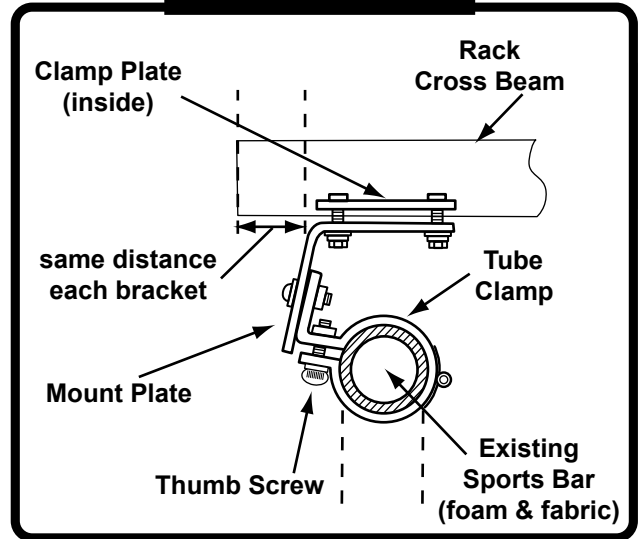


### DIAGRAM #1a

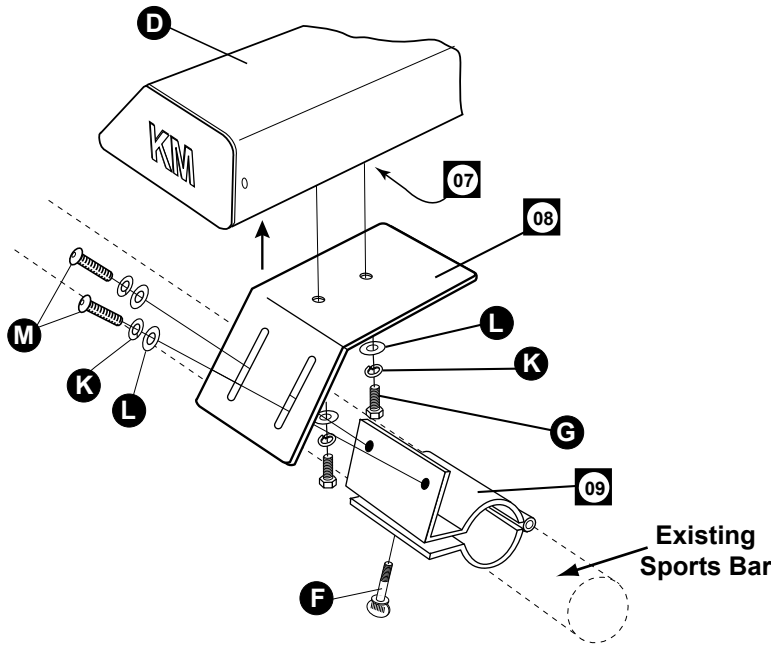

**DO NOT REMOVE** foam & fabric from sport bar. These clamps are designed to fit over the fabric.  
**NOTE:** This model will work with bikini tops and side windows.

- # 1 = Align mount plate holes with clamp plate holes (inside cross beams **D** ) and attach mount plates **08** with bolts **G**, lock washers **K**, and flat washers **L**, finger tight so mount can easily slide on cross beams.
- #2 = Next attach tube clamps **09** snug to plate **08** using cap screws **M**, lock washers **K**, and flat washers **L**.
- #3 = Now place rack on sports bar by resting open tube clamps **09** on top of sports bar in desired location front to rear.
- # 4 = Next hinge up the lower section of tube clamp and insert thumb screws **F**. Lightly tighten all four clamps. Now move each mount plate **08** up or down to position rack level. Tighten cap screws **M** to secure.
- # 5 = Center rack side to side with equal distance from all end caps to mounting plates and tighten bolts **G**. Double check alignments at this time and also check for bikini top strap clearance (if you intend to use one). Now snug down thumb screws **F** by hand only. Too tight can cause tearing of sport bar fabric.

THAT'S IT! Your Installation Is complete.

**NOTE:** When removing your rack, remove only the thumb screws **F**, while the other bolts should remain tight so reinstalling requires no readjustments at all. The reinstall should only take a couple of minutes.

### HARDWARE KIT FOR JEEP® WRANGLER SPORT BAR MOUNT

