QuadraTop® Bimini Top and Bimini Top Plus

Installation Manual for '07-'Current Jeep JK Wrangler Vehicles #11022.0435. #11022.1435 and 11022.1335



PARTS LIST: FABRIC BIMINI or BIMINI PLUS TOP - QTY 1

FOR BIMINI TOP: 2 DOOR SHORT TENSION STRAPS - QTY 2 LONG TENSION STRAPS - QTY 2

FOR BIMINI TOP PLUS: 2 DOOR REAR TENSION STRAPS - QTY 2 SIDE TENSION STRAPS - QTY 2

FOR BIMINI TOP PLUS: 4 DOOR

SIDE TENSION STRAPS - QTY 2 WEB STRAP WITH GROMMET - QTY 2 M6 x 20MM BOLT - QTY 2


REQUIRED TOOLS:

SAFETY GLASSES FOR 4 DOOR BIMINI PLUS ONLY: 10MM SOCKET & RATCHET UTILITY KNIFE



Important Safety Information:

Your QuadraTop[®] Bimini Top/Bimini Top Plus is intended to increase the fair weather enjoyment of your off-road capable vehicle. Before installation, please take a moment to review the following safety information and installation instructions. Important safety information is generally preceded by one of three signal words indicating the relative risk of injury. The signal words mean:

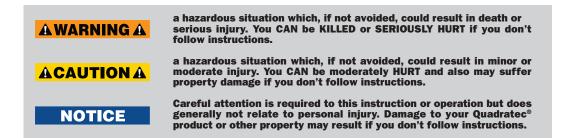

Before You Begin Installation:

Congratulations on your purchase of the QuadraTop Bimini or Bimini Plus Top! This high quality brief top is designed to enhance fair weather driving pleasure while providing shade and minimal shelter from light rain. We have used only the finest materials in creating this top but like any product that is exposed to the elements, there is some general maintenance that is required to keep it looking like new. Please see page 9 for these important maintenance tips. Thank you again for your purchase and let's start the installation process!

When unpacking, check to make sure all parts are included. If any part is missing or broken, please call Quadratec Customer Service at 800-745-6037 as soon as possible.

Important: Make sure you become familiar with the installation process of this top by reading the following instruction sheet thoroughly.



Important: For a smooth fit and ease of installation, this top should be installed at temperatures above 72 degrees. Below this temperature, the fabric may contract an inch or more making it difficult to install. We highly recommend taking the top out of the package and letting it sit inside a warm place or direct sun light for 1-2 hours before you install the top. When warm, this top will install quickly.

It is normal for fabric to contract and wrinkle when stored in the shipping carton. In a few days the fabric will relax and wrinkles will disappear.



The Trusted Source

Before Installation: All Models




Windshield Channel Requirements

All Bimini tops are designed to fit into a required windshield channel. You may already have the correct one. Compare yours to photo above. If it is not the same, get #11122.102 at quadratec.com **Threading Straps Through Buckles:** Throughout the installation, you will need to thread the straps through the buckles several times. Please review the diagram above for correct strap routing through the buckles.


Threading straps

through buckles

NOTICE Remove your factory hard or soft top including your factory front header assembly. Make sure Bimini Top/Plus is centered on vehicle.



Step One: for ALL '07- Current JK SNAP BIMINI TO THE HEADER With the windshield header removed from vehicle, slide the pocket sewn along the front of the Bimini Top/Bimini Top Plus over the edge of the header and snap it to the eight snaps on both sides, as shown.




Step Two A: for ALL '07- Current JK DRAPE BIMINI OVER VEHICLE Drape the Bimini over the vehicle, and center it on the vehicle. Please see next page for continuation of step two.




The Trusted Source

Step Two B: for ALL '07- Current JK



SECURE HEADER TO WINDSHIELD With the Bimini Centered on the vehicle, place the tabs on the Header Knob Bases above the footman loops in the windshield frame. Place a Header Knob

Step Three: for Bimini JK 2 Door only



INSTALL SHORT TENSION STRAPS Drape the Bimini over the speaker pod. Thread a short tension strap through the



two buckles sewn to the rear of the Bimini. Pull the straps under the pod and hook each strap into the opening as shown. Pull the end of each strap to tighten securely.





Plate under a footman loop. Install a Header Knob through the plate and footman loop and then thread it into the Header Knob Base. Repeat this process on the opposite side of the vehicle.

Step Four: *for Bimini JK 2 Door only*



SECURE SIDE FLAPS Wrap the flap above the door opening around the horizontal sport bar and then fasten the hook and loop closure. Repeat on both sides of the vehicle.




Reminder of method to thread straps through buckles.

Quadratec)

The Trusted Source

Step Five: for Bimini JK 2 Door only




INSTALL LONG TENSION STRAP Thread a long tension strap thorough the buckle on the side of the Bimini.

Pull the strap under the sound pod and hook it into the same hole as the other rear buckle strap.



Step Six: for Bimini JK 2 Door only



SECURE REAR CORNER STRAPS Locate the buckle straps sewn to the rear corner of the Bimini. Wrap the strap under the Bimini and around the sport bars. Thread the end of the strap through the buckle and pull it tight. Repeat on opposite side of vehicle.

Install complete for Bimini 2 door JK!






NOTICE

THIS SECTION OF INSTALLATION INSTRUCTIONS IS FOR BIMINI PLUS FOR 2 DOOR JK VEHICLES

Step Three: Bimini Plus for 2 door JK




SECURE SIDE FLAPS Wrap the flap above the door opening around the horizontal sport bar and then fasten the hook and loop closure. Repeat on both sides of the vehicle.


Step Five: Bimini Plus for 2 door JK

INSTALL REAR TENSION STRAPS Thread a Tension strap through the buckle on the rear of the Bimini Plus. Clip the end of the strap to the hole in the sport bar. Pull the strap tight. Repeat on opposite side of the vehicle.


Step Four: Bimini Plus for 2 door JK

INSTALL SIDE TENSION STRAPS Thread Side Tension straps through the buckle on side of the Bimini Plus. Hook end of the strap under the belt rail and slide it under the door surround. Pull the strap tight. Repeat on opposite side.





Install complete for Bimini Plus for 2 door JK!






The Trusted Source


NOTICE

THIS SECTION OF INSTALLATION INSTRUCTIONS IS FOR BIMINI PLUS FOR 4 DOOR JK VEHICLES

Step Three: Bimini Plus for 4 door JK



SECURE B-PILLAR STRAPS Wrap the strap around the B-Pillar between the front and rear door.




Thread the strap through the buckle and pull it tight. Repeat this on opposite side of vehicle.

Step Five: Bimini Plus for 4 door JK

Tension Strap Hook to Belt Rail

INSTALL SIDE TENSION STRAPS Thread Side Tension strap through the buckle on the side of the Bimini Plus. Hook the end of the strap under the belt rail and slide it under the door surround. Pull the strap tight. Repeat on opposite side of vehicle.

Step Four: Bimini Plus for 4 door JK



SECURE SIDE FLAPS


Wrap the flap above the door opening around the horizontal sport bar and then fasten the hook and loop closure. Repeat on opposite side of the vehicle.



Reminder of method to thread straps through buckles.

Step Six A: Bimini Plus for 4 door JK


PARTS NEEDED FOR STEP SIX: For working on Sport Bar at rear of vehicle:






The Trusted Source

Step Six B: Bimini Plus for 4 door JK




FOR VEHICLES WITHOUT SOFTTOP PIVOT BRACKET: PREPARE TO INSTALL WEB STRAP W/GROMMET Feel through the Sport Bar Cover and locate the bottom hole in the sport bar.



Use a Utility knife to cut a hole in the sport bar cover over the location of the hole. Repeat on opposite side of vehicle.


Step Seven: Bimini Plus for 4 door JK




FOR VEHICLES WITH FACTORY SOFTTOP PIVOT BRACKET: PREPARE TO INSTALL WEB STRAP WITH GROMMET

Open the sport bar cover and locate the bottom pivot bracket bolt. Use a utility knife to cut a hole in the sport bar cover over the location of the bolt hole. Repeat on opposite side of the vehicle.

These holes in the sport bar cover will be for the hardware for the web strap to be installed in Step Seven, shown below.



INSTALL WEB STRAP W/GROMMET Place the grommet in the web strap over the hole in the sport bar cover and secure the M6x20 Bolt. Repeat on opposite side of vehicle. For vehicles with Factory




Soft Top Pivot Brackets, you may either use the M6 x 20mm bolt or re-install the factory bolt removed from the bracket in the previous step. The bolt goes through new hole in the sport bar cover.




The Trusted Source

Step Eight: Bimini Plus for 4 door JK



THREAD THE WEB STRAP THROUGH THE REAR BUCKLE Thread the Web Strap through the buckle sewn to the Bimini and pull it



tight. Finally, repeat on the opposite side of the vehicle. Install complete for Bimini Plus for 4 door JK vehicle. Congratulations!

ACAUTION A MAKE SURE THE REAR TENSION STRAP DOES NOT INTERFERE WITH REAR SEAT BELT OPERATION.

Care and Maintenance:

Your OuadraTop Bimini Top is made of the finest materials available but to keep it looking new and for the maximum possible wear, it will need periodic cleaning and basic maintenance. The main threat to your soft top are pollutants, dirt and grime. By keeping your soft top clean you will prolong the life of your top. We recommend the following to keep your top like new:

Washing: The soft top fabric should be washed often using a mild soap, warm water and a soft bristle brush. You can also use special soft top cleaners available on our website at **quadratec.com** Make sure that after cleaning you rinse with clear water to remove all traces of soap to avoid residue. Water/Fabric: In the event of seeping through the seams, 3M Scotchgard[®] may be applied on the inside of the seams to stop the see. Rips in the fabric may be repaired with Bondex[®] iron on patches. Iron the patches to the Inside of the top, carefully following the Bondex[®] instructions.

Snaps: Not all models have snaps. If present, keep snaps cleaned and lubricated with silicone to help prevent snaps from sticking to the studs. If a snap does become stuck to a stud, use a screwdriver and GENTLY pry apart to prevent permanent damage to the snap or the top fabric.





Key QuadraTop Features

1. Fabric: Tough 23 ounce mildew and UV resistant vinyl coated polyester and cotton fabric provides lasting durability and is backed by a limited three year warranty. QuadraTops are available in factory original colors and textures to keep your Jeep[®] looking showroom new!

2. Stitching: Our QuadraTop panels are sewn together with marine grade 135 gauge bonded Anefil® polyester thread that's super strong and UV protected. This rot resistant thread will provide years of worry free durability.

3. Seams: All exposed QuadraTop seams feature heat tape seals over double stitching to keep moisture out.

4. Windows: QuadraTops are available with your choice of zip out crystal clear windows or rear and quarter windows with a dark 31% tint keeping interiors much cooler in hot summer months. Our glass panels are 30mil thick and DOT approved for the ultimate in clarity and durability and feature leak proof heat seals. All windows are completely removable for open air enjoyment.



5. Zippers: QuadraTop window zippers are stitched in place like the original tops and feature jam resistant technology and heavy duty plastic teeth. Side quarter windows feature single metal pulls while rear glass zippers have user friendly double pulls.

6. Hook & Loop

Attachment: Our patterns are fully tested to ensure a tight and wrinkle free fit like the originals. All necessary snaps and Heavy Duty Hook & Loop strips are in place to install over the factory bows and there's never any drilling or modifications required!

7. Belt Rail System: Each QuadraTop utilizes the original belt rail attachment methods for a fit that's as tight as a drum!

Shop today! @ quadratec.com



The Trusted Source

QuadraTop® Replacement Soft Tops

Affordable quality and durability with no compromises! Our top kits are designed to work with factory hardware and feature finer quality materials and workmanship along with the latest in manufacturing technologies for unprecedented value. Our new product team with decades of soft top knowledge and experience delivers you all the great features you want in a replacement top with unsurpassed customer service and support. Our QuadraTop is the best value in replacement soft tops compared to other tops costing hundreds more. If for any reason, you are not completely satisfied with your soft top purchase or have an installation question, please contact our professional customer support staff for a solution. All QuadraTops feature a limited Three year warranty against defects. The incredible fit & detailed instructions make installation as easy as... One, Two, Three!



"Order an In Stock New QuadraTop Soft Top for Delivery in the Lower 48 States Before 4pm Eastern Standard Time, and It'll Ship UPS Ground the Same Day. Ground Shipments take between 1-7 Business Days to Deliver. Need Your Top Faster? Expedited Shipping Options are Available with a UPS Air Freight Surcharge.



The Trusted Source

Quadratec Limited Warranty

for QuadraTop[®] Bimini & Bimini Plus Soft Sun Tops

Your QuadraTop Bimini top is covered by the following **Limited Warranty** provided exclusively by Quadratec, Inc. 1028 Saunders Lane, West Chester, PA 19380.

This **Limited Warranty** is the only warranty made in connection with purchase. Ouadratec neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**.

What is Covered:

Subject to the terms, exclusions and limitations herein and with respect only to soft tops first sold in the United States, Quadratec warrants to the initial retail purchaser only that your QuadraTop Bimini top shall be free of defects in material and workmanship for a period of 3 years from date of initial retail sale.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 3 years from date of initial retail sale. Quadratec reserves the rights to: (a.) require invoice or other proof your product is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

What is Not Covered:

Your Quadratec **Limited Warranty** does not cover products or parts Quadratec determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, failure to maintain or attempted repair or service by anyone not authorized by Quadratec, (b.) normal wear and tear, cosmetic damage or damage from water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage. Remedy Limited to Repair/Replacement: The exclusive remedy provided hereunder shall, upon Quadratec inspection and at Quadratec's option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration on QuadraTop soft top should first contact Quadratec to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither Quadratec nor any independent Quadratec distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©Quadratec, Inc. 2013. All Rights Reserved. Version 12.02.13 A4

The terms Quadratec[®], QuadraTop[®], Essentials[®] and Essential[®] are Registered Trademarks of Quadratec Inc. Registered in U.S. Patent and Trademark Office.

Part #12999.8003

