


CJ Replacement Mirrors

for Jeep CJ vehicles '55-'86

Installation and Instruction Manual
#23011.0002 and #23011.0003

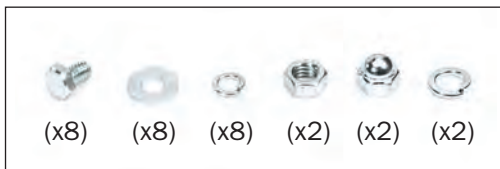

CAUTION

READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

REQUIRED TOOLS:

SAFETY GLASSES
T30 TORX DRIVER OR SOCKET
10MM SOCKET AND RACHET
12MM WRENCH AND SOCKET
17MM WRENCH
#2 PHILLIPS SCREWDRIVER

KIT CONTENTS LIST:

MIRROR HEADS & ARMS (2 EACH)
HEX FLAT HEAD CAP SCREWS (8)
FLAT WASHERS (8)
SMALL SPLIT WASHERS (8)
ON MIRROR HEADS:
HEX NUTS (2)
ACORN CAP NUTS (2)
LARGE SPLIT WASHERS (2)



The Trusted Source



Step One: Old Mirror Removal

Put on safety glasses. Remove old mirror by removing the (4) T30 torx fasteners that attach it to the windshield frame. Locate the appropriate Mirror for the first side you are installing. Mirrors are stickered "R" for right (passenger side) and "L" for left (driver side).



Step Two: Install Mirror Arm

Install the new mirror arm using the supplied hardware. Each of the four mounting holes should get a flat washer, a lock washer, and a bolt, in that order. Snug all four bolts using a 10mm wrench or socket. Do not over tighten.



Step Three: Attach Mirror Head

Attach mirror head to arm using the supplied nut. Use a 12mm wrench on the nut and a 17mm wrench on the mirror pivot. Then install the lock washer and acorn nut.



Snug the acorn nut and the standard nut together using a 12mm wrench and a 12mm socket. Do not over tighten.

⚠ CAUTION ⚠

READ ALL SAFETY MESSAGES AND ALWAYS WEAR SAFETY GLASSES WHEN WORKING WITH TOOLS.



The Trusted Source



Step Four: Adjust Arm Tension

Once the mirror head is installed, snug the bolt and nut that secure the mirror arm to the mounting bracket. Adjust the tension to achieve the desired setting of the mirror. Over tightening will not allow the mirror to be adjusted properly.



Step Five: Adjust Head Tension Screws

Adjust the 3 tension screws on the backside of the mirror in order to achieve proper adjustment. Once again, do not over tighten or you will not be able to properly adjust the mirror head. Periodic adjustment may be necessary to retain the correct tension. Finally, repeat all steps for mirror installation on the opposite side of vehicle.



The Trusted Source

Quadratec® Exclusive Three Year Limited Warranty

Your Quadratec® branded accessories are covered by the following **Limited Warranty** provided exclusively by Quadratec, Inc., 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. Quadratec neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**. This **Limited Warranty** does not apply and is not cumulative to any accessory or part distributed by Quadratec for which the Manufacturer provides a separate written warranty.

What is Covered: Subject to the terms, exclusions and limitations herein and with respect only to Quadratec branded accessories first sold in the United States, Quadratec warrants to the initial retail purchaser only that your Quadratec accessory shall be free of defects in material and workmanship: **for a period of three (3) years from date of retail purchase.**

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the Quadratec accessory is installed or other transfer third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 3 year from date of initial retail sale. Quadratec reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

What is Not Covered:

Your Quadratec **Limited Warranty** does not cover products or parts Quadratec determines to have been damaged by or subjected to:

(a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

Remedy Limited to Repair/Replacement:
The exclusive remedy provided hereunder shall, upon Quadratec inspection and at Quadratec's option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration should first contact Quadratec to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither Quadratec nor any independent Quadratec distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©Quadratec, Inc. 2013. All Rights Reserved.

Part # 12999.9022



The Trusted Source