

PIAA

Light Bar Instructions for 2007-13 Jeep Wrangler Jk

Part# 30759



*Note: picture may not reflect actual product.

PARTS AND HARDWARE INCLUDED

LIGHT BAR
2- END CAPS
2- 8MM X 60MM BUTTON HEAD BOLTS (BLACK)
2- 8MM NUTS (BLACK)
4- 8MM WASHERS (BLACK)
2 - 3/8" X 11/2" HEX HEAD BOLTS
2 - 3/8" FENDER WASHERS



TOOLS NEEDED
DRILL
3/8" DRILL BIT
RATCHET
SHORT EXTENSION
9/16" SOCKET
1/2" SOCKET
SMM ALLEN WRENCH
BLACK MARKER

CAREFULLY READ EACH STEP BEFORE ATTEMPTING TO INSTALL.

Step 1: Locate the two upper license plate screw holes in the factory bumper and drill them out using a 3/8" drill bit. Note: You must drill through the metal layer of the bumper which is 2" deeper than the plastic on the face of the bumper. See Figure 1.

Step 2: Using the supplied 8MM bolts hold the light bar in place as shown in Figure 2.

Installation Instructions

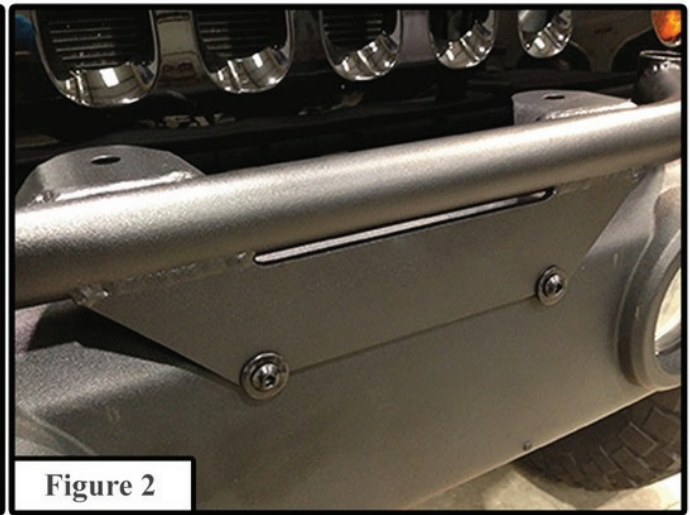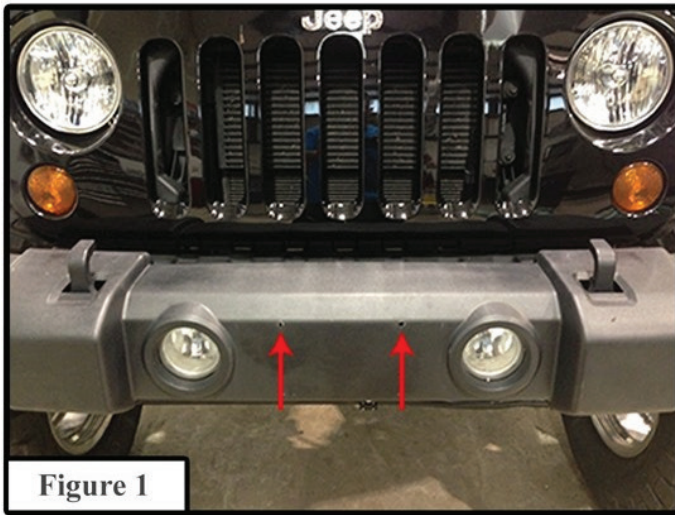

Step 3: Mark the upper mounting holes using a black marker as shown in Figure 3.

Step 4: Completely remove the light bar and hardware. Find your marks from Step 3 and drill them using a 3/8" drill bit. Note: You must drill through the metal layer below the plastic. See Figure 4.

Step 5: Hold the light bar in place and use 1 - SMM Bolt and Washer in each of the holes that you drilled in step 1. From the back side you need to install 1 - SMM Washer and Nut on each bolt. Note: Leave these loose for now.



Installation Instructions

Step 6: Using the supplied 3/8" Hex Head Bolts and Fender Washers you must screw them into the Hght bar from the inside the bumper. Once installed, tighten them all of the way as shown in Figure 5.

Step 7: Tighten the button head bolts that were Installed in Step 5 using a ratchet with a 1/2" socket and a 5:MM Allen Wrench.

Step 8: Install the two end caps as shown in Figure 6.



Warranty

PIAA Corp. USA warrants its product to be free from defects in workmanship and materials under normal use for a period of one year from the date of purchase.

EXCLUSIONS

This limited warranty specifically excludes defects resulting from misuse, abuse, neglect, alterations, modification, improper installation, unauthorized repairs, theft, vehicle crash, or any other type of impact. Except for the limited warranty stated above, there are no warranties of PIAA product or part thereof, whether express or implied. Any implied warranty of merchantability or any warranty of fitness for a particular purpose is expressly disclaimed. Some states do not permit the disclaimer of implied warranties.

EXCLUSION OF DAMAGES

In no event shall PIAA be liable for any damages whatsoever (including, without limitation, consequential damages, incidental damages, or damages for loss of use, loss business profits, business interruption, loss of business information, loss of time, inconvenience, or other losses) arising out of the use, misuse, or inability to use a PIAA product. PIAA reserves the right to change the design of its products without any obligation to modify and previous products. This warranty gives you specific legal rights. You may also have other rights that vary from state to state.

REPAIR AND REPLACEMENT

If a PIAA product is suspected of being defective, it must be submitted freight prepaid, to either an authorized dealer or distributor for warranty inspection. The receipt or other proof of purchase and a description of the problem must be included. The returned product will be inspected. If the product is found to be defective and covered by this limited warranty, the sole remedy is repair or replacement, at PIAA's option. A repaired or replacement product will be shipped back at no charge, and will be warranted free from defects in workmanship and materials under normal use as the original purchaser owns it. Removal, installation, or reinstallation costs are not covered by this limited warranty.

PIAA CORPORATION, USA
3004 NE 181st Avenue Portland, Oregon 97230
[Telephone: 503.489.6666](tel:503.489.6666) - [Fax: 503.489.6600](tel:503.489.6600) - [Web: www.piaa.com](http://www.piaa.com)