


For TECHNICAL SUPPORT Call:
1-800-343-7486

Monday- Friday 8:00 A.M. to 4:30 P.M. (PACIFIC)

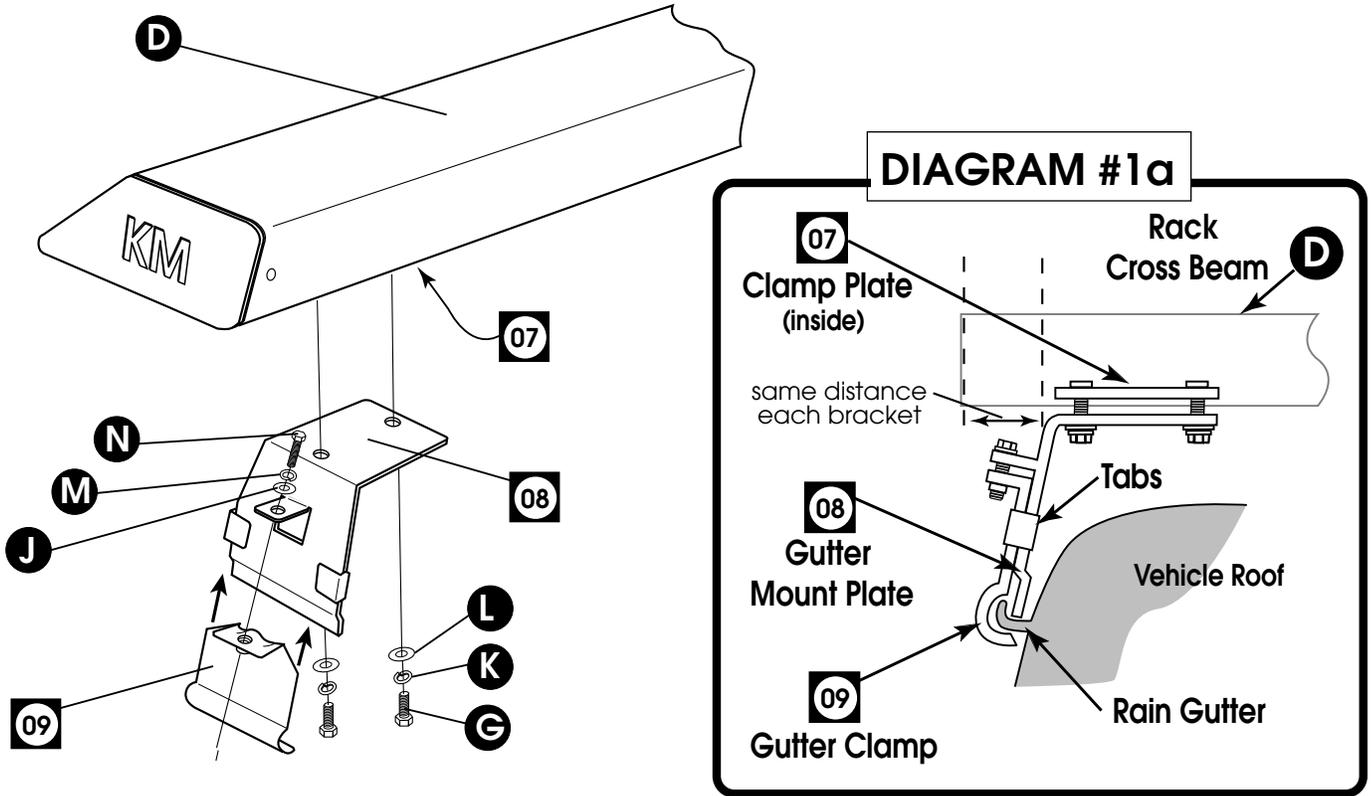

#1=Align mount plate holes with clamp plate holes (in cross beam) and attach gutter mount plates **08** with bolts **G**, lock washers **K**, and flat washers **L**, finger tight so mount can easily slide on cross beams.

#2= Now with one person on each side walk the rack from the rear of the vehicle and set in desired location front to rear, place with the lower edge of the gutter mount plates sitting in the rain gutters (per diagram #1a). Center rack side to side (by eye), then measure to ensure equal distance on all end caps to mount plates. (see diagram #1a)

Slide the gutter clamps **09** up between tabs on the gutter mount plates **08**. Secure with bolts **N**, lock washers **M**, and flat washers **J** and tighten. Tighten all bolts. THAT'S IT!

HARDWARE KIT FOR RAIN GUTTER MOUNT

G
(8 ea.)
 5/16" x 3/4"
 Hex Bolt



K
(8 ea.)
 5/16"
 Lock Washer



L
(8 ea.)
 5/16"
 SAE Flat Washer



N
(4 ea.)
 1/4" x 1"
 Hex Bolt



M
(4 ea.)
 1/4"
 Lock Washer



J
(4 ea.)
 1/4"
 SAE Flat Washer



Shown Actual Size