



**Bulb Replacement**  
5083059/5083060  
Auxiliary Lights

The 5083059 and 5083060 Auxiliary Lights use a 12 volt 55 w H3 Bulb

Image #1



1) Locate "Top" on the backside  
See Image #1

2) Grip light housing and turn  
plastic cap on back of the light  
counter clockwise 1/4 turn. See  
Image #2

3) Gently lift cap to reveal the  
back of the bulb and wires

Image #2

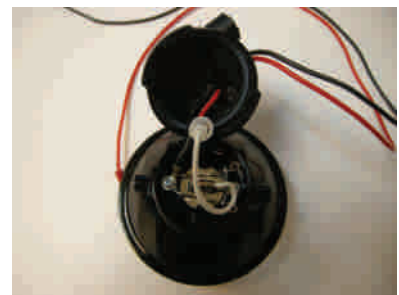


Image #3



4) Pull metal clips out from under  
bracket and remove bulb. See  
Image #3

5) Reinstall new bulb in reverse  
of removal. See Image #4

Image #4

