



Instructions and Limited Lifetime Warranty

Quadratec iVault® Security Stereo Console with External iPod - MP3 Attachment

For '76-'95 CJ & Wrangler #14026.215

THANK YOU!

NOTE: Be sure to read this entire instruction sheet before installation. This sheet outlines the installation of the Quadratec iVault® Security Stereo Console with External iPod - MP3 Attachment for '76-'95 CJ & Wrangler Vehicles. Please make sure all required hardware is present and proper tools are used for correct installation. **DRILLING REQUIRED.**

- Contents:**
- iVault Security Console
 - Parts Bag
- Tools Required:**
- Electric Drill
 - 3/8" Drill Bit
 - Marker or Pencil
 - Utility Knife
 - 1/2" Socket and Ratchet
 - 1/2" Wrench
 - 3/8" Wrench
 - 5/16" Wrench
 - Silicone Sealant (Optional)

- (7) 3/16" Washers
 - (4) 10-32 Acorn Nuts
 - (7) 10-32 x 1/2" Bolts
 - (3) 10-32 Nyloc Nuts
 - (1) 5 x 16 x 3/4" Bolt
 - (3) 5/16" Nyloc Nuts
 - (2) 5/16"x 5-1/2" Bolts
 - (6) 5/16" Washers
- Rubber Seal
- Stereo Support Strap



NOTE: This console has been designed to be used in a stock Jeep application. Some fitment issues may arise if installed in a vehicle that has been modified with a body lift, different transmission and/or transfer case and aftermarket seats. It is the owner's responsibility to address these fitment issues. If vehicle is equipped with a body, lift the transmission and transfer case shift levers may need to be bent to allow for proper fitment of console.



FIGURE 1. Using (4) #10-32x1/2" Bolts, (4) 3/16" Washers, and (4) #10-32 Acorn Nuts, attach both driver and passenger seat belt support straps. Make sure to place the washer on the outside of the strap.



FIGURE 2. Attach the rear riser bracket by inserting two (2) 10-32x1/2" bolts through the 1/4" holes on the bottom of the console. Fasten with (2) 3/16" washers followed by (2) #10-32 locknuts. Make sure the bracket is square and flush with the console before tightening.



FIGURE 3. Cut to length the rubber seal and apply at the edge of the lid's interior and check the lock operation.

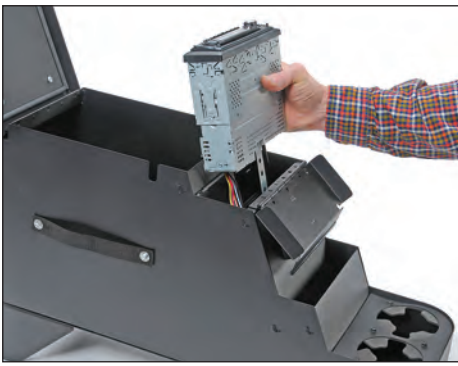


FIGURE 4. If you are not installing a radio please skip to step 6. Insert stereo assembly with attached wiring and stereo strap through the din slot. Fasten the other end of the stereo support strap at the 3/16" hole using a #10-32x1/2" bolt with 3/16" washer and secure with a #10-32 locknut. Connect all wires to the stereo according to your stereo owner's manual. Stereo wiring extensions may need to be fashioned or purchased separately.

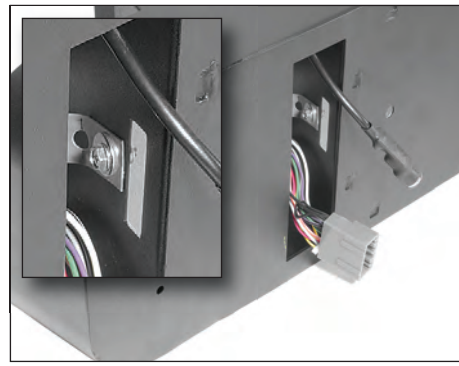


FIGURE 5. The metal stereo strap fastens to console wall as shown. If your stereo receiver features a rear auxiliary input, a rectangular opening is provided to allow the cord to pass through the inside of the main compartment.



FIGURE 6. Center the console between the front seats and position the console front and back to a position that ensures there is no interference with the transmission and transfer case shift levers. Some fold and tumble rear seats may make contact to the back of console when tumbled forward but it is imperative that your shifter levers and shifter boots operate without contacting the front of the console.



FIGURE 7. Mark the carpet and floor with a sharp pencil to determine bolt hole placement. Hint: Place strips of masking tape on top of the targeted carpet area to help with your markings. Pierce the tape with a sharp pencil to transfer the mark to the metal floor.



FIGURE 8. Remove the console and cut small 1" diameter holes in the carpet at your pencil marks. Drill 3/8" bolt holes at each of the three markings. Make sure to observe that nothing under the vehicle can be damaged by the passing drill bit. Use touch up paint or silicone sealant around the drilled holes if desired.



FIGURE 9. Note: A second person is necessary to assist with the final installation. Place your console back into position while running the seat belt buckle sleeves through the console's side seat belt straps as shown. Here's where assistance is helpful. Fasten the rear of the console to the floor using (2) 5/16" x 5-1/2" bolts with 5/16" washers on each. Place a washer and 5/16" locknut to each bolt and tighten. Fasten the front of the console through using the shorter 5/16" x 1-3/4" bolt with washer followed by a 5/16" washer and locknut and tighten. Install rubber floor mat to the console's interior. Console installation is now complete.



There are 3 MP3 cord management slots featured in your console to provide connectivity with security. MP3 devices can be stored, played and charged inside the console without compromising overall function. Note: Hook and loop fastener material can be applied to areas of your choice (not included) to position your mp3 device while driving.

QUADRATEC iVault® Security Stereo Console LIMITED LIFETIME WARRANTY

Your Quadratec® product is covered by the Lifetime Limited Warranty explained below that gives you specific legal rights. This limited warranty is the only warranty Quadratec Incorporated makes in connection with your product purchase. Parts sold by Quadratec Inc. but supplied by other vendors are exclusively warranted by the vendor supplying the part. Quadratec neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or Limited Warranty.

What is covered:

Subject to the terms, exclusions and limitations herein and with respect only to products first sold in the United States, Quadratec warrants to the initial retail purchaser only that it shall be free of defects in material and workmanship for so long as the initial retail purchaser owns the vehicle on which these products were originally installed. All other express or implied warranties are hereby disclaimed. Your warrantor for these parts is Quadratec, Inc., 1028 Saunders Lane, West Chester, PA 19380. Quadratec reserves the rights to: (a.) require proof of purchase as a condition of this Limited Warranty, (b.) make future revisions to its Limited Warranty without prior notice.

What is not covered:

Your Quadratec Limited Warranty does not cover products or parts supplied to Quadratec by outside vendors or products, parts or vehicles Quadratec determines to have been damaged by or subjected to: Installation damage, alteration, modification or failure to maintain. Normal scuffs, fading, scratches, wear and tear. Racing or other vehicle competitions or contests. Accidents, impact by rocks, trees, obstacles or other aspects of the environment. Theft, vandalism or other intentional damage.

Remedy Limited to Repair/Replacement:

The exclusive remedy provided hereunder shall, upon Quadratec inspection and at Quadratec's option, be either repair or replacement of product or parts covered under this Limited Warranty. Customers requesting warranty consideration on Quadratec branded parts should first contact Quadratec (610-701-3336) to obtain a Return Goods Authorization number. All removal, shipping and installation costs are customer's responsibility. Customers requesting warranty consideration on non-Quadratec branded parts should refer to the manufacturers' Limited Warranty and contact them directly.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

- In consideration of the purchase price paid, neither Quadratec nor any independent Quadratec distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

- This Limited Warranty gives you specific rights. You may also have other rights that vary from state to state. For example, while all implied warranties are disclaimed herein, any implied warranty required by law is limited to the terms of Limited Warranty described above. Some states do not allow limitations of how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

© Quadratec, Inc. 8.18.2009. All Rights Reserved.