



ARMORLITE

INSTALLATION INSTRUCTIONS

04-06 Wrangler LJ

Wheelhouse covers



GoArmorlite.com

If you have trouble at any point refer to our website support section, install videos, and tips and tricks are available.

GoArmorlite.com

If you continue having trouble, email us at orders@goarmorlite.com

SUGGESTED TOOLS

Gloves

T50 torx

Plastic trim tools

Optional trim pliers



Before we start:

- Remove your Armorlite from the box and bring it to a warm place and let it relax. You would get weird too if you were folded up in a box.
- Make sure your vehicle is in a stable environment with the parking brake engaged.
- Armorlite components are year and model specific, do not install in any other vehicle.
- We do not guarantee this floor will fit with any aftermarket product or modification, we do guarantee it will fit your vehicle in a stock situation.
- Armorlite replaces your carpet, do not install it over the top of your existing flooring.
- Do not use floor mats on top of your Armorlite floor. You don't need them, and they are a hazard.
- Make sure your floor is installed correctly before driving. Double check that the pedals are not obstructed before driving.
- Cutting the floor in areas not designated for cutting will void your warranty, if you are having fit issues, email us, including some clear pictures that have context of where your issue is will help us help you. orders@goarmorlite.com

-
1. Disconnect the negative terminal on your battery.
 2. Remove factory wheelhouse carpet, there are cut seams around the rollcage, these were not fully cut from the factory and may need a slice or pulled apart.
 3. Clean and vacuum the area prior to installing.
 4. Not required but you can remove the seatbelt retractor, The bolt uses a T50 Torx and will require an extension.



-
5. Start installing the Armorlite Wheelhouse at the rollcage using the slit to locate the cage to the round opening.



6. Tuck the top of the wheelhouse under the body.



-
7. Continue to tuck the entire length under the body flange.



8. Be sure the Armorlite is not stuck under bolts, wires etc.



9. Tuck the tab behind the sheet metal that holds the tailgate striker.



10. Push the front of the wheelhouse back behind the rolled cage. The front of the Wheelhouse will overlap the other flooring parts



11. If using the back seat mounts that are shaped like this, a clearance cut will need to be made to allow the bracket to line up with the rear bolt holes



12. Place the seat belt bolt in to make sure wheelhouse is in correct place. Line up bracket with holes in floor, and trace where contact will be made with Armorlite Wheelhouse



13. Using a sharp razor knife carefully cut away material in this space.



14. At this point your bracket should fit like this and allow boltholes to line up.




15. Clean the metal preferably with alcohol. Connect the velcro hook and loop together cut sections and place in key areas to secure bottom and rear of wheelhouse. Apply only to sheet metal first then check the fit of the wheelhouse before peeling back the remaining paper.





You're Done!

It should look like the installed pictures below, if it doesn't go through the steps again and see what you missed. If you still can't get it, email us at orders@goarmorlite.com.

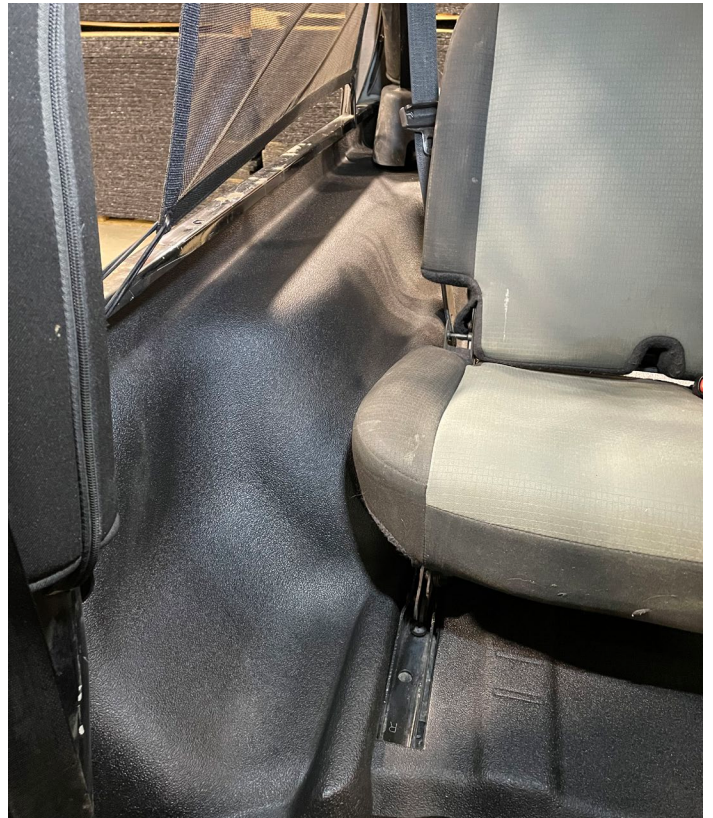

Cleaning and care:

In most cases water and a brush is all that is needed to clean your floor. Be sure to open your plugs before spraying the floor down with water.


Break up any mud then rinse down the drain.



Another method is to break up any mud with a brush vacuum clean. Afterwards, you can mist with water and wipe with a towel.

If your floor continues to look dusty or gray, use Armorlite's floor cleaner, which is available at GoArmorlite.com.

Lightly mist the floor with a small amount of floor cleaner, and wipe down with a towel.

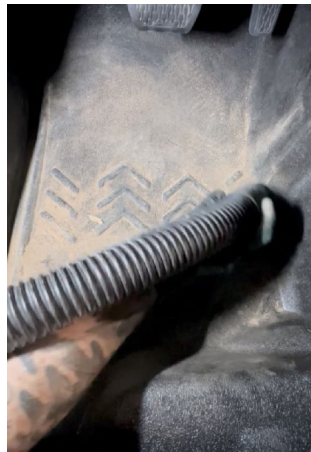

DO NOT use an excess amount of soap as it can make the floor slick.

Do NOT use any silicone-based products, or products that add shine, these can make the floor slick.

Keeping your floor clean will prolong the life of your Armorlite floor system.

We warranty the Armorlite floor system against normal off road and every day use wear and tear when properly maintained.