INSTALLATION INSTRUCTIONS FOR DYNOMAX KIT: 39445

2009-07 Jeep Wrangle JK 3.8L (2 Door), Dual Outlet Muffler



2701 N. Dettman Rd. Jackson, MI 49201

This kit features type 409 stainless steel tubing, type 304SS buffed & polished tips and a combination of type 304 and 409 stainless steels in the DynoMax Ultra Flo SS Muffler.

<u>Please remove the protective coating of mylar plastic that is wrapped</u> around the body of the 17558 muffler.

Thank you for choosing a DynoMax Performance Exhaust System for your Jeep JK.

Comments or suggestions? Go to Dynomax.com and send us an e-mail.

DANGER WARNING: SHOULD THE PURCHASER DECIDE TO INSTALL ANY EXHAUST PRODUCT AT HOME, BE WARNED THAT PASSENGER CAR OR LIGHT DUTY TRUCK/VAN "BUMPER" JACKS ARE INTENDED FOR EMERGENCY USE ONLY. THE USE OF FRAME CONTACT JACK STANDS IN CONJUNCTION WITH A FLOOR JACK AS MAIN SUPPORT IS HIGHLY RECOMMENDED TO MINIMIZE ACCIDENTAL DROPPING OF A VEHICLE DURING THE INSTALLATION PROCESS.


NOTE: Read all instructions before starting any work.

- 1. Remove the O.E. exhaust from behind the catalytic converters. Lubricate the rubber isolators with WD-40, or a similar product, to aid in removal of the metal rod hangers.
- 2. Install DynoMax front pipe **56119**. Insert the rod hangers into the rubber isolator. Slightly tighten the $2\frac{1}{2}$ " clamp on the inlet end.
- 3. Install DynoMax Ultra Flo Welded muffler 17558 and LH dual tail pipe 52318. Slightly tighten the 2½" clamps that connect the muffler to the outlet of the front pipe and the 52318 tail pipe to the LH outlet of the 17558 muffler. Be sure to insert the metal rod hangers into the rubber isolators. See the system diagram on the back page of these instructions.

- 4. Beginning at the inlet end, align the exhaust components and fully tighten all the clamps.
- 5. Please see the system diagram on the back page of these instructions.

KIT CONTAINS:

(1) 17558 ULTRA FLO SS MUFFLER
(1) 56119 FRONT PIPE
(1) 52318 TAIL PIPE
(1) 2¹/₂" U-BOLT CLAMP
(2) 2¹/₂" BAND CLAMPS
(1) 709037 INSTRUCTION SHEET

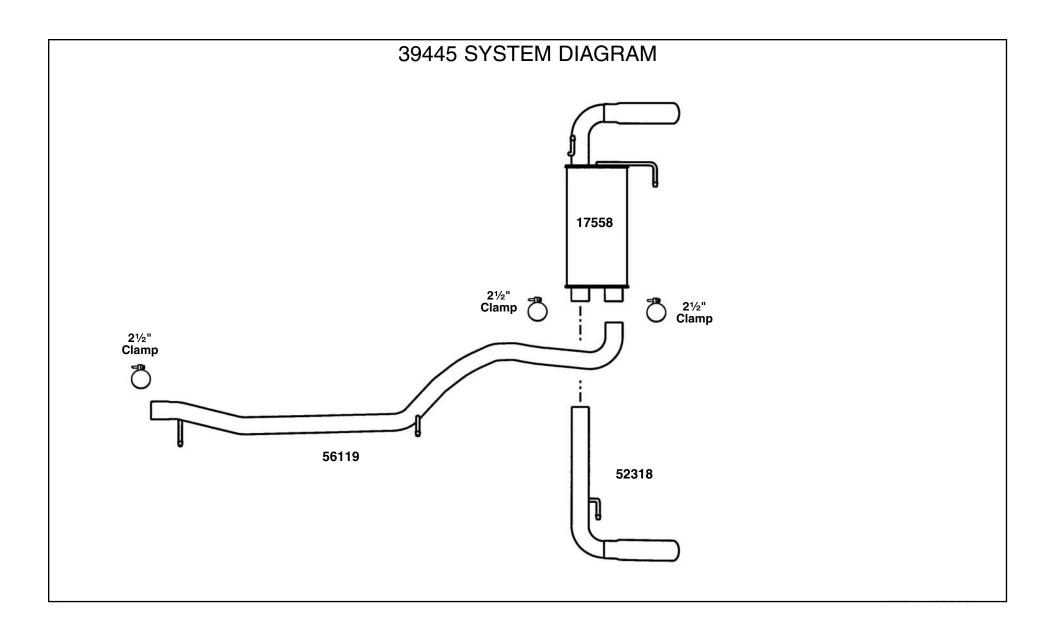

Form: 709037 02/09