


## Rim Protector Ring


### Contents:

1. Rim Protector Ring (1)
2. M6 Flanged Hex Head Screws (14)

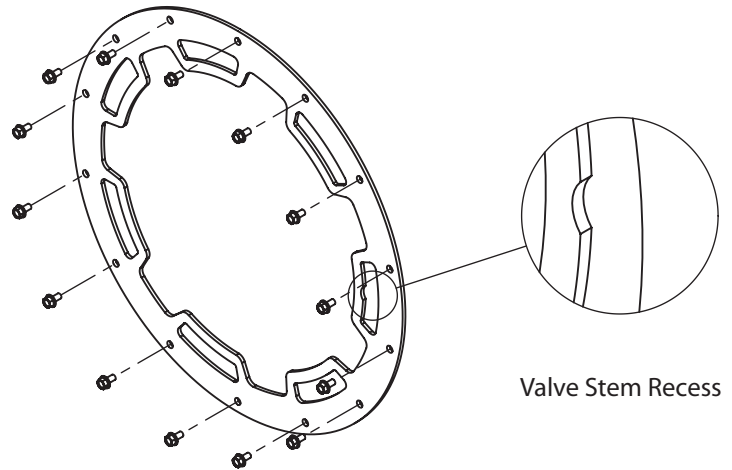


Note: Only to be used with Rugged Ridge 17" wheels, P/N's 15301.01, 15301.10, and 15301.40

1. Remove Button Head screws from wheel.

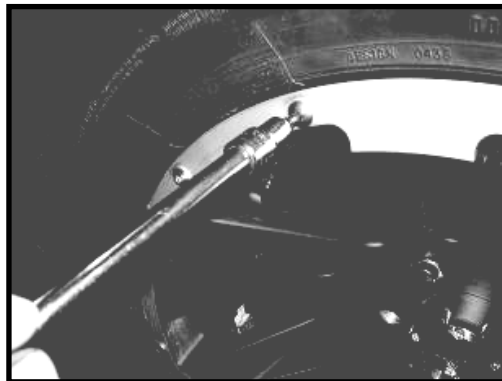

2. Place Rim Protector Ring onto front face of wheel. Ensure that Valve Stem Recess aligns with Valve Stem. Install M6 Flanged Hex Head Screws by hand. Once all M6 Screws are in place, tighten to 6 ft-lbs. Retorque after 25 miles and check frequently thereafter.

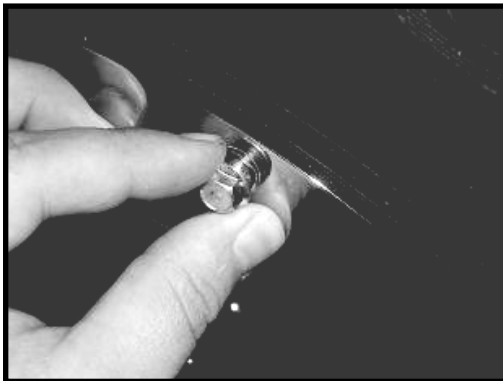

© Copyright 2009, Omix-Ada

Omix-Ada Inc.  
460 Horizon Dr. Suite 400  
Suwanee, Georgia 30024