

Wrangler Grille Screen

Installation Instructions

This package contains: 1 screen assembly, 4 bolts, 4 grip nuts, 4 lockwashers.

Tools needed: Phillips screwdriver, pencil, and masking tape if necessary.

1. Wash grille and surrounding sheet metal of vehicle. Dry completely. We recommend apply a coat of high quality automotive wax to front end of vehicle before installing grille screen. Follow instructions on wax container.
2. If hood lock is to be installed, it should be done first. Follow instructions included with lock.
3. Hold grille screen in position on vehicle, and using pencil, mark a hole in each corner for mounting bolts. Be sure to mark holes as closed as possible to corner of grille opening. See drawing.

NOTE: On air-conditioned vehicles, check that bolts will not interfere with condenser. If necessary, mounting bolts may be shortened or shorter bolts may be substituted.

IMPORTANT: For best fit, see bolt locations shown on the front side of this sheet. These locations have proven to be the best for holding the screen flat against the vehicle grille, but other bolt locations may be used if necessary to clear other accessories or attachments. However, ALWAYS make sure that each bolt is at a corner of a grille opening.

4. Assemble mounting bolts, lockwashers, and grip nuts as shown in drawing through holes marked in screen.
5. Hold screen in position on vehicle and work grip nuts into position so that edge of grip nut hooks over inside edge of grille sheet metal. To make this step easier, screen may be held in place with masking tape, and a broom straw or similar object may be used through nearby holes in screen to guide grip nuts into position while tightening mounting bolts.
NOTE: IMPORTANT! On vehicles with chrome grille overlay, make sure that grip nuts are hooked over inside edges of BOTH grille sheet metal AND chrome overlay.
6. Tighten mounting bolts while making sure that grip nuts are securely hooked over inside edge of grille sheet metal. DO NOT over-tighten bolts. Make sure that bolt heads and lockwashers are flat against screen. If a bolt is not seated properly, choose another hole for that bolt. Overtightening bolts may cause screen to bow. Bolts can be loosened slightly until screen stays flat. Bolts may also be moved to other hole positions to help screen stay flat.

MAINTENANCE: Periodically wash grille screen with clear water. DO NOT wax grille screen. Your grille screen is made of rust-proof aluminum and no other maintenance is necessary.

LIMITED WARRANTY



This product is guaranteed against defects in materials and workmanship for one year from date of purchase. Just return to us with an explanation of reason for return and unit will be repaired or replaced at our option. There are no other warranties either expressed or implied beyond those set forth in this warranty. The manufacturer is not responsible for any consequential or incidental damages. (Some states do not allow the exclusion of consequential or incidental damages so the above exclusion may not apply to you.) This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Manufactured by:



P.O. Box 14532 • Lenexa, Kansas 66285

Made in U.S.A.

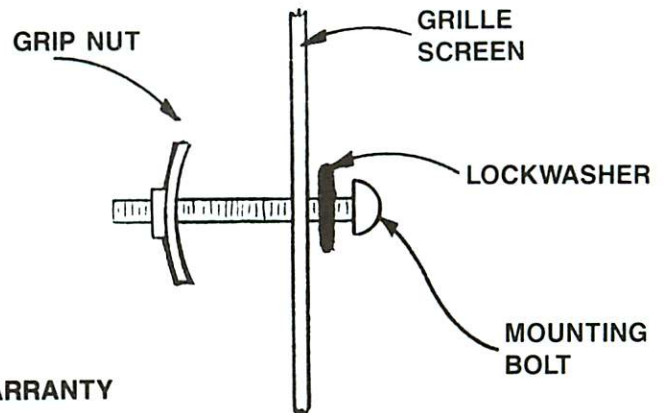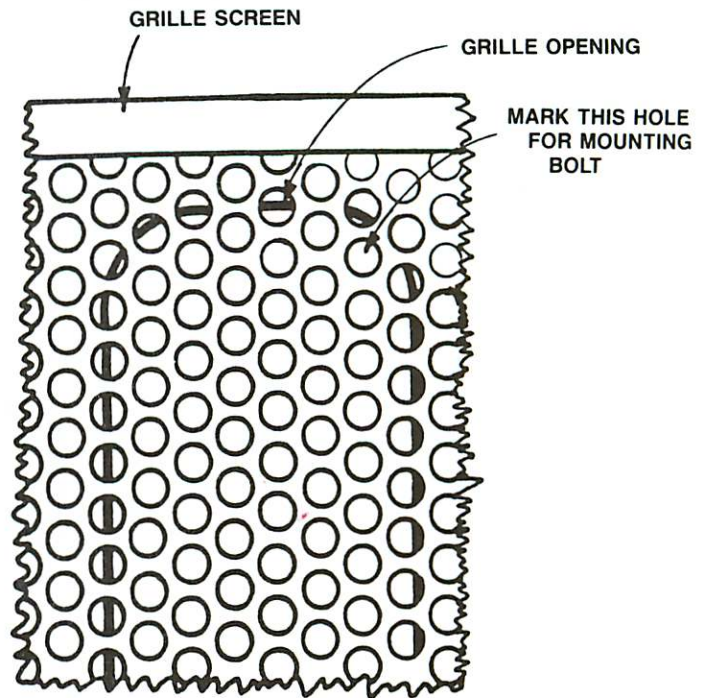

Grille Screen

For All Jeep Wrangler Vehicles

- Features:**
- Protects radiator from stones, insects and debris
 - May be used with OR without Wrangler Hook Lock
 - Rustproof heavy gauge aluminum construction
 - Installs in 10 minutes! NO drilling!
 - Rustproof Stainless Steel mounting bolts included




**NO-DRILL™
ACCESSORIES**

MADE IN USA

For 1987-1995 YJ-Style Wranglers:

Model: #GS-2A


#GS-2B

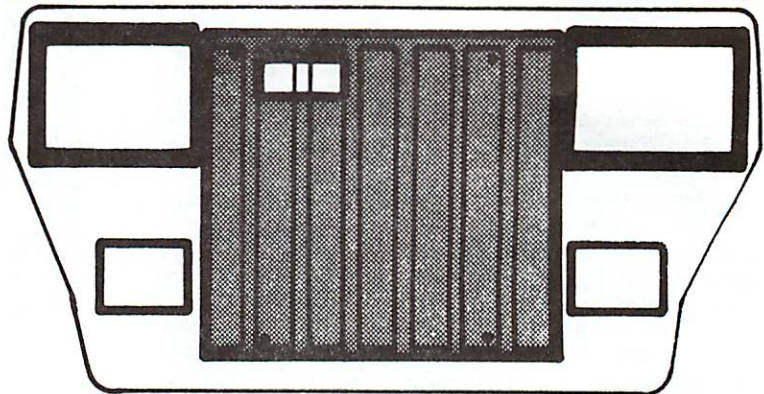

For TJ-Style Wranglers:

Model: #GS-3A

#GS-3B

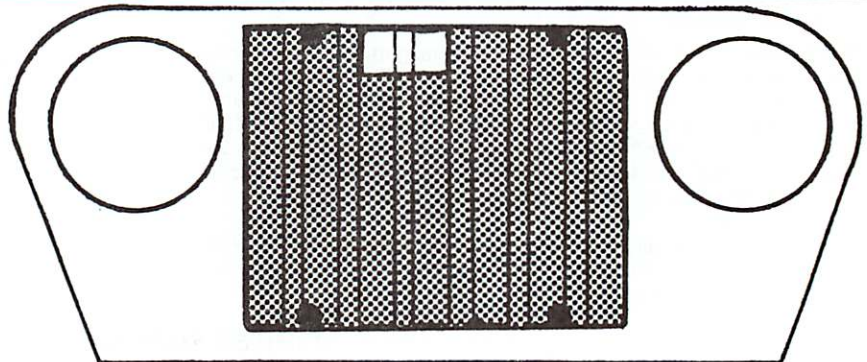

Stock No.:



P.O. Box 14532 • Lenexa, KS 66285

Installation instruction on reverse side.

**DO NOT discard package WITHOUT
removing enclosed hardware packet.**