

Installation Instructions

88-95 Jeep Wrangler Replacement Top

Locate Top and remove rear quarter windows from top. Once you remove the windows orient it on the vehicle.
NOTE: Install the Top with the spreader bar lowered (remove pin, lower Spreader Bar), front support bow all the way forward and rear support bow slightly forward to install the corners (Figure 1).

2. Snap the Top to the center and rear Bow Assemblies (Figure 2).



Figure 1

Figure 2

3. Insert the front of the top into the Windshield Channel (Figure 3).

4. Insert rear corners of top into rear Corner Belt Rail (Figure 4). **NOTE:** Make sure the plastic reinforcement is not caught under Corner Belt Rail.



Figure 3

Figure 4

5. Pull the bottom of the rear support bow back until it snaps into the notch in the Side Belt Rail (Figure 5). **NOTE:** Bow must slip into notch in Side Belt Rail.

6. Push the Spreader Bars up until they snap into place (Figure 6).




Figure 5

Figure 6

7. Start horizontal and vertical zippers on the Quarter Window about 4-6 inches (Figure 7).

8. Insert the plastic strip on the front of the Quarter Window into channel on the front support bow (Figure 7).

9. Insert the plastic strip on the bottom of the Quarter Window into the Side Belt Rail (Figure 7). **NOTE:** Start at one end of the strip and work along it to the other end. Close the horizontal and vertical zippers on the Quarter Window. Repeat this step for opposite side.

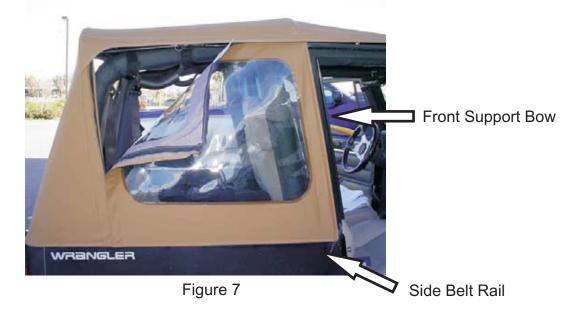

10. Open tailgate and attach rear window to top by closing the upper zipper only.

- 11. Slide the tailgate bar into Rear Window extrusion located on the bottom of the rear window (Figure 8)
- 12. Close the Rear Window zippers. Push the Tailgate Bar into the top of the Tailgate Brackets (Figure 9).



Figure 8



13. Slip the plastic strip on the corner bottom of the Rear Window under the Tailgate Bracket (Figure 10).

14. Fasten snaps on the top, to studs along the track above the doors (Figure 11). Studs will slide to the proper location for the snap.



Figure 10

Figure 11

15. Locate Weather Strip and attach it to tailgate by inserting tailgate into the channel on the Weather Strip. **NOTE:** Make sure the Weather Strip is fully engage before closing the tailgate.

Upper Door Installation/Adjusting Instructions

16. Install the upper half door onto the vehicle door. Insert the bottom flap of the door fabric into the channel on the vehicle door.

17. Now tighten the bottom velcro to achieve the desired fabric to frame to retaining strip tension (Figure 12).

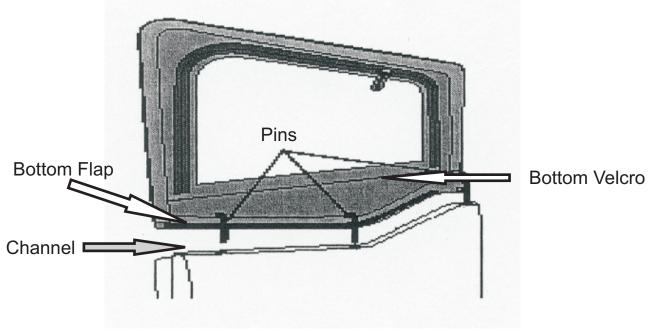


Figure 12

LIMITED 2 YEAR WARRANTY

Applies to Complete Top by Rampage Products

Rampage Products (the company) warrants to the original purchaser of this product that should the product or any part thereof, under normal use and conditions, be proven defective in material or workmanship within 2 years from the date of original purchase, such defect(s) will be repaired or replaced (at the Company's option) without charge for parts or repair labor. Please note that installation labor to remove or install this product is not covered under this limited warranty. To obtain repair or replacement within the terms of this Warranty, the product is to be delivered with proof of warranty coverage

(e.g. dated bill of sale), specification of defect(s), freight pre-paid to the place of purchase or, you must contact Rampage Products at the number below for warranty service or to obtain a Return Goods Authorization Number. <u>NOTE</u>: Items returned to Rampage Products without an Authorized Returns Good Authorization number will be refused and returned back to sender at the senders expense.

This warranty does not apply to any product or part thereof which, in the opinion of the Company, has suffered or been damaged through alteration, improper installation, mishandling, misuse, neglect, accident or by acts of nature. THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY PURCHASER FOR THE PRODUCT.

This warranty is in lieu of all express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN A PERIOD OF 90 DAYS FROM DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than expressed herein in connection with the sale of this product. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage, therefore above limitations may not apply to you. This Warranty gives the purchaser specific legal rights. The purchaser may have additional rights, which vary from state to state.