

IMPORTANT NOTICE:

Carefully read the instructions before attempting to install this product. The manufacturer is in no way responsible for any damage to the vehicle or personal injury that may occur during the installation or use of this product.

NOTE: During shipping product might lose its convex shape or the bars may bend slightly. In order to get a proper fit, product might need to be re-shaped slightly by bending it BY HAND to regain its convex shape. Be careful not to damage the Billet Grille when bending.

INCLUDED COMPONENTS

- 1 – Billet Grille (7 pieces)
- 14 – 75mm*19mm Metal Brackets
- 28 – M4*16mm Phillips Screws
- 28 – M4 Flange Nuts



Figure 1 – Included Hardware

TOOLS REQUIRED

- Phillips Screw Driver
- 4mm wrench

INSTALLATION INSTRUCTIONS

1. Inspect product and check components with items listed above.
2. Pop Hood, remove plastic shroud at the top and set fasteners aside.
3. **Optional:** Using factory instructions, remove the entire front grille shell (as pictured in all Figures).
4. Position one piece of Billet Grilles onto grille shell cavity (Figure 2).

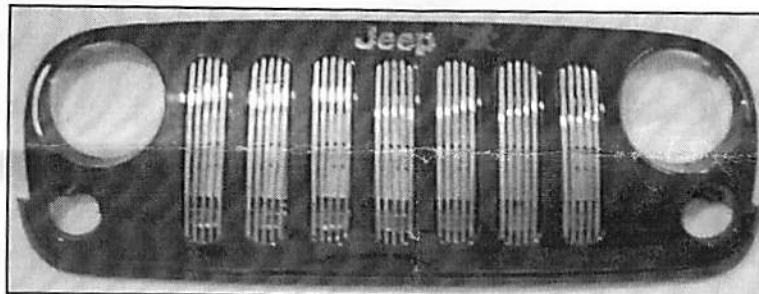


Figure 2 – Front View of positioning lower Billet Grille

5. **Loosely** attach the Billet Grille by holding the Metal Brackets behind factory grille shell and inserting the Phillips Screws (from the front) through the Billet Grille holes and Metal Brackets, secure them with Flange Nuts provided (Figure 3).

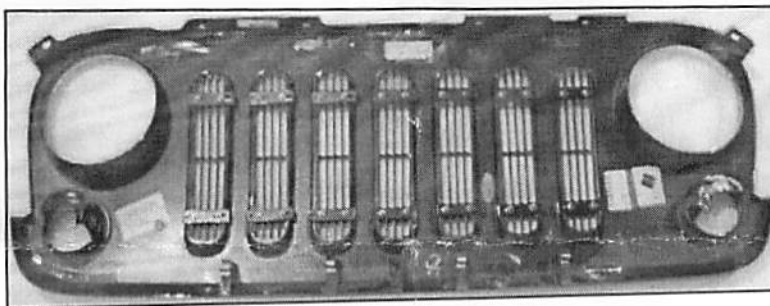


Figure 3 – Rear view of vehicle's shell; Billet Grills attached with Metal Brackets and Flange Nuts

6. Repeat Steps 4 and 5 for the rest of Billet Grille pieces.
7. Once the Billet Grilles are loosely attached, center them and tighten all Phillips Screws at the same rate.
8. Reinstall the plastic shroud with the fasteners removed in Step 2.

