



Installation Instructions

84665 / 86665

JK Headlight guard


Included:

2 Headlight guards
3M Mounting tape pads

Instructions:

- 1) Prepare the headlights and headlight guards by wiping the appropriate surface where the tape will be applied with a glass cleaner. **NOTE:** It is also a good idea to clean the inside of the headlight opening to ensure dirt will not scratch the paint surface when installing the guards.
- 2) Apply 3 tape strips to the rear of each headlight guard anywhere around the perimeter except where the three mounting tabs are installed.
- 3) Remove the tape backing. Now slip the light guard through the headlight opening and snap onto the perimeter of the headlight bezel as shown below. Be sure the uprights of the guard are vertical when slipping them in place. Also be sure the mounting tabs are positioned so they will not interfere with the headlight mounts on the vehicle.

NOTE: The tabs are made to spring load against the sides of the headlight, it should be necessary to lightly spring them open to install on the headlight. If they are not tight against the headlight, *carefully* bend them in slightly to increase the spring effect.

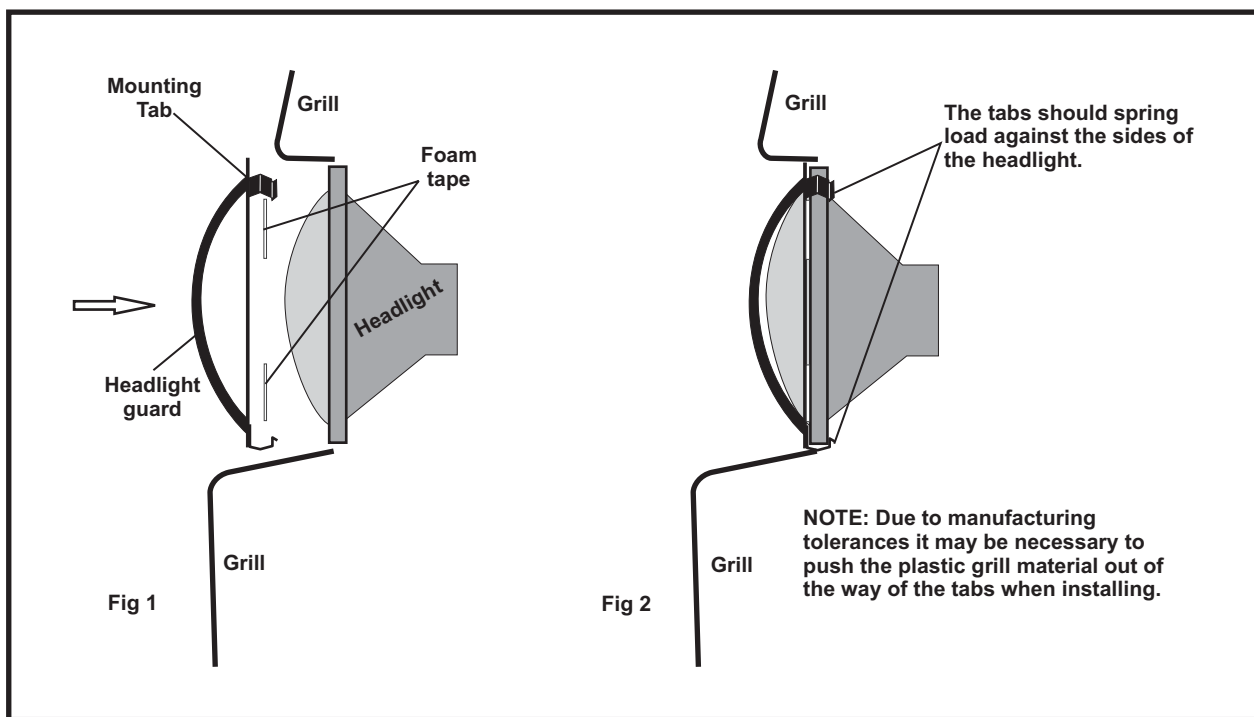

Rampage Products Inc., Corona, CA 92883-4919

Phone: (951) 277-4949 Fax: (951) 277-2295

Web: info@rampageproducts.net

Made in Taiwan