

# Turn Signal Switch, Black, 46-71 Willy's/Jeep

CONTENTS: Turn Signal Switch (1)  
 Clamp (1)  
 Fused Positive Wire (1)




## DESCRIPTION

The directional signal lever is a three-position control lever. When the lever is pushed to the right, the signal lights on the right front and rear will start flashing. When the lever is pushed to the left, the signal light on the left front and rear will start flashing. When the lever is moved to the center position, the signal light will go off. The hazard warning button is a two-position control button. When the button is pulled to the "on" position, all of the signal lights on the front and rear will start flashing to indicate an emergency. The hazard warning can return to the "off" position by moving the lever to either left or right position. When the brake is applied, both rear brake lights will go on.

## INSTALLATION

- Step 1. Unscrew the band of the clamp until it is open. Place the clamp around the steering column and feed the clamp band into the worm screw. Start the clamp band feeding through the worm screw slightly.
- Step 2. Insert the directional switch housing onto the clamp by sliding the tab edge of the housing onto the clamp. Tighten the clamp snug to the steering column.
- Step 3. Follow the wiring diagram below for proper wiring.

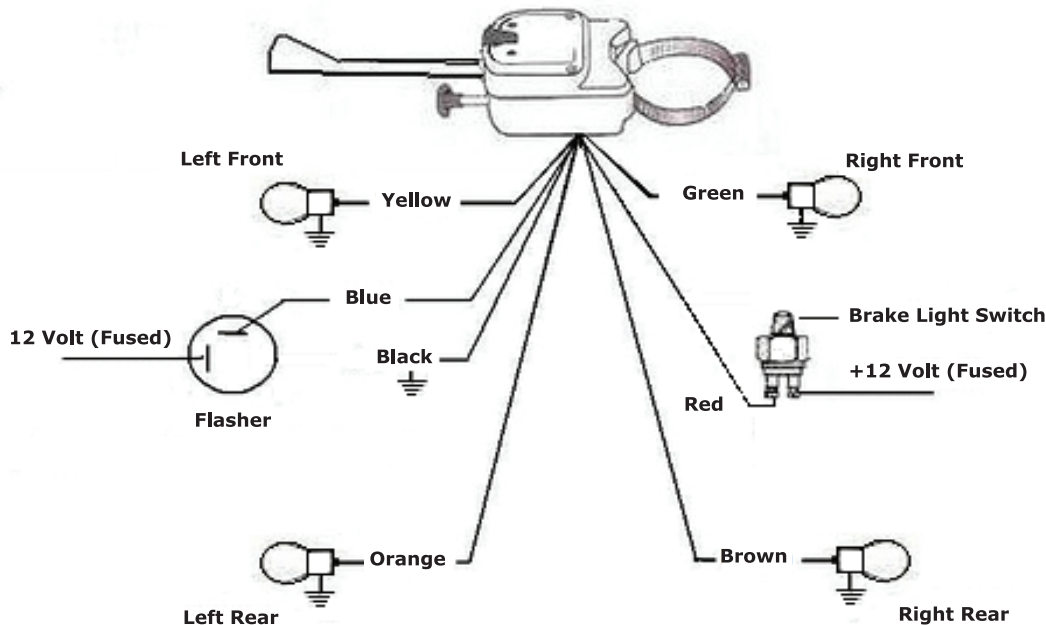

### OMIX-ADA® TECHNICAL SUPPORT

PHONE: M-F 8 am - 5 pm EST 1-800-449-6649 | EMAIL: techsupport@omix-ada.com

FOR WARRANTY INFORMATION VISIT [WWW.OMIX-ADA.COM](http://WWW.OMIX-ADA.COM)