WILDERNESS JEEP® SWING AWAY TIRE SYSTEM Ax and Shovel Mounting Brackets

General Assembly Drawing


Part No. 34950



PAGE 1 OF 1

Shovel must be on top mount and ax on the lower mount.

Shovel must go on top brackets.

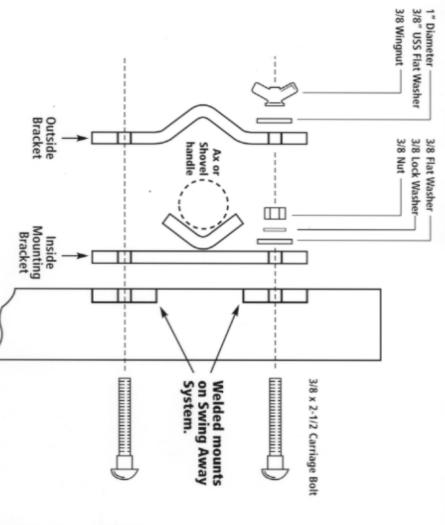

HARDWARE LIST

- 4 Inside mounting brackets
- 4 Outside brackets
- 8 3/8" x 2-1/2" Carriage bolts
- 8 3/8" Wingnuts
- 8 3/8" Nuts
- 16 3/8" Flat washers 1" dia.
- 8 3/8" Lock washers