




## Part # 2011 JK Fender Mount 2013 - 17

Included:  
Aluminum Trigger Mount ("L").  
Wing Bolt  
4x Mounting Screws/nuts



### Installation:

- 1) Use the 4 included screws and nuts to attach the Trigger controller to the bracket.
- 2) Remove inner fender bolt shown at "A".
- 3) Slide Trigger/mount assy into the area next to the battery as shown below.
- 4) Use included Wing bolt to attach the Controller assy to the fender inner where the factory bolt was removed.

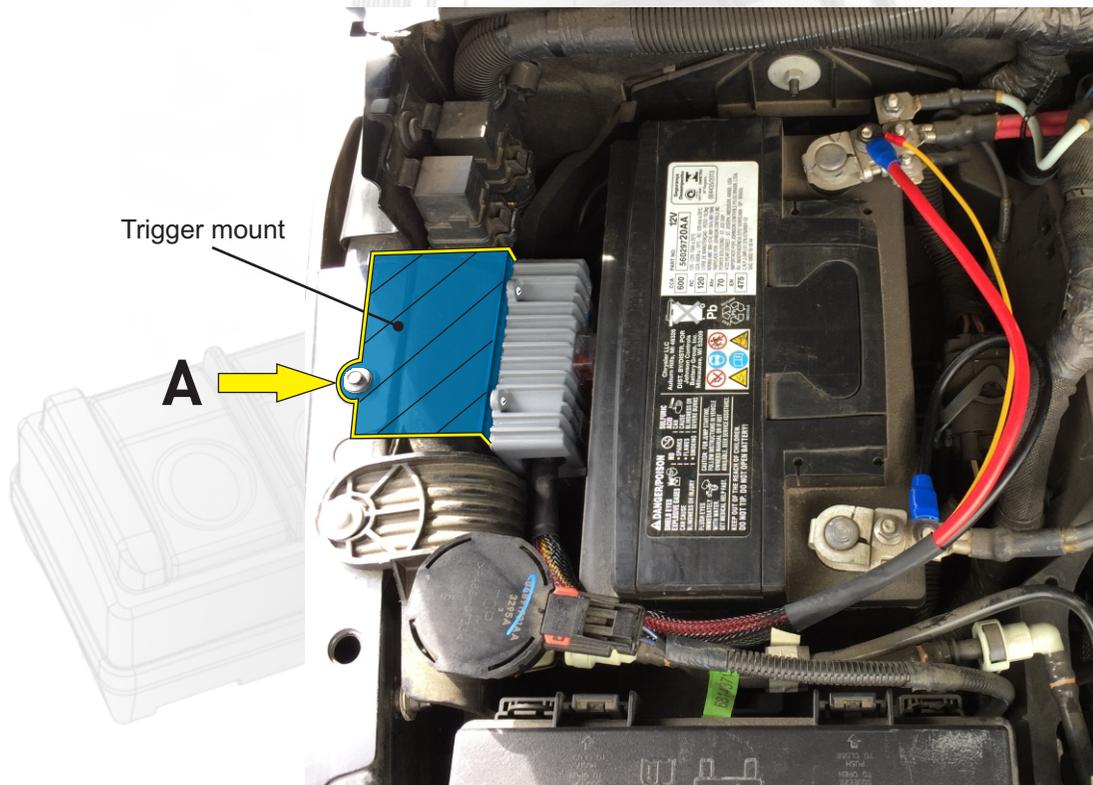

**NOTE:** Route wires as required depending on installation requirements.

**NOTE:** Use Wing Bolt to quickly remove assembly as needed to check fuses and/or circuits.