


Included:  
Aluminum Trigger Mount ("JL").  
6 mm x 16 mm Bolt  
4x Trigger Mounting Screws/nuts

**Installation:**

- 1) Use the 4 included screws and nuts to attach the Trigger controller to the bracket.
- 2) Remove inner fender bolt shown at "A".
- 3) Slide Trigger/mount assy into the area next to the battery as shown below.
- 4) Use included 6 mm bolt and the factory bolt to attach the Controller assy to the fender inner where the factory bolt was removed. **NOTE:** If a factory bolt is installed at both locations use factory bolts for installation.

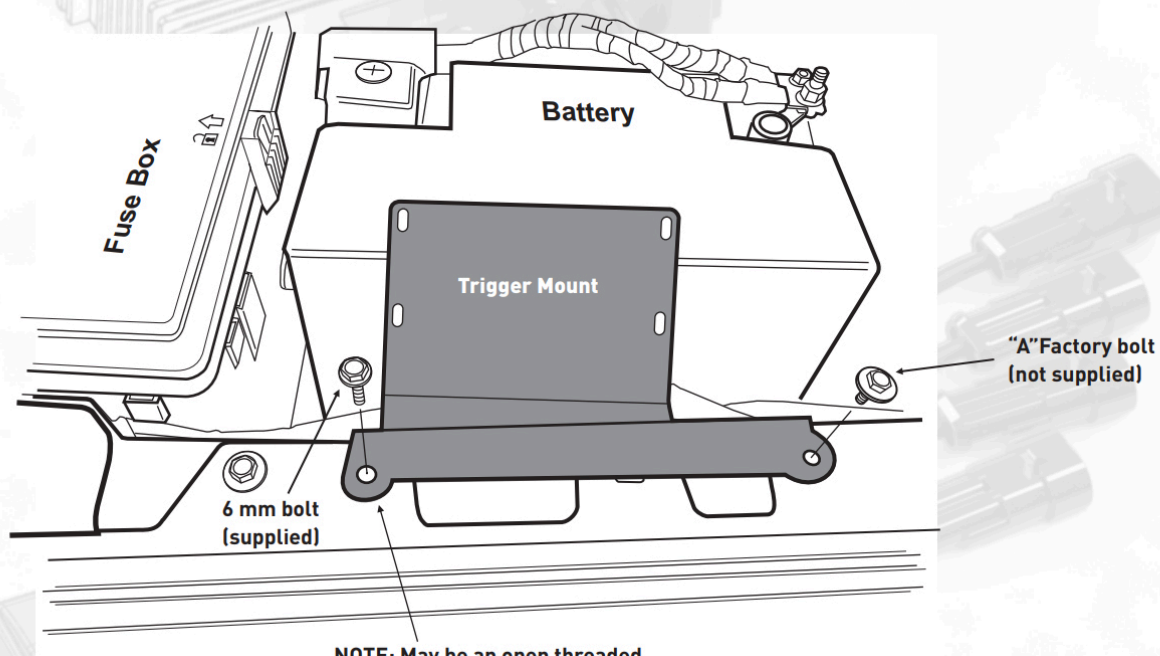

**NOTE:** May be an open threaded hole or have a factory bolt. Use factory bolt if it is there.

**NOTE:** Route wires as required depending on installation.