

550- Rock Rear Bumpers for Wrangler and CJ's

On some model Jeeps, bumperettes must be removed, they cannot be used with Rock rear bumpers. Olympic 4x4 Products are serviced by our factory. We provide answers to installation questions. We ship parts ASAP. Try us before the hassle of returning Olympic 4x4 Products to your retailer or mail order specialist. **For assistance please call (800) 777-0878.**



550-12X 57" Rock Bumper on TJ Wrangler.

Hardware list

550-12X

4 7/16" Flange nut

550-11X

8 7/16" Flange nut

550-10X

4 7/16" Flange nut
2 7/16" X 1 1/4" Hex head bolt
2 7/16" Flat washer
2 7/16" Lock washer

Tools Required

1/2" or 3/8" drive ratchet wrench
Socket sizes: 5/8", 11/16"
Combination wrench sizes: 5/8", 11/16"

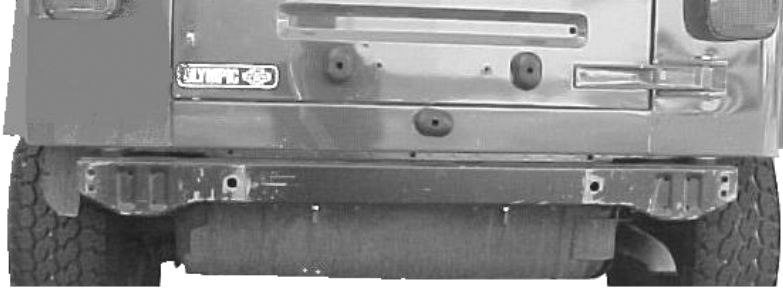


Photo 1

Step 1. Remove OEM bumper to expose rear cross member. See photo 1.

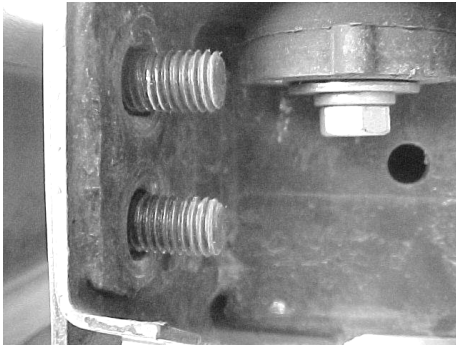


Photo 2

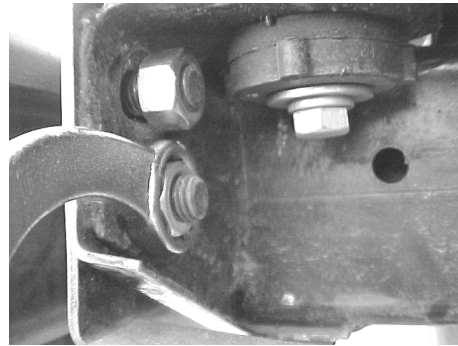


Photo 3

Step 2. Position bumper so that the threaded bolts that are welded to the bumper install through the rear cross member on your jeep. Secure the bumper to the rear cross member using 7/16" flange nuts on the threaded bolts that are welded to the bumper. See photos 2&3.

Note: On Jeep CJ bumpers install the 7/16" x 1 1/4" hex head bolt, lock washer and flat washer through the mounting bracket that follows along the bottom of the frame and into the hole in your frame that has a nut welded inside the frame.

Step 3. After 500 miles or first off-road trip re-check tightness on all nuts and bolts.