


P/N: LLR-R21-D035 Use with Dana® 35

www.LUBELOCKER.com

Throw your RTV away!

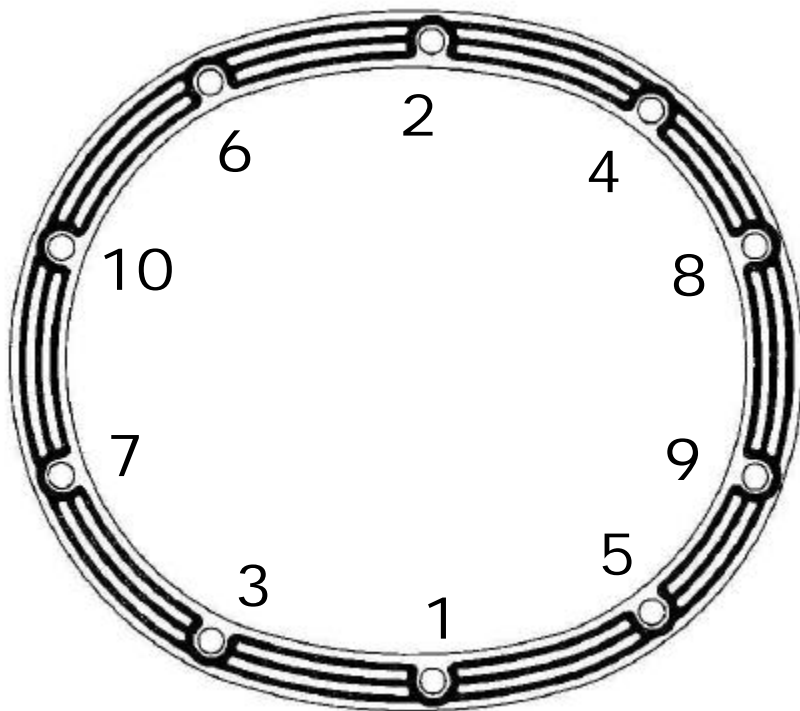

Follow torque
sequence twice

1st: 15 ft-lbs

2nd: 35 ft-lbs

Features:

- Gasket installs "DRY" – no sealant needed
- Will not split or extrude during installation
- Full perimeter elastomer beading
- Steel base material
- Superior torque retention