


P/N: LLR-120-044

Use with Dana[®] 44

WWW. **LUBELOCKER**[™] .COM

Throw your RTV away!

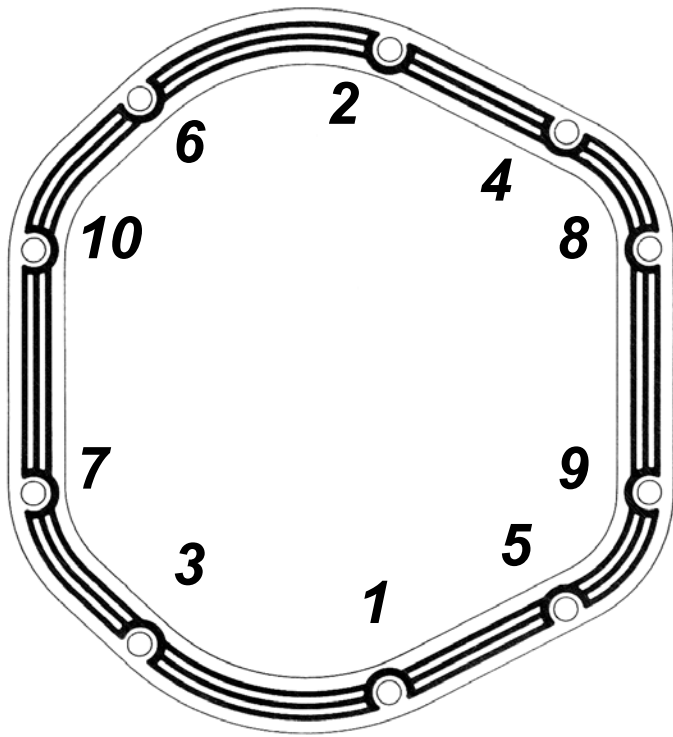

Follow torque
sequence twice
1st: 15 ft-lbs
2nd: 35 ft-lbs

Features:

- Gasket installs “DRY”—no sealant needed
- Will not split or extrude during installation
- Full perimeter elastomer beading
- Steel base material
- Superior torque retention