
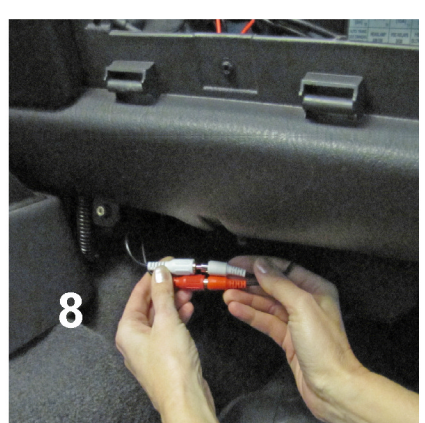
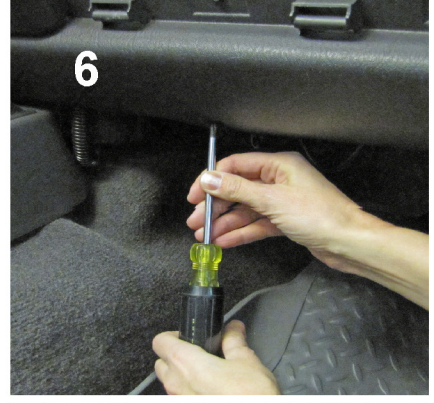
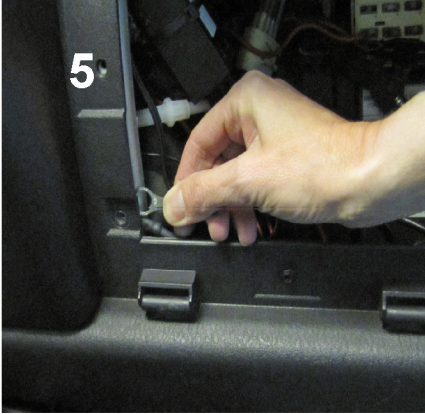
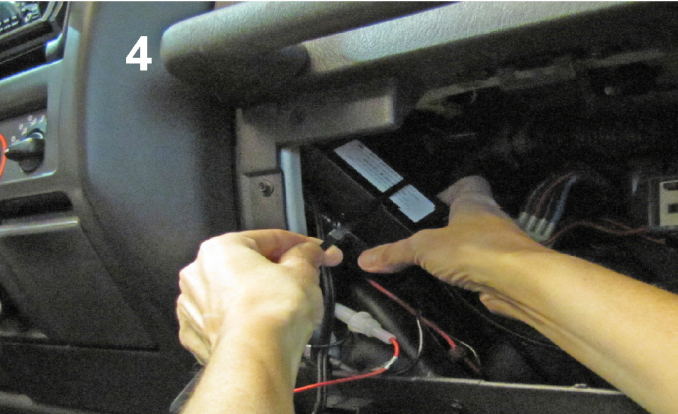
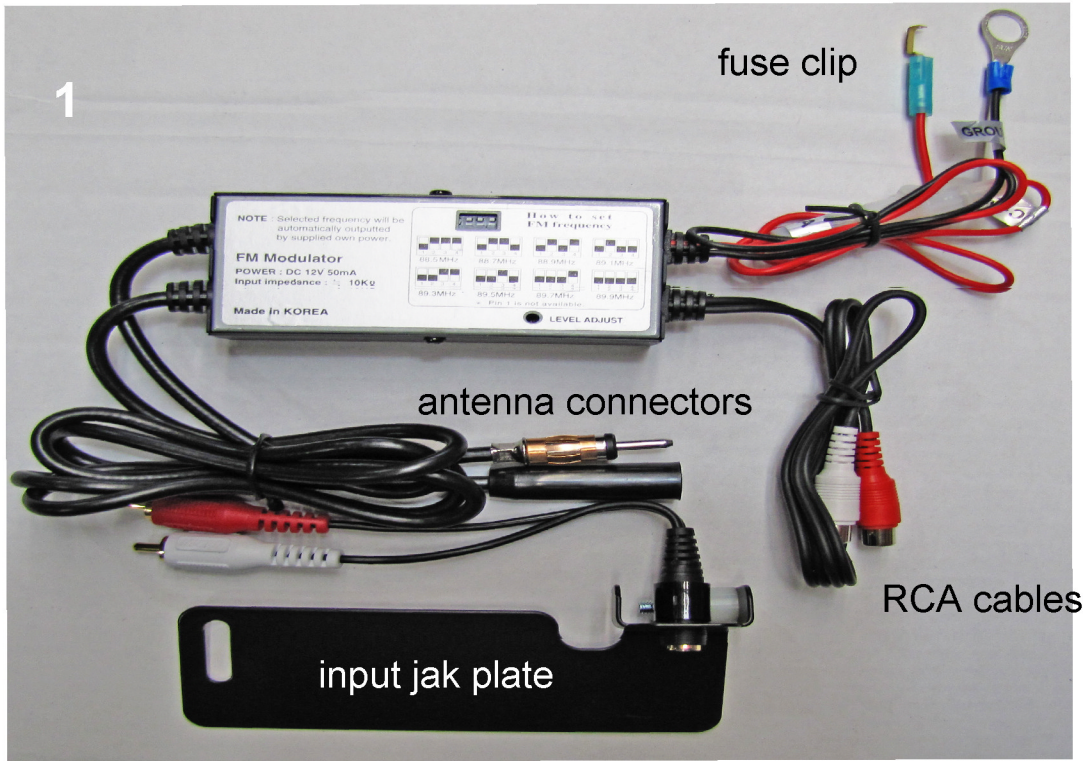
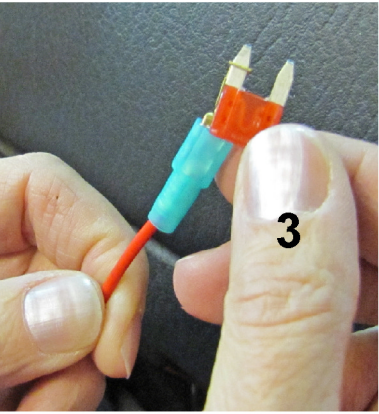


**INSTALLATION : CAUTION ! ALWAYS DISCONNECT THE NEGATIVE BATTERY TERMINAL BEFORE DOING ANY ELECTRICAL WORK ON YOUR VEHICLE.**

1. Remove glove box to expose fuse panel.
2. Locate radio fuse in fuse panel and remove fuse [ red 10 amp fuse ] (see figure 2).
3. Take red wire with blue connector on one end, and slide fuse clip over radio fuse ( see figure 3). Re-install fuse making sure the side of fuse with clip, plugs into the left hand pin on fuse panel (see figure 2).
4. Mount adapter box using the long strap that is supplied in kit . Leave the tie strap loose until you are done in case you have to change the adapter frequency. (see figure 4).
5. Attach the black ground cable under the glove box screw (see figure 5).
6. Remove screw from under dash (see figure 6) and install switch plate by sliding the plate between the dash and metal frame (see figure 7). Reinstall screw.
7. Run RCA cables from the adapter to the switch plate under the dash. (figure 8).
8. Locate the radio antenna cable connection that runs in front of the fuse panel, and pull the plugs apart. Connect cables from adapter (see figure 9).
9. Take note where the frequency switches are set. The adapter is preset to 88.5 when shipped. There is no need to change the adapter frequency unless you are getting interference. [ see chart on back of adapter for freq settings ]
10. Set the number one preset on your FM radio to the frequency 88.5 or whatever frequency you set the adapter to.
11. You are now ready to plug in your music device and test the system for proper operation.
12. To play your music device, attach a cable from the headphone jack to the switch plate jack (figure 10). Set your FM radio to either 88.5 or whatever frequency you set the adapter to. Make this one of your FM pre-sets. You will need to set the volume control on your music device about 3/4 of the way up to start. After the system is working adjust the volume on your music device as loud as you can make it before you hear distortion. This will give you the best sound quality.
13. To listen to regular FM again go to any other pre set station.
14. Use the extra tie straps supplied, to "neaten" up the wires, then install glove box.

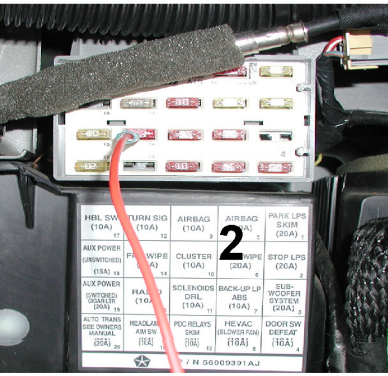

ANY COMMENTS OR QUESTIONS ? CALL BOB 610

358 1886