
RANGE with Blinkers INSTALLATION GUIDE & DIAGRAM

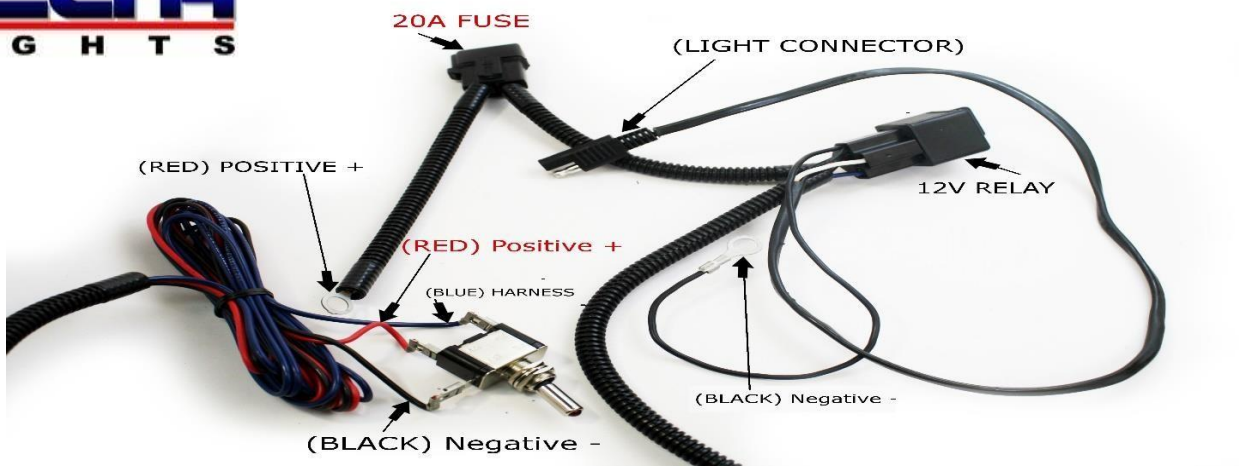

Switch installation:

1. Find the best location where the switch will be installed, we recommend near the center of dashboard.
2. Drill a ¾" hole to place the switch.

Wiring: Connect 3 wires from harness to switch as follows:

1. (Red wire) connects to ⊕ icon. 2. (Black) Wire connects to ⏚ icon. 3. (Blue Wire) connects to ≡D icon.


Then lock the switch in place where the ¾" was drilled. **The switch installation is now complete.**

***Use the supplied quick connecter to splice the remaining wires in with the hot wires for turn signals.

Installing power source: After installing the switch inside of the vehicle, there will be (3) additional cables that will need to be connected to a power source:

1. **Positive + (Red) cable circular end connects to the positive + post on battery.**
2. **Negative - (Black) cable circular end connects to the negative – post on battery.**
3. **Light Connector cable connects to light bar.**

Turn ignition on, then turn the switch to the ON position. Installation is now complete

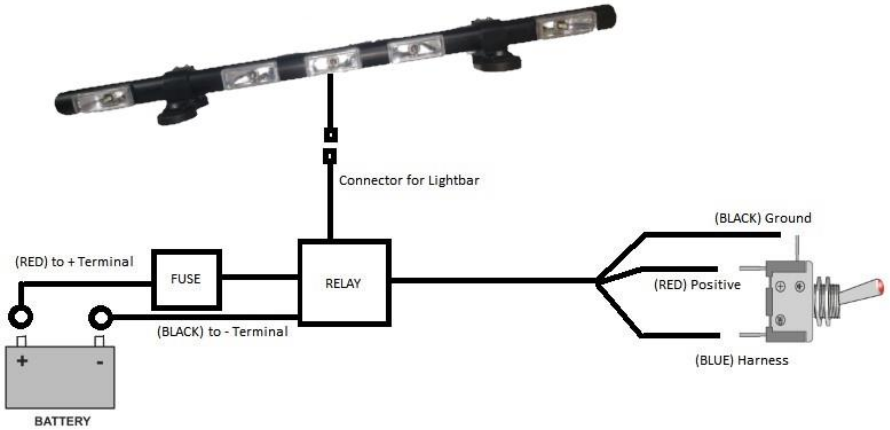

DELTA TECH INDUSTRIES - ONTARIO, CA 91761 U.S.A.
Web: www.deltalights.com E-mail: tech@deltalights.com