

## Rocker guards for JK Wranglers

### **Part numbers that begin with 221.**

Protect the rockers on your 2007 Jeep Wrangler with these super-strong rock rails that mount directly to the body. Installation is easy since no drilling is required and they install using existing holes. You may wish to purchase XYZ-gasket to protect the paint under the rocker guards. XYZ-gasket is sold separately.

**For assistance please call**  
**800-777-0878**



### **Hardware list:**

#### **221-16X**

5/16" X 1" hex head bolt (4)  
5/16" Flatwasher (4)  
5/16" Nyloc nut (4)

### **Parts list:**

Rocker guards L&R  
Door mount (4)


#### **221-17X**

5/16" X 1" hex head bolt (24)  
5/16" Flatwasher (24)  
5/16" Nyloc nut (12)

Rocker guards L&R  
Door mount (6)

**Note: Do not tighten hardware until instructed to do so.**

Step 1. Remove OEM

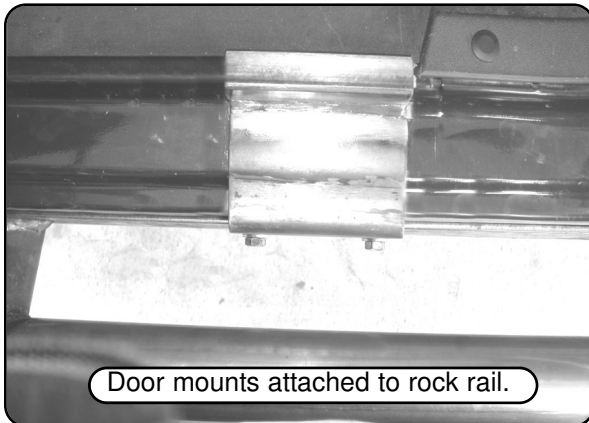

Door mounts attached to rock rail.


rocker guards.

**Note:** If you purchased The body protectors you will install them before securing the rocker guards to your jeep.


Step 2. Place door mount brackets onto the door sills.

Step 3. Loosely attach the rocker guards by placing them onto the studs that are on the door mount brackets. Secure the rock rails to the door mounts using 5/16" bolts with 5/16" flat washers. You may want to use some loctite on these bolts. Secure rocker guards to the jeeps pinch seam using 5/16" hardware. Do this by installing a bolt thru the rocker guard, thru the body then install a flat washer and secure with 5/16" nylock nut. **Do not tighten these bolts till all of them are in place. Torque these bolts to 20 ft/lbs.**

Step 4. Periodically re-tighten all hardware.

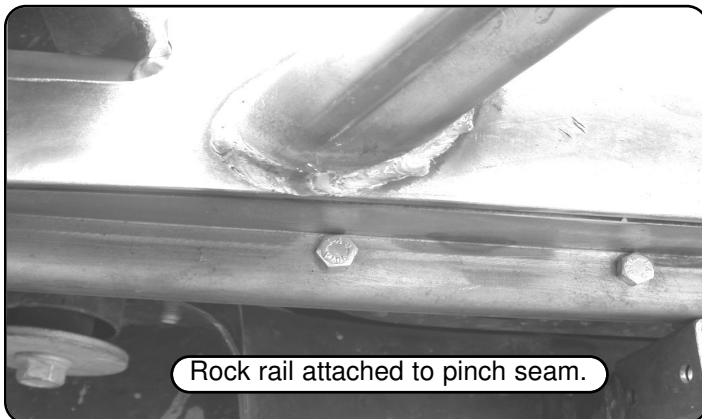

Rock rail attached to pinch seam.

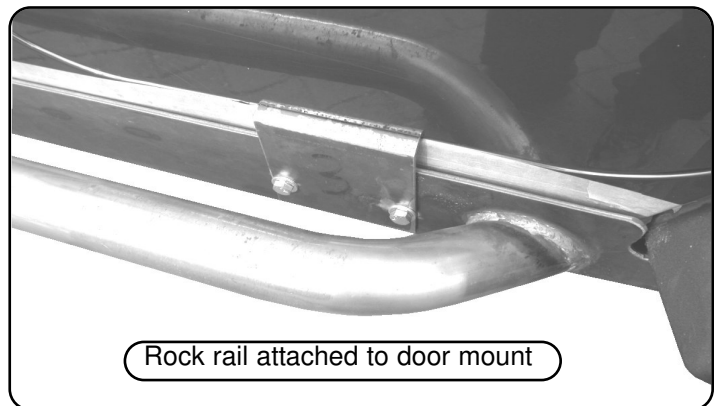

Rock rail attached to door mount