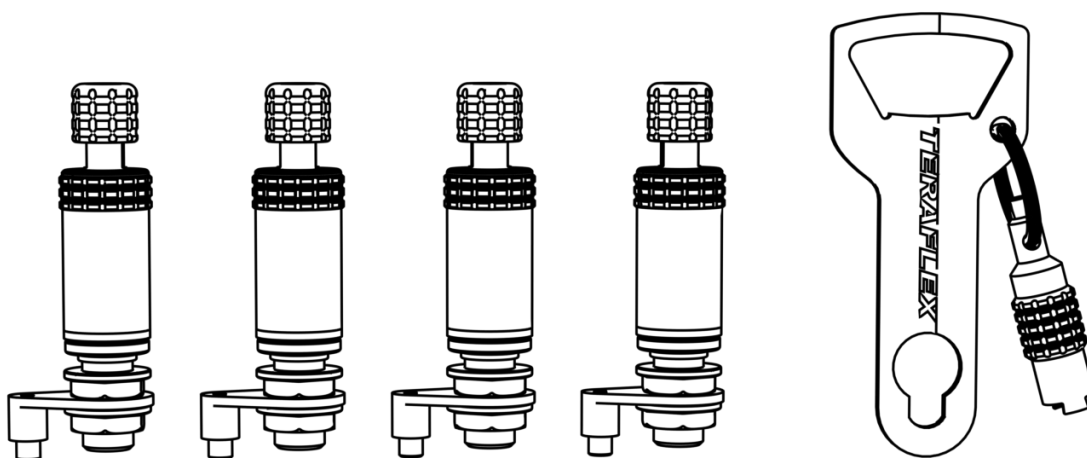




Universal Tire Deflator

www.TERAFLEX.com

1056600



Important Notes:

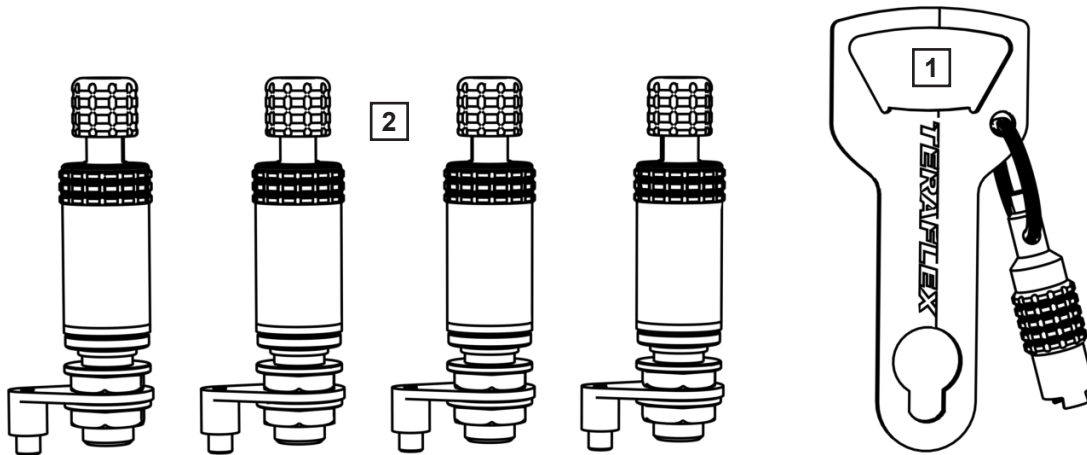
Prior to beginning this install, read the instructions thoroughly to familiarize yourself with the required steps. Evaluate if you are experienced and capable to personally perform these modifications. A factory service manual should be used in conjunction with these installation instructions.

Refer to the parts list to ensure that all necessary components and hardware has been included. If any parts are missing please contact your local TeraFlex dealer for assistance.

When reinstalling OEM hardware, refer to the torque specs given in the Factory Service Manual.

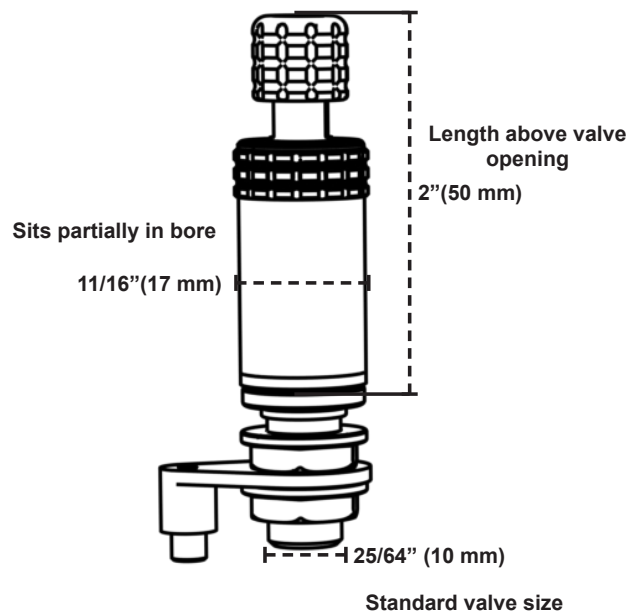
Tools Needed:

- Metric Tools



Number	Part #	Name	Qty.
1	29-01-010-010	Wheel (S), Tire Deflator, Universal Tire Deflator, Tool Assembly	1
2	29-01-010-100	Wheel (S), Tire Deflator, Universal Tire Deflator Assembly	4

VERIFY FITMENT BEFORE INSTALLING

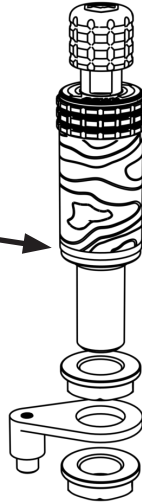
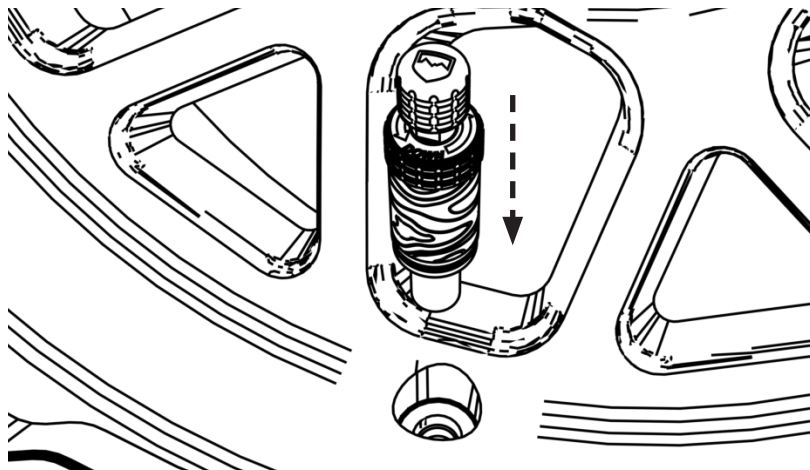


Designed for universal fitment, however, depending on the bore placement and backspacing, the valve stem may protrude past the rim of the wheel.

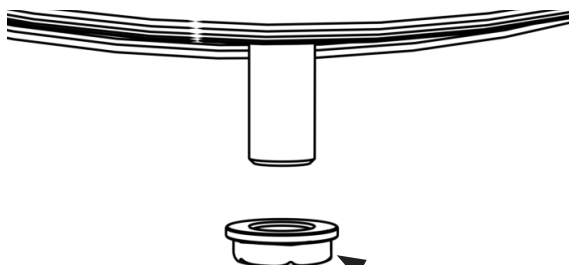
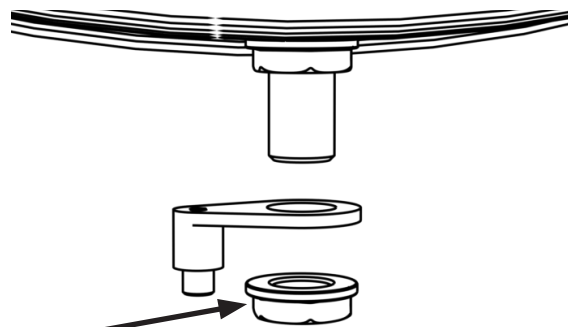
Max bore depth = 1"

REMOVE NUTS AND TPMS BRACKET FROM THE DEFLATOR

Leave grommet installed
on the deflator.

**1****INSERT INTO WHEEL VALVE OPENING****2**

Designed to fit on any wheel. Check fitment before installing.
Be aware that the top of the valve will stick out further than a standard valve.

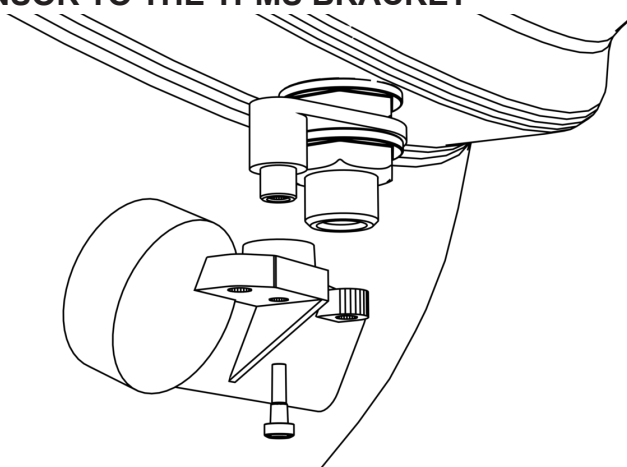
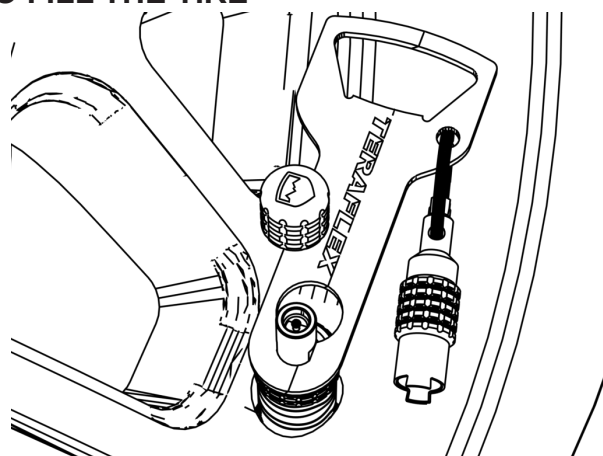
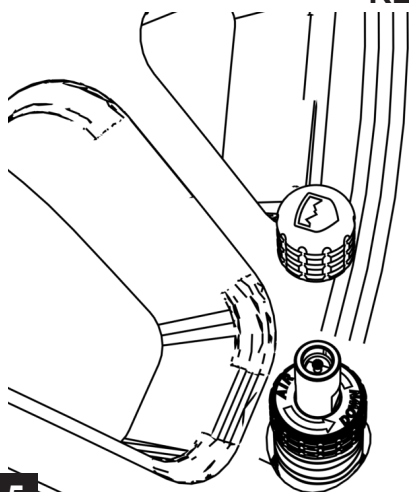
INSTALL GROMMIT AND FIRST NUT**INSTALL TPMS BRACKET AND SECOND NUT**

14 mm
Torque: 25 - 45 in. lbs.

3

ATTACH THE SENSOR TO THE TPMS BRACKET

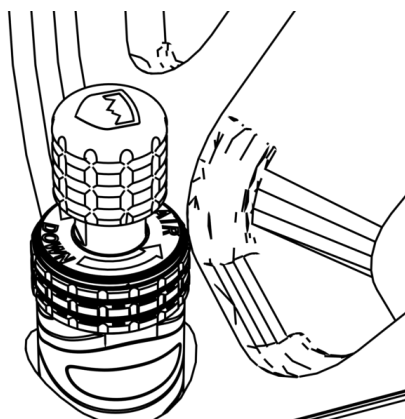
Install the tire onto the wheel.
Place the TPMS sensor as close to the wheel as possible.
Some factory TPMS sensors may not fit with the provided bracket.

**4****REMOVE THE CAP TO FILL THE TIRE**

Use provided tool (or 7 mm) to help remove the cap as needed.

5**LOOSEN THE AIR DOWN COVER TO AIR DOWN BY TURNING COUNTER-CLOCKWISE**

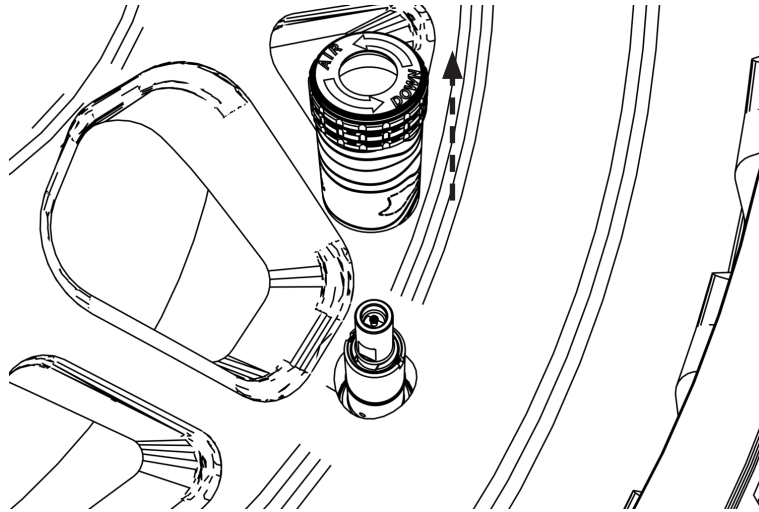
Deflator valve will close when pre-set tire pressure is reached.

**6**

RETIGHTEN AIR DOWN COVER WHEN AIR DOWN IS COMPLETE

ADJUSTING THE PRESSURE LEVEL

REMOVE CAP AND AIR DOWN COVER



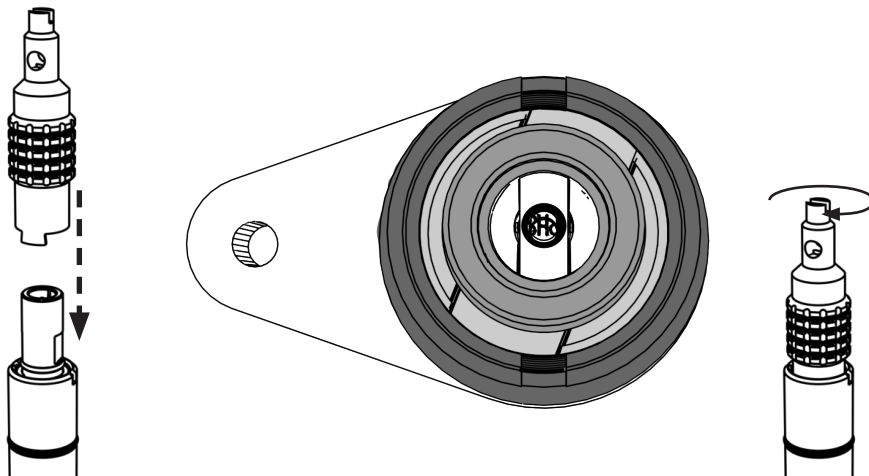
7

INSERT AIR DOWN TOOL SO IT CATCHES GROOVES

TURN CLOCKWISE TO RAISE SHUTOFF PRESSURE

TURN COUNTER-CLOCKWISE TO LOWER SHUTOFF PRESSURE

PRESSURE RANGE: 8-28 PSI



To set pressure it is recommended that you tighten or loosen adjuster all the way, fill air into the tire until deflator valve starts releasing air, and then adjust one turn at a time. Check tire pressure in between each turn until the desired tire pressure is reached. (Add air after each turn if starting from lowest setting.)

1 turn = about 2-3 psi

Allow the deflator valve to close before checking air pressure.

Reinstall the air down cover, refill the tire to at least 30 PSI and then loosen the deflator cover again to double check that the desired pressure setting is correct.

8

Deflators come preset to their lowest pressure setting.

TERAFLEX

PRODUCT INFORMATION

MAINTENANCE INFORMATION:

It is the buyer's responsibility to have all suspension, drivetrain, steering, and other components checked for proper tightness and torque after the first 100 miles and every 3000 miles after that.

NOTICE TO INSTALLER:

The enclosed "Warning to Driver" sticker must be installed in the vehicle in driver's view. This sticker is to act as a constant safety reminder when operating the vehicle. It is your responsibility as the equipment installer to install the provided sticker and to forward the product instructions to the vehicle's owner for review. If a "Warning to Driver" sticker or product installation guide were not included in the kit, FREE replacement stickers and instructions are available by request. It is the installer's duty to ensure a safe and controllable vehicle after the modifications have been performed.

WARNING:

Neither the seller nor the manufacturer will be liable for any loss, damage, or injury directly or indirectly arising from the use of or inability to determine the use of these products. Before using, the user shall determine the suitability of the products for its intended use, and the user shall assume all responsibility and risk in connection therewith.

WARNING TO DRIVER:

This vehicle has been modified to enhance off road performance and has unique handling characteristics. Use in harsh environments can cause extreme stress on the components. Vehicle should be inspected after being off road to make sure that all the components are in working order and safe to travel on the highway. All fasteners should be checked so that they are at the correct torque specifications as the vibration and stresses from off roading may cause critical fasteners to work loose. Extra care should be taken to inspect the critical components, steering, and brake systems. During each oil change components such as arms, tie rod ends, etc should be greased and checked for excessive wear. Any worn components should be replaced. When returning to the pavement always set or restore tire air pressure to the factory recommendation and connect or engage any disabled sway bar mechanisms. Because of the higher center of gravity and larger tires, this vehicle handles and reacts differently than many passenger cars, both on and off road. You must drive it safely! Extreme care should be taken to prevent vehicle rollover or loss of control, which can result in serious injury or death. Avoid sudden sharp turns or abrupt maneuvers. Generally, braking performance and capabilities are decreased when significantly larger/heavier tires are used, especially when used in combination with transfer case low-range reduction kits. Take this into consideration while driving. Do not add, alter or fabricate any factory or aftermarket parts to increase vehicle height over the intended height of the TeraFlex product purchased. Mixing component brand is not recommended. TeraFlex Inc. will not be responsible for any altered product or any improper installation or use of our products. We will be happy to answer any questions concerning the design, function, and correct use of our products. It is ultimately the buyer's responsibility to have all bolts/nuts checked for tightness after the first 100 miles and then every 3000 miles. Wheel alignment, steering system, suspension and drive line systems must be inspected by a qualified professional mechanic at least every 3000 miles.

TERAFLEX PRODUCT WARRANTY:

TeraFlex Inc. warrants TeraFlex Suspension products to the original retail purchaser to be free of defects in material and workmanship for as long as the original purchaser owns the vehicle on which products were originally installed.

Failure to complete regular maintenance (grease every 3000 miles) on TeraFlex FlexArms will void this warranty. All other conditions of the standard TeraFlex product warranty apply.

All TeraLow products are covered by the TeraFlex two (2) year warranty to be free of defects in material and workmanship for two years from date purchased.

TeraFlex axles are covered by a 12-month warranty to be free of defects in materials and workmanship.

This warranty does not cover or include product finish, improperly installed or applied products, improperly maintained products, products or components used for racing or competition or damage due to abuse or neglect, products that fail due to the use of larger tire and wheel combinations.

All returns must be accompanied by an original invoice. It is the customer's responsibility to remove the product from the vehicle. Shipping charges are the responsibility of the customer. TeraFlex Inc. will pay the return freight if the product meets the terms of warranty.

This warranty is for the replacement or repair of defective TeraFlex products only and does not include freight charges, labor charges for removal of or installation of TeraFlex or related products or components, costs incurred due to down time of the vehicle, or lost profits due to vehicle down time.

A returned goods authorization number (RGA#) must accompany any returned products. For more information please contact a TeraFlex customer service representative.

COPYRIGHT

©Copyright 2014. All rights reserved, TeraFlex Inc. Reproduction of this catalog and/or any of its contents without written permission is strictly prohibited.

TeraFlex® is a registered trademark of TeraFlex Inc. All trade names and logos including but not limited to TeraFlex, FlexArms, RockGuard, Monster, and LCG are protected by law and duplication of trade names and/or logos are strictly prohibited.

TeraFlex Inc. reserves the right to update, discontinue, redesign, modify finish, part number or component build parts if deemed necessary without written notice. TeraFlex Inc., and any associated dealers are not responsible for misprints or typographical errors that may have inadvertently been made within this instruction sheet.

Jeep® and the Jeep® grill are registered trademarks of Fiat Chrysler Automobiles N.V., and have no affiliation with TeraFlex Inc.

TERAFLEX, Inc.
5680 West Dannon Way
West Jordan, UT. 84081
Phone/801.713.3314
Fax/801.713.2313
www.teraflex.com