




ARMORLITE®

INSTALLATION INSTRUCTIONS

Armorlite® Seatback Covers

Vehicle Application
Jeep® Wrangler JK 4-Door

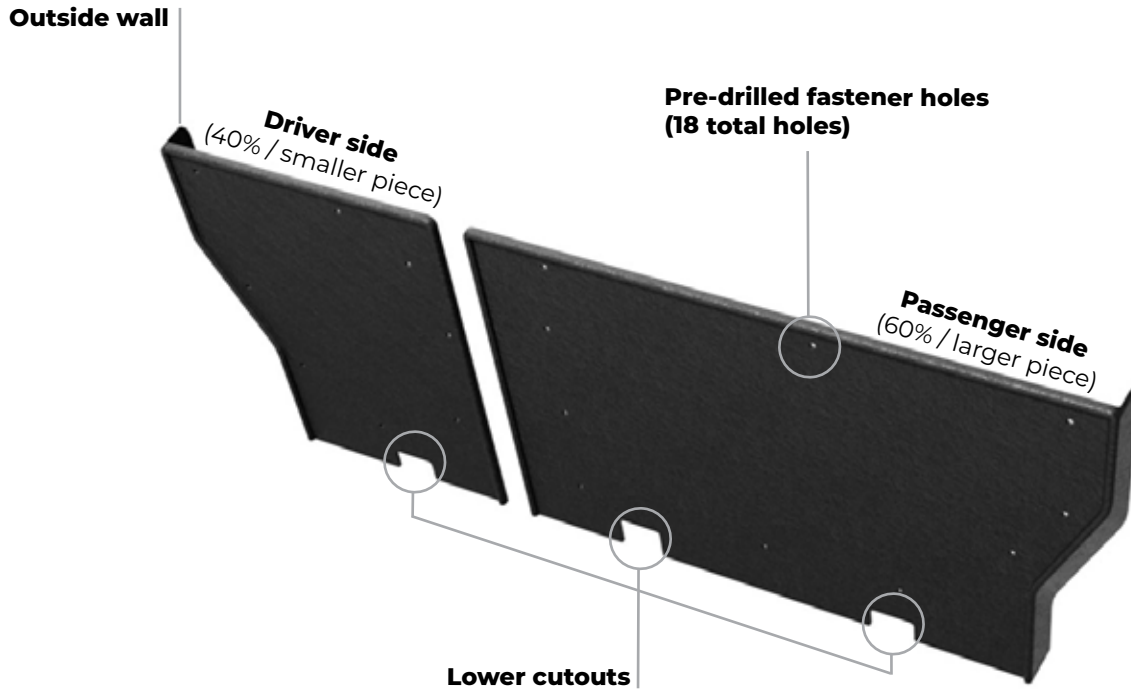



CAUTION

READ BEFORE INSTALLING

- Armorlite seatback covers to be installed over existing factory seatback material. **DO NOT attempt to remove factory seat covers.**
- Install Armorlite seatback covers by carefully following the steps as illustrated in enclosed instructions or visit www.GoArmorlite.com/installation for installation video.
- If seatbacks are removed for cleaning, follow the installation instructions when reinstalling to ensure proper fit.
- Armorlite flooring, cargo and seatback products are engineered and designed to fit the vehicle make and model you purchased.
- **DO NOT INSTALL** in any other vehicle make or model.
- Warnings label and instructions should be kept with the owner's manual of your vehicle.

BEFORE YOU BEGIN INSTALLATION



Wear gloves to protect your hands from any sharp edges in and around the seats.



Ensure the car is in "Park," and the emergency brake is applied.

TOOLS REQUIRED

- Drill/Driver
- 1/8" drill bit
- Phillips screwdriver
- Self Tapping Screws (provided in kit)

VISIT www.GoArmorlite.com/installation FOR A DETAILED INSTRUCTIONAL VIDEO.

Note: Step numbers in the video may not match printed instructions.

1

Horizontally fold down the driver side back seat. To assure proper alignment you will need to position yourself in the rear-cargo area. Make sure you can clearly see the pre-drilled fastener holes of the Armorlite seatback - a bird's eye view is recommended.



2

Take the driver side Armorlite seatback cover (40% / smaller piece) and place the left outside wall over the back seat so it is flushed with the side cushion of the seat.



3

The Armorlite pre-drilled fastener holes need to align over the internal metal frame found at the top of the back seat. Holes will be drilled directly into the seat frame.



4

Align top horizontal edge of the Armorlite seat back cover with the factory fabric seam that runs along the top of the seatback. Also, align the lower cutout with the bottom seat bracket. Leave an evenly spaced gap around the bracket.



5

Pre-drill all holes through the existing holes in the Armorlite seatback cover using a 1/8" drill bit. Leave the seatback cover in position and drive screws by hand with provided fastener screws. **IMPORTANT:** do not use a larger sized drill bit. This could cause screws to not fit properly and come out over time.



6

Raise the driver side back seat to normal position and follow the same steps for the passenger side back seat. The alignment process will be mirrored to the driver side.

LIMITED LIFETIME WARRANTY

Armorlite flooring products are backed by a limited lifetime warranty for materials and workmanship, which means that our products are guaranteed not to break, tear, or deform under normal use. This limited warranty only applies when the product is correctly installed and used in the type of vehicle listed in the product description.

LENGTH OF WARRANTY

The warranty will remain in effect while the original purchaser of the Armorlite product owns the vehicle in which the product is installed. The warranty is not transferrable, which means that the warranty will terminate if you sell or otherwise give the product to someone else.

WHAT THIS WARRANTY DOES NOT COVER

Certain common sense damages to the product are NOT covered by this limited lifetime warranty:

- intentional damage;
- damage resulting from an accident;
- unreasonable use or neglect;
- improper service, installation, or removal;
- damage resulting from product modifications;
- damage to product prior to installation; and
- damage, fading or discoloration from excessive wear and tear and/or excessive exposure.

HOW TO MAKE A WARRANTY CLAIM

If you have a valid warranty claim, you must follow the warranty return instructions in the "Warranty Process" section below.

HOW STATE LAW APPLIES

Armorlite's express warranties are limited to those expressly stated in this agreement. Armorlite makes no other express representations or warranties, express or implied, regarding the products, including regarding merchantability, suitability, originality, or fitness for a particular purpose, and any such warranties are expressly disclaimed. Any implied warranties, including without limitation the implied warranties of merchantability and fitness for a particular purpose, shall be limited to the duration of this limited warranty.

In no event will Armorlite be liable, whether in contract or tort (including negligence) for damages in excess of the purchase price of the product, or for any indirect, incidental, special or consequential damages of any kind, or otherwise to the fullest extent these damages may be disclaimed by law.

Some jurisdictions do not allow the limitation or exclusion of incidental or consequential damages, or a limitation on the length of an implied warranty, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from one jurisdiction to another.

WARRANTY PROCESS

Visit our support page and fill out the form to submit a warranty claim. You will be required to upload images to demonstrate proof of a manufacturing defect. Upon receiving your claim an investigation will occur and may take up to 4-8 business days to be completed.

If the warranty claim is approved, you will be provided with a replacement product. If your product model has been discontinued, you will be provided with another product of similar composition and price. Armorlite will ship your replacement product at no cost.

SHIPPING

You may be required to return product(s) for a more thorough investigation.

A Return Merchandise Authorization Number (RMA#) will be provided at this time. Armorlite will cover return shipping costs and provide you with a pre-paid shipping label. Please write the RMA# on the outside of the box. The product must be cleaned and returned to its original box or equivalent packaging. Packaging must be in good condition. Armorlite is not responsible for lost or damaged packages.

All products must be shipped to:

Armorlite, Inc. - Warranty
1506 East Main Street
P. O. Box: 669
Old Fort, NC 28762