



*Truck and Jeep Accessories*

[www.Daystarweb.com](http://www.Daystarweb.com)  
 Tech Support Contact Info  
[Tech@DaystarWeb.com](mailto:Tech@DaystarWeb.com)  
 Phone: 623.907.0081  
 Fax: 623.907.0088  
 841 South 71<sup>st</sup> Avenue  
 Phoenix, AZ 85043

## KJ71060BK

### 2007 - 2018 Jeep Wrangler JK Radio Mount Kit



Bill of Materials		
Part Number	Description	Quantity
M56281-BK	JK Radio Mount Switch Panel	1
RM25R-U/V	Dual Band Radio, 25W	1
DB-RM	Dual Band Radio Antenna	1
NMO-MT-U	Antenna Mount	1
KU80011	Rocker Switch, 20 A, Blue	1
KU80012	Rocker Switch, 20 A, Green	1
KU80013	Rocker Switch, 20 A, Amber	1
KU80014	Rocker Switch, 20 A, Red	1
BU71060	Hardware	1

Required Tools
Trim Removal Tools
Metric Tool Set
Screwdriver Set
Drill
Drill Bit Set

Instructions Sheet INS71060  
 2018 Daystar Products International  
 Version: 00

**Pre-Install Procedure**

1. Remove roof panels
  - a. Disengage locks and remove each panel





## Installation

2. Locate desired position of radio mount on upper dash panel
  - a. Recommend positioning at the center, above the rear view mirror, between the driver and passenger visors



3. Firmly press mount against upper dash panel and mark location of holes

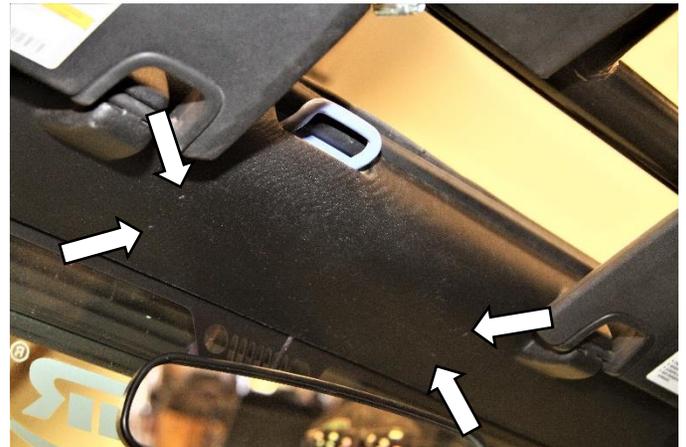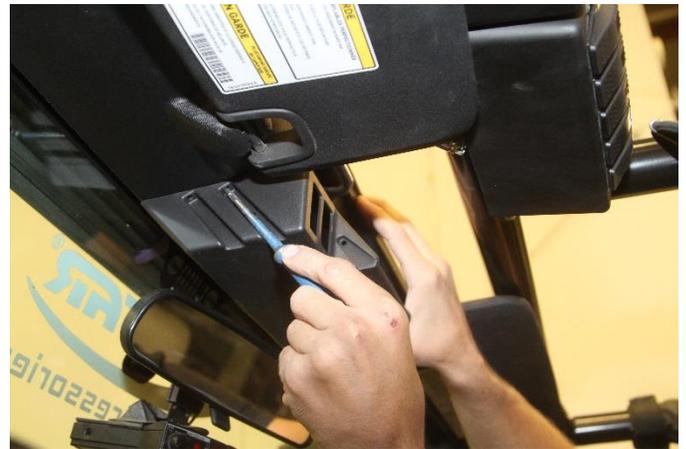



4. Remove upper dash panel





5. Bore out holes with an adequate drill and bit  
a. Verify supplied screws fit and securely hold mount to upper dash panel



6. Install radio into corresponding hole on radio mount  
a. Insert radio and fasten using supplied hardware

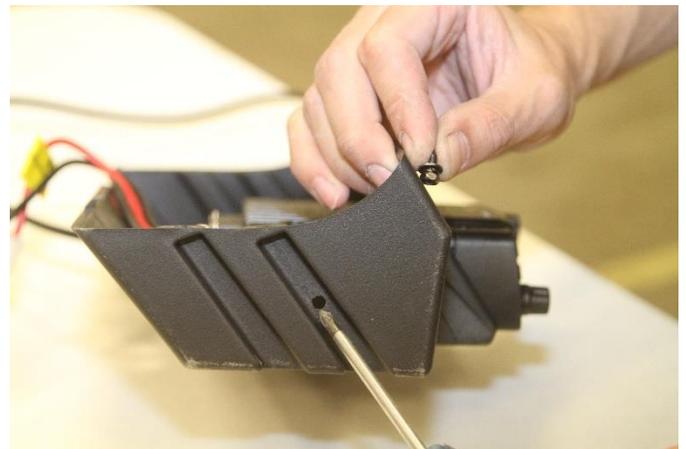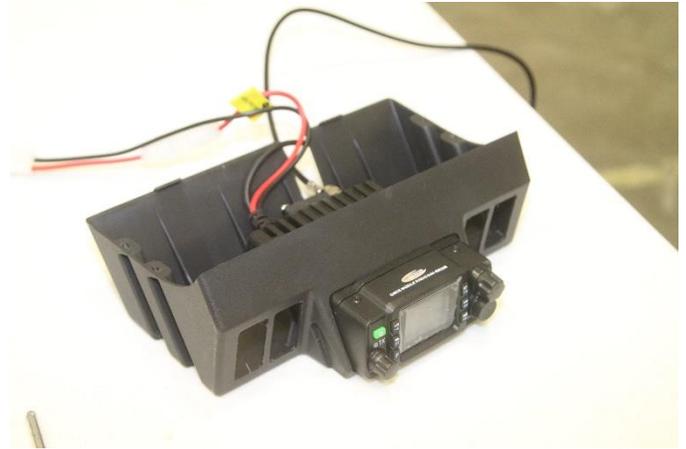

7. Install rocker switches into corresponding holes on radio mount
  - a. Slide each switch in until they lock into place

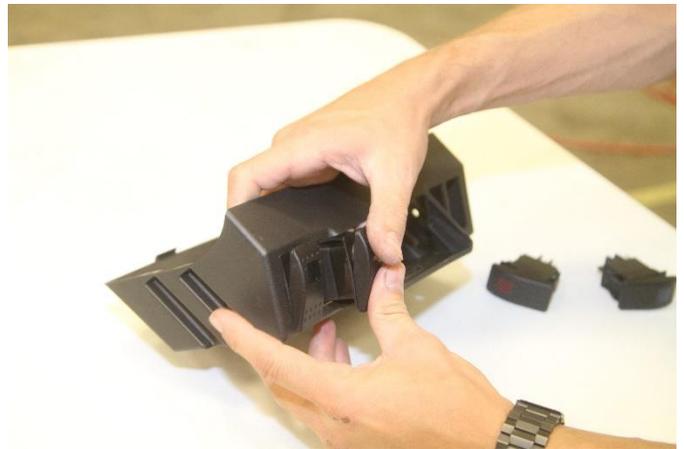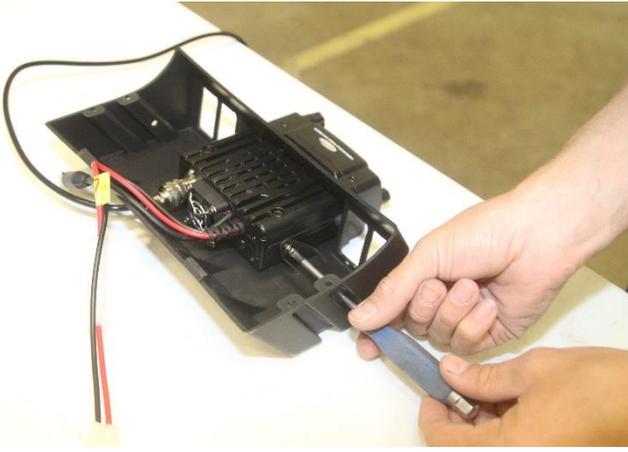

8. Assemble antenna mount bracket



9. Install antenna mount bracket onto driver side window frame



10. Install radio antenna



11. Run antenna cable along door jam and behind dash panels



12. Install radio electrical wiring

- a. Run positive from positive battery terminal
- b. Ground negative to the body of the vehicle




13. Reinstall upper dash panel

- a. Leave cables hanging out behind upper dash panel



14. Connect cables and wiring to corresponding connectors behind radio

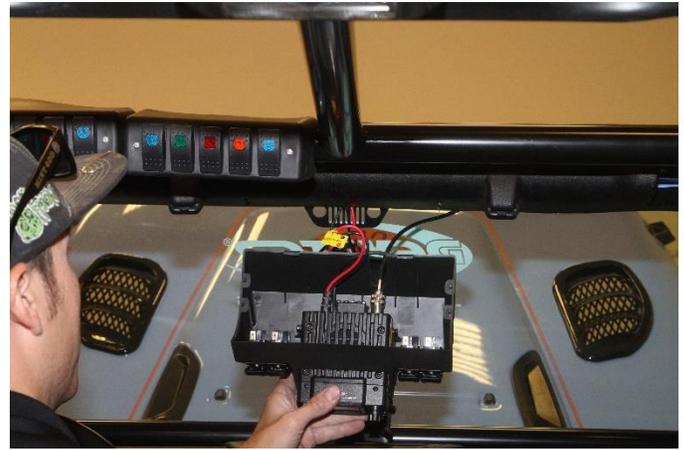

15. Install radio mount


- a. Tuck cables behind radio mount
- b. Align radio mount and upper dash panel holes, and fasten using supplied screws




16. Locate desired position of microphone mount
- a. In this case, the driver side visor was used



17. Firmly press mount against surface and bore out holes with a drill and bit
- a. Be sure not to drill all the way through the visor, if that is the desired position of the microphone mount
  - b. Verify supplied screws fit and securely hold mount to surface

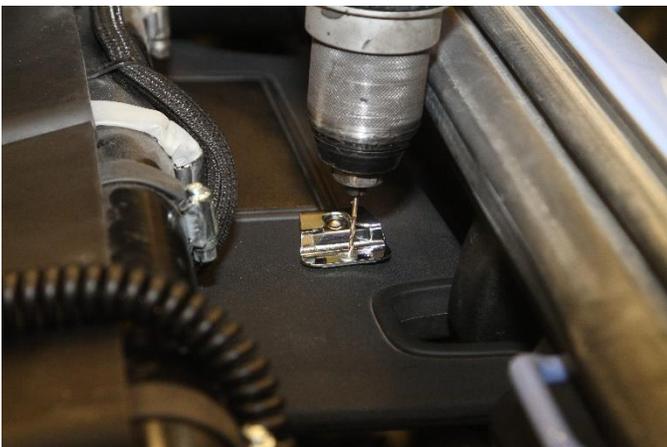

18. Insert microphone onto holder

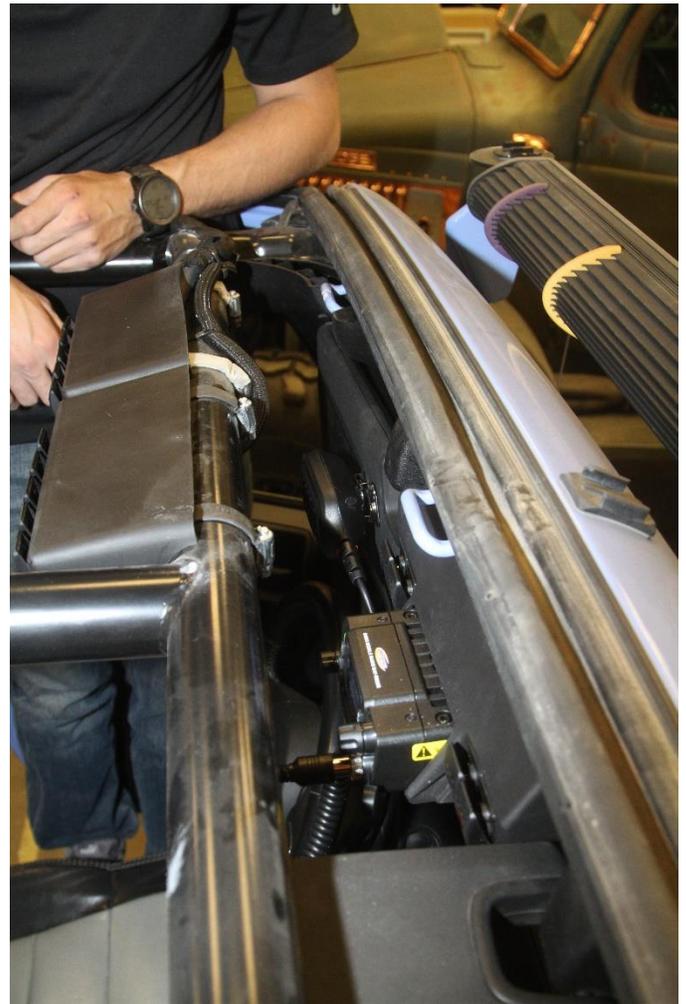

19. Install complete



**Post Installation**

20. Check all fasteners to ensure they are tightened to proper specifications.
21. Ensure all wires, hoses, cables, etc. are properly connected and there is ample slack.

**Thank you for choosing Daystar Products**

Daystar recommends a certified technician install this system. In addition to these instructions, professional knowledge of disassemble/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating of the vehicle.

Please read all the instructions before beginning the installation. Check the kit hardware against the parts list. Be sure you have all the needed parts and understand where they go. If anything is missing, do not proceed with the installation, Call Daystar Products to obtain needed items.



**ESTABLISHED IN 1977**

