



Jeep® TJ Wrangler Front Seat Flashlight Mount



REQUIRED TOOLS

13MM Socket
Torque Wrench

KIT CONTAINS

Flashlight mount

QTY

1

1. REMOVE SEAT BOLTS

Locate the two front-most seat bolts on either the driver or passenger side.



Remove them with a 13MM Socket.




2. INSTALL FLASHLIGHT MOUNT

Place the mount over the bolt holes.



Secure it by replacing the seat bolts with a torque of 35 ft-lbs.

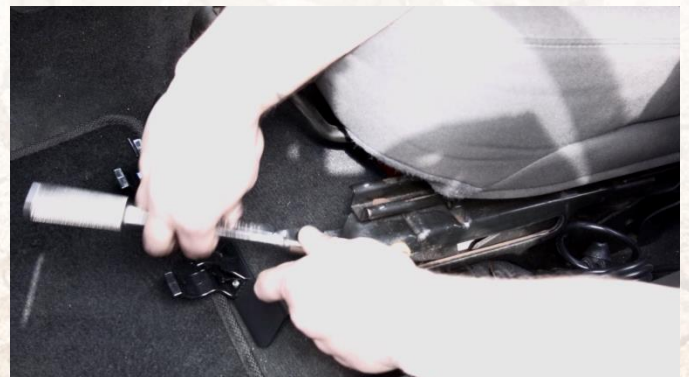



**Jeep® TJ Wrangler
Front Seat Flashlight Mount**

3. INSTALL FLASHLIGHT

Secure your flashlight of choice into the brackets. It will fit any D-cell battery light.



ENJOY YOUR NEW TJ FLASHLIGHT MOUNT!