



# INSTALLATION INSTRUCTIONS

**Part# 69-0717**

**AIR IT UP® 4 Tire On Board Installed Air Delivery System  
with Rear Mounted Controller (Requires External Air Source)**



For the most up-to-date instructions please visit [www.UpDownAir.com](http://www.UpDownAir.com)

***Air It Up!***



PLEASE TAKE A MINUTE TO READ THIS ENTIRE INSTRUCTION MANUAL BEFORE YOU START.  
WE WANT YOU TO HAVE A FUN AND EASY INSTALLATION WITHOUT HURTING YOURSELF OR YOUR JEEP.

**SAFETY PRECAUTIONS**

If you are working on the ground always use jack stands and chalk any tires touching the ground. Wear safety glasses and gloves as you will be using power tools for this installation. We recommend disconnecting the battery any time you are working on your Jeep.

**FOR BEST RESULTS ALL 4 TIRES NEED TO BE CONNECTED**

**NEVER DRIVE WITH THE WHIPS CONNECTED TO YOUR JEEP. MAJOR DAMAGE CAN OCCUR.**

**IF YOUR NEW UpDownAir PRODUCT HAS DAMAGED OR IS MISSING PARTS  
PLEASE CONTACT UpDownAir CUSTOMER SERVICE DIRECTLY AT :**

**833-226-4863 option 4 or info@UpDownAir.com**

**TOOLS NEEDED**

- Cordless Drill
- 5/16" Drill Bit
- Thread Sealer (*Loctite 577—We do not recommend using Teflon tape*)
- Spray Bottle with Mild Soapy Water
- Phillips Head #2 Screw Driver
- Tube Cuter or Sharp Utility Knife

**WRENCHES**

- Crescent
- 22mm, 18mm
- 16mm, 14mm
- 13mm , 10mm
- 8mm , 1/4" Allen


**1/4" Drive**

- Ratchet
- 13mm Deep Socket
- 10mm Socket
- 8mm Socket
- 1/4" Allen Socket

## Secure Jeep and Prep for Installation

This entire install can be done on the ground but jack stands or a lift will make it even easier.

1. Park your Jeep and set the parking brake.
2. Place a blanket on the edge of the roof and windshield of your Jeep and open hood the hood all the way.
3. Disconnect the negative (-) battery terminal.
4. Begin installation step 1

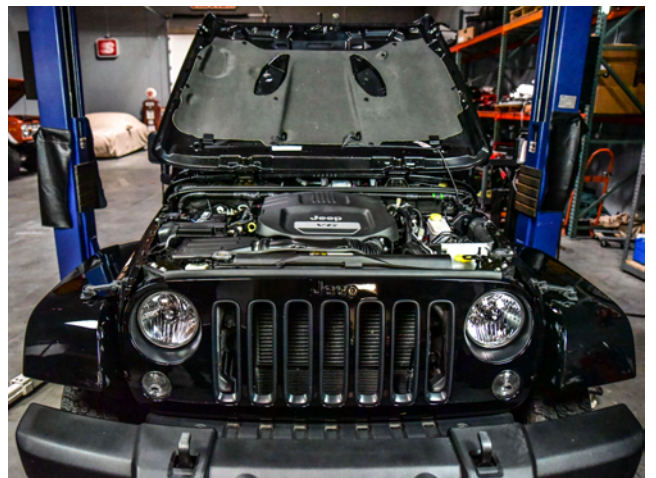




**Always:**

Use a tube cutter or sharp utility knife.


**Do Not:**

Fold or kink the Air Line Tube. Cut the Air Line Tube at an angle. Do not use pliers, scissors, snips, saws, or side cutters.


**PROPER AND IMPROPER CUTS IN THE AIR LINE TUBE**

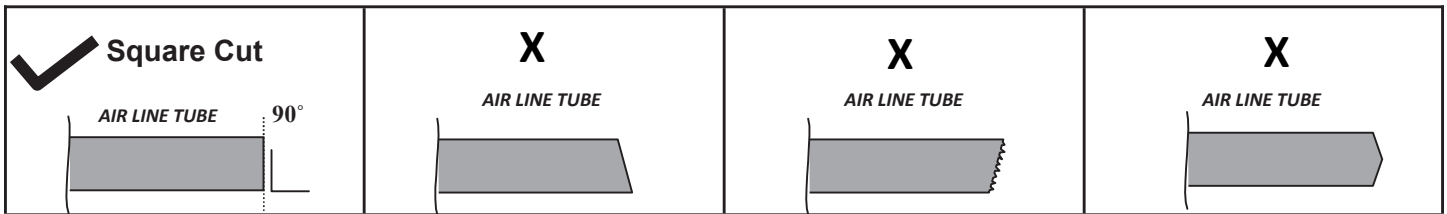


Insert end of Air Line Tube into Air Fitting.

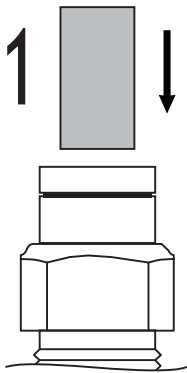


Push Air Line Tube into Air Fitting as far as possible.

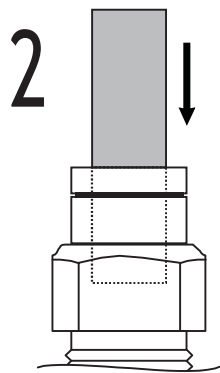

Gently pull on the Air Line Tube to check for a secure fit.

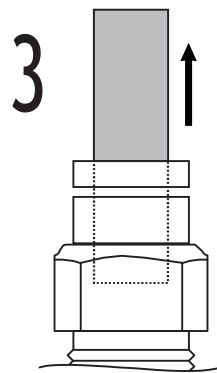

To remove, push down collar and gently pull Air Line Tube away.



**Removal Tip:** Use a small open-ended wrench to push the collar down .

**Always:**

Select routes protected from heat, debris, and sharp edges. Use Nylon Ties to secure the Air Line Tube.

**Do Not:**

Bend or sharply curve Air Line Tubes. Leave Air Line Tube exposed to sharp edges. Use unnecessary lengths of Air Line Tube. Route Air Line Tube near moving parts. Let Air Line tube hang unsecured from vehicle. Scar Air Line Tube while routing.



**69-0717 - Installation BOM**

<b>PART#</b>	<b>QTY</b>	<b>DESCRIPTION</b>
01-100	8	Quick Release Chucks with Betty Bar
01-109	8	1/4" X 1/4 NPT Male Push to Connect Fitting
02-108-122	4	1/4" Green Air Line 48"- For Tire Whips
69-0717-01	1	Jeep Rear Mount ADS Controller - 80psi
01-101	4	Body Mount Schrader Valve - Push to Connect
05-133	4	1/4" Flat Washer
01-110	2	3/8" X 1/4" Push to Connect "Y"
01-105	1	3/8" Push to Connect "T"
05-115	10	8" Cable Tie
05-117	4	Vinyl Cap
02-100-231	2	1/4 Black Air Line 91" - 1/4" "Y" to Rear Body Mount Schrader Valve
02-103-229	2	1/4 Split Loom 90" - Cover for 02-100-231
02-100-41	2	1/4 Black Air Line 16" - 1/4" "Y" to Front Body Mount Schrader Valve
02-103-39	2	1/4 Split Loom 15" - Cover for 02-100-41
02-102-73	1	3/8" Black Air Line 28"- From Crossover "T" to Driver Side "Y"
02-104-71	1	3/8" Split Loom 27"- Cover for 02-102-73
02-102-43	1	3/8" Black Air Line 17"- From Crossover "T" to ADS Controller "Y"
02-104-41	1	3/8" Split Loom 16"- Cover for 02-102-43
02-102-157	1	3/8" Black Air Line 62"- Firewall Crossover to "T" and Passenger Side "Y"
02-104-155	1	3/8" Split Loom 61"- Cover for 02-102-157
09-102	1	Whip Bag



**If quick connect chucks come pre-assembled please skip to next page**

Using the Bill of Materials identify and lay out all your kit components confirming that you have all the correct parts and quantity.

For our first step we will assemble the Quick Disconnect Chucks for the tire whips. You will need 14mm wrench, 16mm wrench and thread sealer.

1. Apply thread sealer to the 01-109 and screw into 01-100 and stop when hand tight.
2. Once the hand tight continue to tighten for 2-3 full rotations using the wrenches. Repeat for all.
3. Insert the green air line into the each end of Quick Disconnect Chuck . Repeat for all.



01-100

01-109



\* if chucks begin to leak upon connection, remove and switch ends to allow the internal plunger to reset itself.

Our next step is to assemble all the air lines that install in your Jeep. We will start with the 1/4" air line assemblies. Gather all the 1/4" black air line, split loom, Body Mount Schrader Valves and "Y" connectors.

1. Put one 01-101 (Body Mount Schrader Valve) on one end of each air line.
2. Next pull each air line through each split loom.
3. Next insert one long and one short air line assembly into the "Y" connector and repeat. You should now have two "Y" assemblies.



Gather all the 3/8" black air line, split loom, and the "T" connector.

1. Pull each air line through each split loom.
2. Install the 62" and 28" air line into the "T" connector making one long piece
3. Install the 17" air line in the perpendicular port of the "T" connector.




This is where we will be drilling the holes to place the Body Mount Schrader valves on the body of your Jeep. The places we have selected are recommended but are not the only place to mount the Body Mount Schrader valves. We have included a little extra length of air line to allow for alternate mounting spots.

Starting on the passenger's side front wheel well locate a spot on the inner fender well closest to the firewall.

- On 13-up locate in the rectangle recess.
- 07-12 anywhere that the tire will clear under full lock.


Drill a 5/16" hole. Repeat on the driver's side.

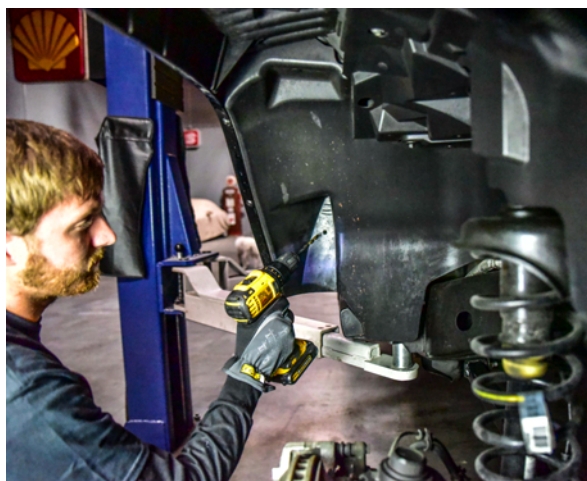

**Mounting option with factory side steps** - Your hole must be located as low as possible on the pinch weld just above the bend.

Starting with the rear of the Jeep locate the spot weld on the passenger's side rear body seam. Drill one 5/16 hole as low a possible.

Repeat on driver's side.

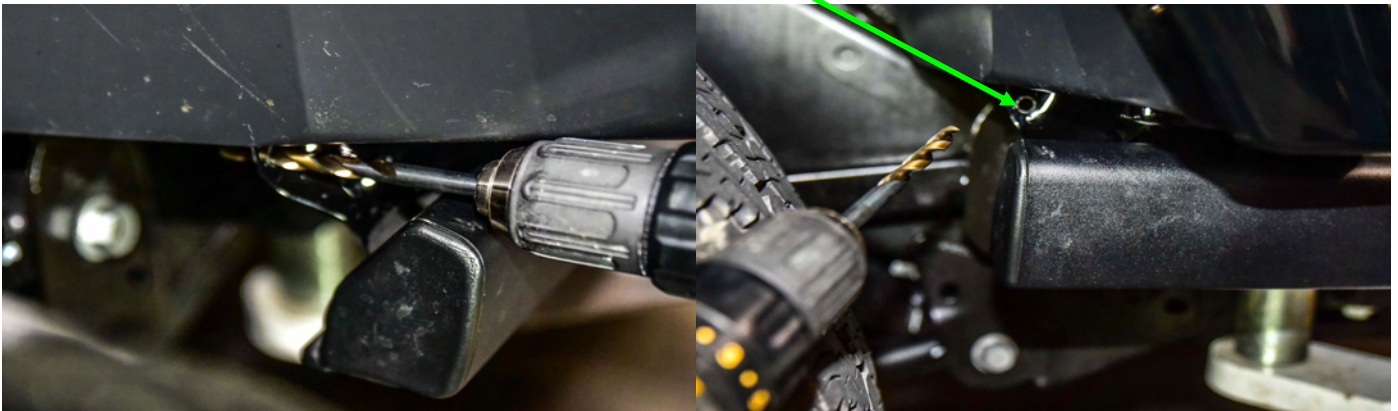

**Mounting option without factory side steps** - Starting with the rear of the Jeep locate the spot weld on the passenger's side rear body seam. Drill one 5/16 hole making sure the leave enough material to hold the Schrader valve.

Repeat on driver's side.






The air lines that you pre-assembled are in four sections:

- (2) 1/4" Front to Rear "Y" sections with Schrader valves attached (91")
- (1) 3/8" Firewall Cross-over with 3/8" "Tee" attached (85"+ 28")
- (1) Cross-over "T" to ADS Control Unit (18")

**First**, lay in the **3/8" firewall cross-over section**. You will want it to follow the factory wiring harness along the top of the rear fire wall. Insert the end without the "T" in the corner gap between the battery and the intersection of the firewall and fender on the passenger side. Next run it all the way over to the driver side placing the end with the "T" in the corner gap between the brake booster and the intersection of the firewall and fender on the driver side. The "T" will end up over the brake booster. **Do not fasten it in place yet.**

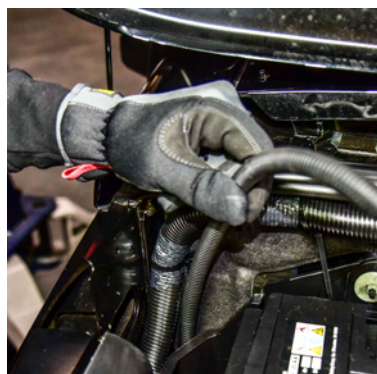

Next we will install the passenger side air line with the body Schrader's attached.

First select one of the **1/4" Front to Rear "Y" sections with Schrader valves attached** and go to the front passenger side and lay the "Y" fitting towards the front of your Jeep. Pull the 3/8" firewall cross-over tube down until it is visible and accessible to the "Y" and connect.



Next install the passenger front Schrader into the 5/16 hole you drilled in the inner fender liner. Install washers and nut and tighten with 13mm socket.



Now take the long air line going to the rear of the passenger side and run it along the top of the frame rail behind the body mounts.





Next install the passenger rear Schrader into the 5/16 hole you drilled in the pinch rail. Install nut and tighten with 13mm socket.



Now you can pull the slack from the firewall cross-over tube back up into the engine compartment. Repeat on the driver side.



Tie Wrap the rear air lines to the harness that runs the length of the frame rail on the top side in three spots.



Install the short 3/8 tube from the center of the "T" and run it under the horn and set it by the abs unit.



For installation of rear mounted controller (69-0717) you will need to re-locate your factory **High note horn** and **OEM relays**. Your first step will be removing the relays mounted on the driver side fender near the firewall

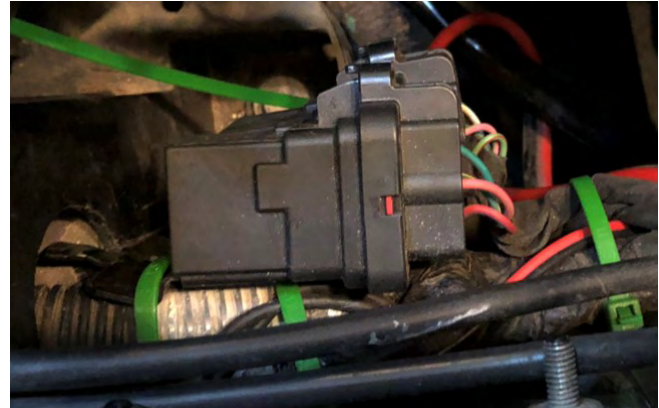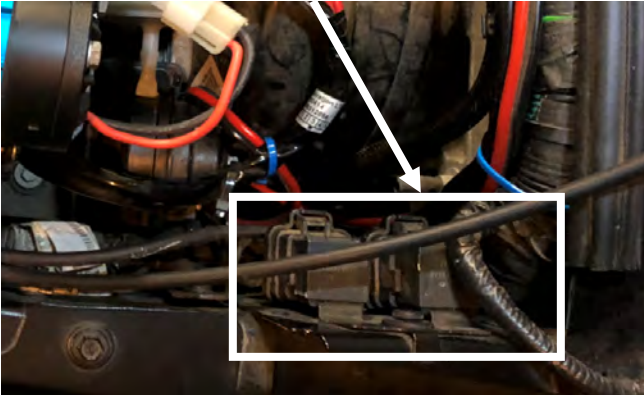


Start by removing the plastic push rivet that holds the 2 relays in place. Once rivet is removed you will move the relays further down and secure to the factory jeep wiring harness with a zip tie so that it is out of the way.

**Horn re-locating-** We can now start relocating the high note horn. Begin by unplugging the horn and removing the bracket that holds the horn (10mm) remove the horn from bracket and attach bracket to the stud next to the brake booster shown in pictures below.

**(your jeep comes with 2 separate horns. Removal of one can be done to avoid the next steps and you will still have functioning horn)**

Before attaching, drill hole in bracket to mount horn.

Use an M8 1.25 nut and lock washer to attach the bracket to the firewall stud.

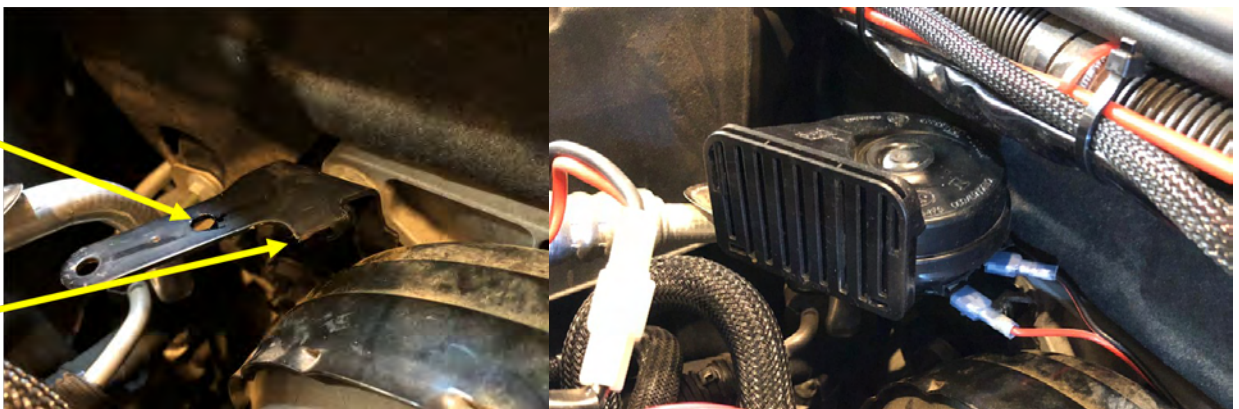


Once bracket is in place you can now attach your horn in the new location. You will need to extend the factory wires or just make a jumper cable to make up for the length change in the new location

Now we will install the Rear Mount ADS Controller into the engine bay. This is a simple bolt in operation. You will need a 10mm wrench or socket.

Remove the rear most fender and ABS mount bolts using a 10mm wrench.



Connect the 3/8 air line from the firewall cross-over to the ADS Controller. You may need to trim for the best fit.

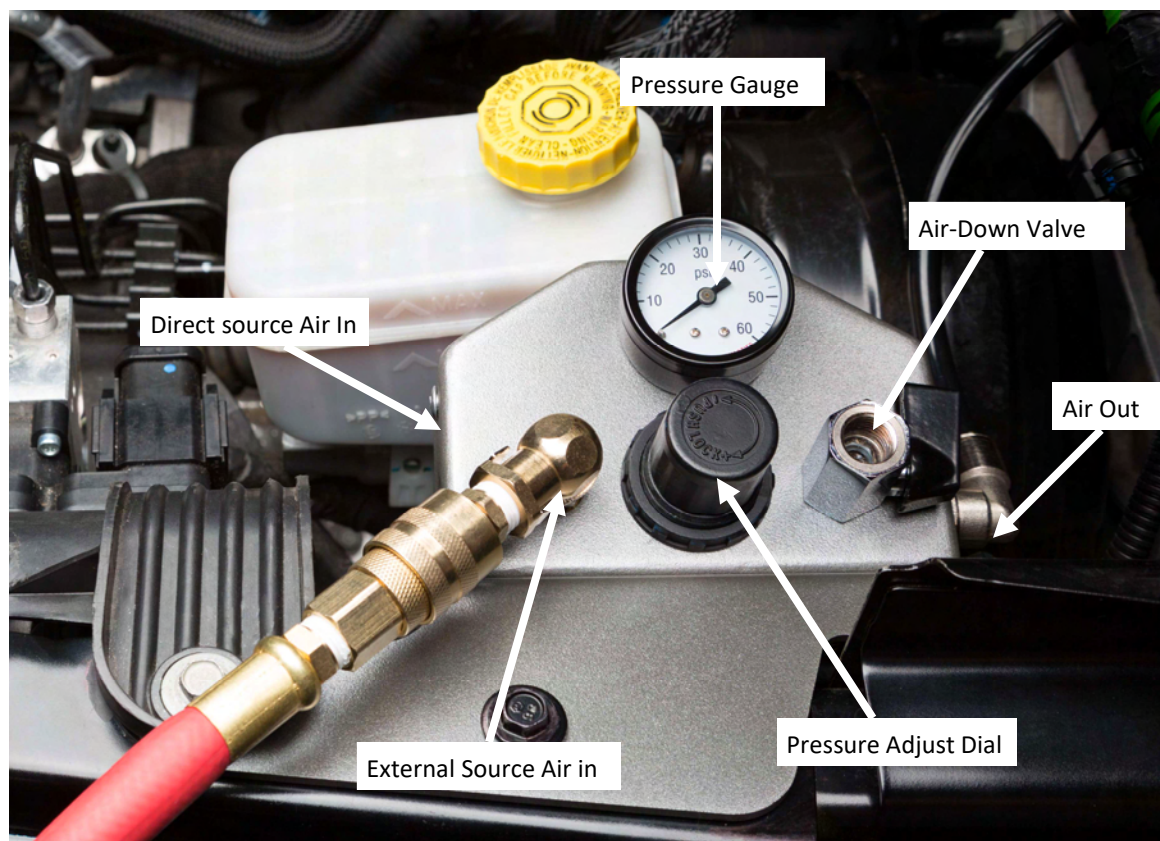

When plumbing a direct air source to the ADS controller you have 2 options. The first option is to use the front external source Schrader port.



To remove the Air-Port Schrader use a 9/16 wrench or socket, spray penetrating oil, wait 5 min and remove slowly. After removed be sure the threads are clean and no adhesive residue is left over.



Add pipe sealer to the threads and install the 90 degree 3/8 swivel using the 9/16 wrench until tight. Connect your high temp hose to the compressor and your done.

The second option is the 3/8 hex plug located on the left side of the ADS controller.



Apply penetrating oil to the 3/8 hex plug threads and insert 1/4 Allen key completely. Slowly remove the plug and make sure not to damage or strip. (you can also use a heat gun to make plug removal easier)



When plug is removed make sure to clean threads and remove all glue residue. You will now apply Teflon tape or thread sealer to your 90 degree swivel and install using our special socket  
You can now hook your high temperature hose from the compressor to the new 90 degree swivel

Congratulations! you have now completed the install of your new Air It Up® 4 Tire on Board ADS System.

**Please perform the following pressure tests.**

1. Pressurize your system with no whips connected to ensure all Schrader's are sealed and everything is working properly (release pressure on each valve to make sure all flowing equal)
2. Connect all your tire whips to the Body Mounted Schrader valves and the tires. Note the tire pressure on the ADS Controller gauge.
3. Listen and Inspect all connections for leaks.
4. If you think you have a leak spray mild soapy water at the fitting and look for bubbles.
5. If you find a leak. Please refer to our trouble shooting section.

(Take a few minutes to try different settings and get familiar with the system)





**Inflation -**


1. Connect your Whips to all 4 corners of your Jeep.
  2. Turn compressor on to pressurize the ADS Unit. The regulator can be adjusted by lifting the adjustment knob to un lock it, Then turning it Clockwise to Increase Pressure or Counter Clockwise to Decrease Pressure. Once you have set it to your factory recommended pressure. The Adjustment Knob needs to be pushed down to Lock the regulator in place. Once you Set it you can Forget it.
  3. The compressor should stop when the ADS is fully pressurized. When the compressor stops listen and inspect all connections for leaks.
  4. If you think you have a leak spray mild soapy water at the fitting and look for bubbles.
- Let your system sit for two minutes and note the tire pressure and compare it to your starting pressure

**Deflation—**


1. Connect your whips to all 4 corners.
2. Check your tire pressure on the ADS Controller
3. Open the Air-Down Valve on the ADS Controller to Deflate your tires. Once you have reached the desired pressure Close the ball valve and verify tire pressures on the ADS Controller gauge.
4. Remove your tire Whips and you are Trail Ready.

## LEAK INSPECTION

To inspect for leaks pressurize your system, take a spray bottle with a solution of mild soap and water and spray suspected area. If you are not sure where the leak is coming from take a systematic approach spraying one area at a time.

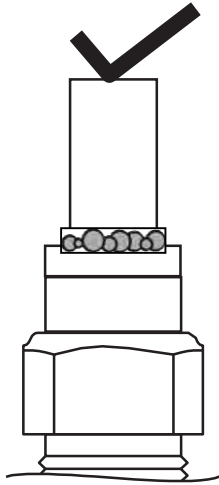

SMALL SOAP BUBBLES THAT DO NOT EXPAND

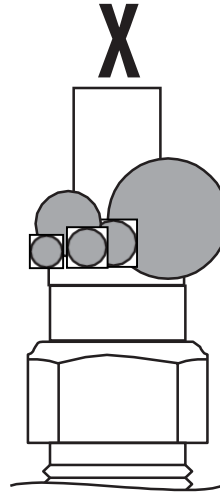


SOAP BUBBLES THAT EXPAND

## LEAK CORRECTION


Most leaks will be in one of these three areas and the correction is listed below. If this does not correct you problem or you need further assistance please call **833-226-4863, option 4** and one of our technical staff will assist you.

LEAK AT AIR LINE TUBE AND AIR FITTING

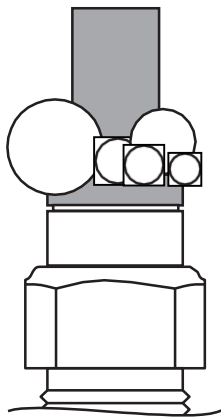


Release Air Line Tube.  
Review proper cuts and procedures.

LEAK AT BASE OF AIR FITTING ON AIR SPRING

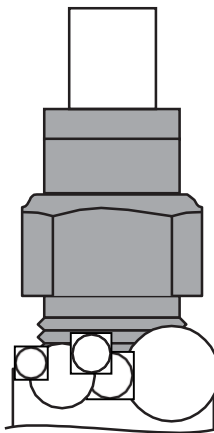

Tighten Air Fitting one turn or until leak stops.

LEAK OUT OF THE VALVE CORE ON INFLATION VALVE

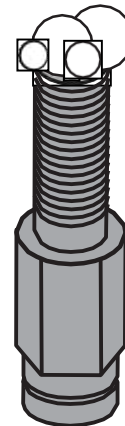

Tighten valve core with valve core wrench on Inflation Valve Cap.



## UP DOWN AIR'S NO FINE PRINT 12 MONTH WARRANTY

Our unique warranty proves our commitment to the quality and reliability of every UpDownAir® product.

**No Fine Print Warranty:** If you are the original purchaser of any UpDownAir® product and it breaks, we will replace it.

UpDownAir's obligation under all warranties is limited to the repair or replacement, at UpDownAir's option, of the defective material. Any cost of removal, installation or reinstallation, freight charges, incidental or consequential damages are expressly excluded from these warranties. Up Down Air Systems, LLC reserves the right to make future revisions to this product and Product Warranty without prior notice or obligation to upgrade your product.

Please read all instructions carefully prior to beginning installation of your Up Down Air Systems, LLC. product.

PLEASE CONTACT US DIRECTLY FOR ALL WARRANTY ISSUES AT:

Toll Free: 883-226-4863    Email: [info@UpDownAir.com](mailto:info@UpDownAir.com)