

# Jeep JL Kicker Sound Bar Upgrade Kit

## Model # JL-KSB 6.5



This product can expose you to chemicals including vinyl chloride and lead, which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

**WARNING**

### Pre-Assemble Kit Includes

- 2 - Kicker 6.5" Premium Speakers with Factory Plugs
- 2 - JL Custom MDF Speaker Mounting Plates
- 2 - High Density Foam Spacers and 2 Foam Speaker Gaskets
- 2 - 4" Tie Straps

### Installation Instructions

**\*\*NO CUTTING REQUIRED\*\***


*Instructions pictures were taken with the Sound Bar Removed from the Jeep. This was for photography purposes only. The Sound Bar DOES NOT need to be removed for Installation.*

#### Factory Speaker Removal & Prep

Instructions are shown for Driver Side Speaker

Repeat same procedure for Passenger Side

1. Using a T30 torx bit, remove Factory Speaker Grills (4 screws). Make sure to save the Grills and Screws for the future, they will not be used for this installation. See pic #1
2. Remove the Foam Pad and set aside. It will not be reinstalled for this application. See pic #2
3. Using a T15 torx bit, remove the 2 screws that secure the Small Factory Speaker (Tweeter). Re-install the Tweeter screws for safe keeping, they will not be used for this installation. See pic #3
4. Pull Tweeter down so that you can see the Plug. Using a small screwdriver push the Locking Tab down and away from you to release the Plug as shown in pic #4.
5. Do not remove the Speaker Port. It can remain in place. Shown by yellow circle in picture #3
6. Use a Tie Strap to secure the Tweeter Speaker Plug. This will ensure that it won't move and rattle after installation is complete as shown in pic #5.

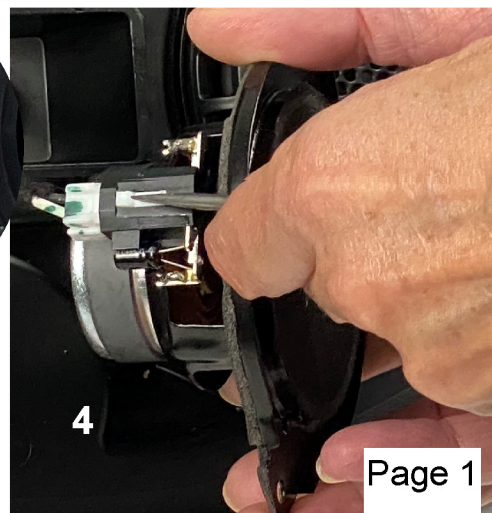

5

Any Questions or  
Comments, call Bob

616-655-1000

Page 1