


Driver Side (Pic 16 & 19) **Passenger Side** (Pic 17 & 20)

****White Circle Denotes Terminal Pocket Position**

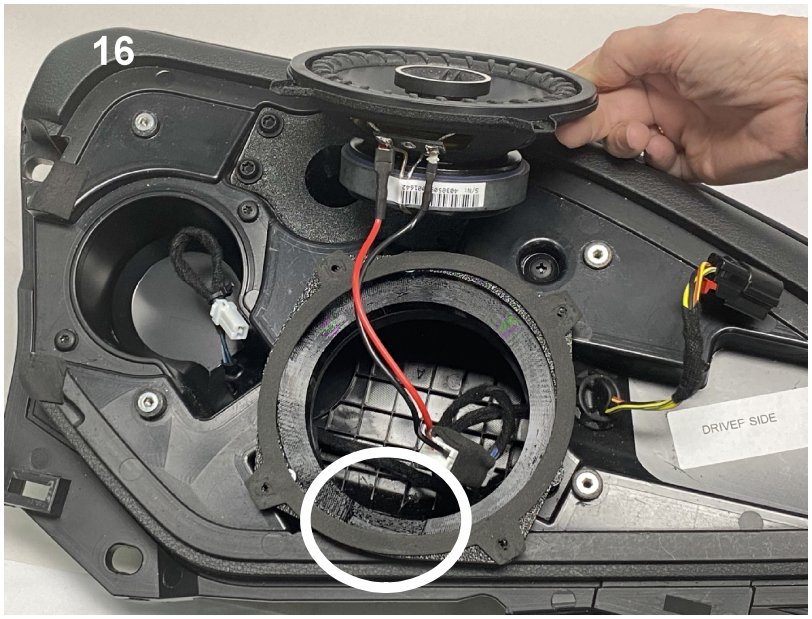

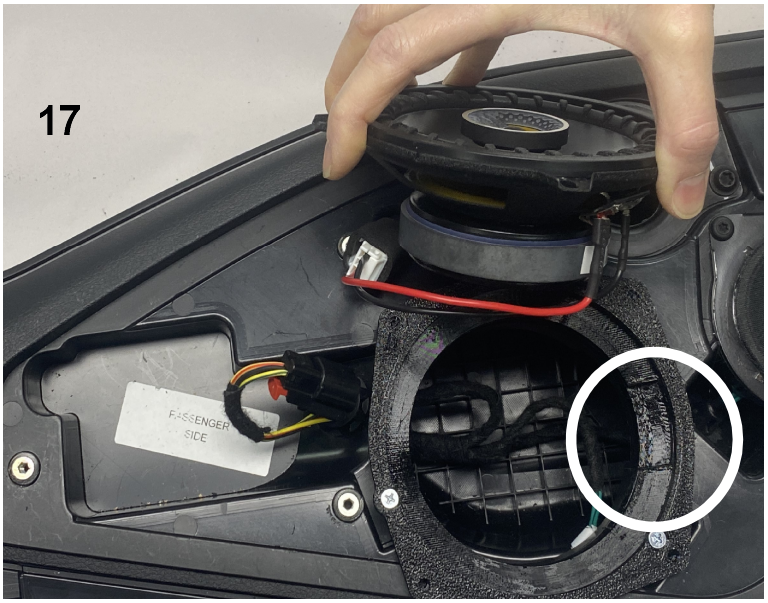

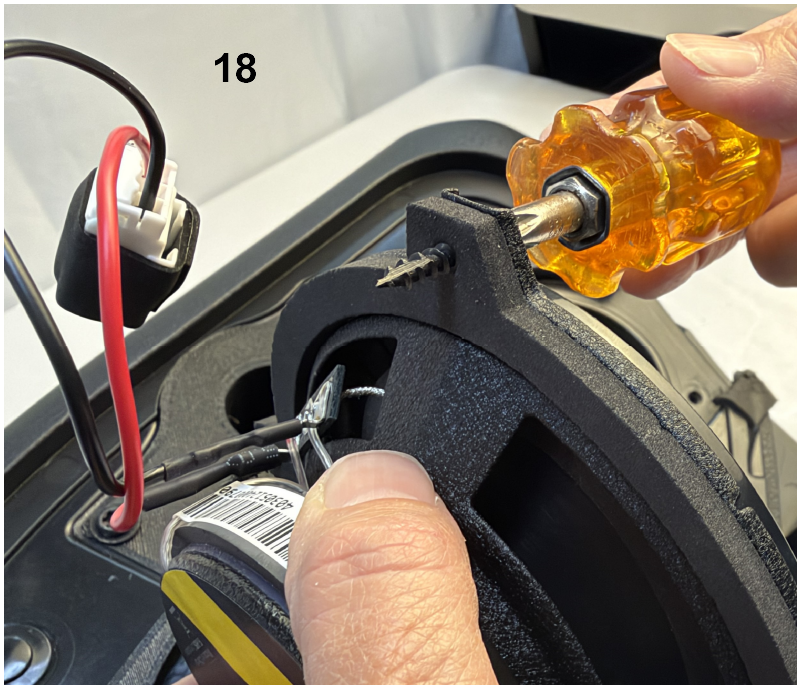

17. Install 4 Hole Gasket on Speaker using the 4 #8 Black Screws to hold Gasket & Screws in place as shown in picture #18

18. Plug Speaker into the Sound Bar. Align Speaker Terminals to Terminal Pocket on Adapter as shown pic #16 for Driver & #17 for Passenger.

19. Install Speakers into Sound Bar. Get all 4 Screws started first, then tighten until snug. Make sure the Terminals stay aligned with the pockets.

20. Turn System on to verify it is working correctly before proceeding to Grill Installation..

*** Refer to Page 5 for Final Install Pictures



