

6. Using a T15 bit, remove the 3 Screws that secure the Large Speaker (woofer). Re-install the screws into the Sound Bar without the Speakers as shown in picture #6.  
7. Use a small screwdriver to press Locking Tab down and away to release Plug as shown in pic #7  
8. Install the Speaker Systems into the Jeep. Pay attention to the Driver Side and Passenger Side as shown in picture #8.



9. Plug the Speaker System into the Soundbar as shown in picture # 9.



10. While holding the Mounting Plate close to the Sound Bar, get all 4 Screws started a few turns as shown in pic #10.

11. Tighten Screws up evenly, tighten each screw 3 or 4 turns. When Gasket touches the Sound Bar, ensure that Gasket is seated evenly before snugging up all of the Screws. Stop when the Screws feel tight.

**Do Not Over-Tighten**

12. After 3 or 4 days, the Gasket will have had time to seat. Go back and re-check the Screws. Re-tighten if necessary.

**Recommended Radio Settings :**

Bass 0 Mid 0 Treble 0

These settings will give the most accurate sound from the Speakers.

**An optional setting is**


Bass +3 Mid 0 Treble +3

Or adjust to taste



Driver Side

Passenger Side

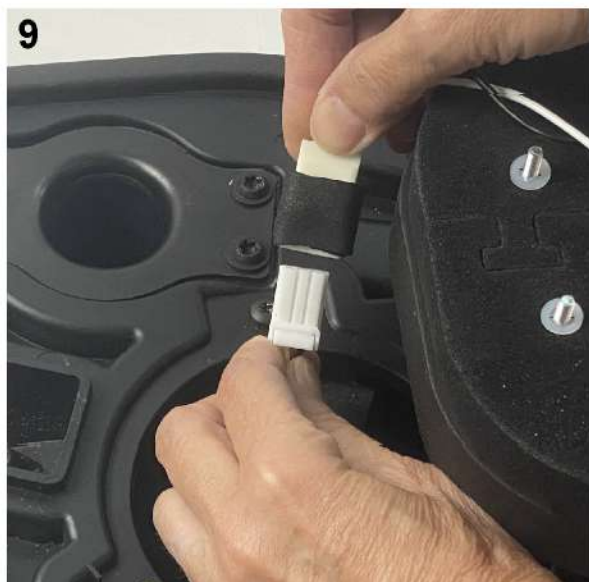

Questions or Comments  
call Bob, 610-358-1886