


INSTRUCTIONS:

- If using with a 24V system, be sure to replace relay with 24V unit
- Connect red fused wire to battery
- · Connect black wire to suitable ground
- Install switch at location of your choice
- Plug wiring harness to the LED light bar
- Zip tie all wires to avoid damages
- Test light to ensure proper function

WIRING DIAGRAM

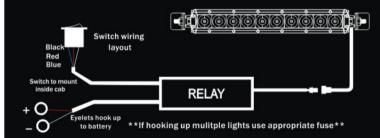

FUSE CHART

SIZE	6''	10''	20''	30" - 40"	50
FUSE	5 AMP	10 AMP	15 AMP	20 AMP	30 AI

KIT CONTENTS

One [1] LED light bar

One [1] Wiring Harness

One [1] Switch

Two [2] Long Leg Mounting Bracket

Two [2] Short Leg Mounting Bracket

One [1] Instructions Paper

One [1] Warranty Card

FEATURES

- Reflector Patterns Available in : Spot, Flood, Combination or Driving Beam
- 50,000 + Hours Average Lifespan
- 9-36 Volt DC Input
- 100% Optically Clear and Unbreakable LEXAN Lens
- Instant On/Off , No Warm-up
- Operating Temp: -40~+145 Degree Centigrade
- Dual-Oversized Heat Sink
- Low Power Consumption
- IP69K Waterproof Rating [higher than Ip68]
- · Military Standard Breather
- Waterproof DEUTSCH Connector
- Pass Testing: High Temperature, Low Temperature, High Pressure, Vibration, UV, Salt and Fog, Sand and Dust,
- Certificates: E-mark, CE, RoHS, IP68, IP69K, SAE
- Usage: Off Road, Watercraft, Snowmobile, Agriculture, Mining, Police, Military/ Defense, Powersports etc