


XK GLOW

MX-BG-JP-ADV



XKMAX PANEL GAP LED KIT FOR JEEP ***INSTALLATION INSTRUCTIONS***

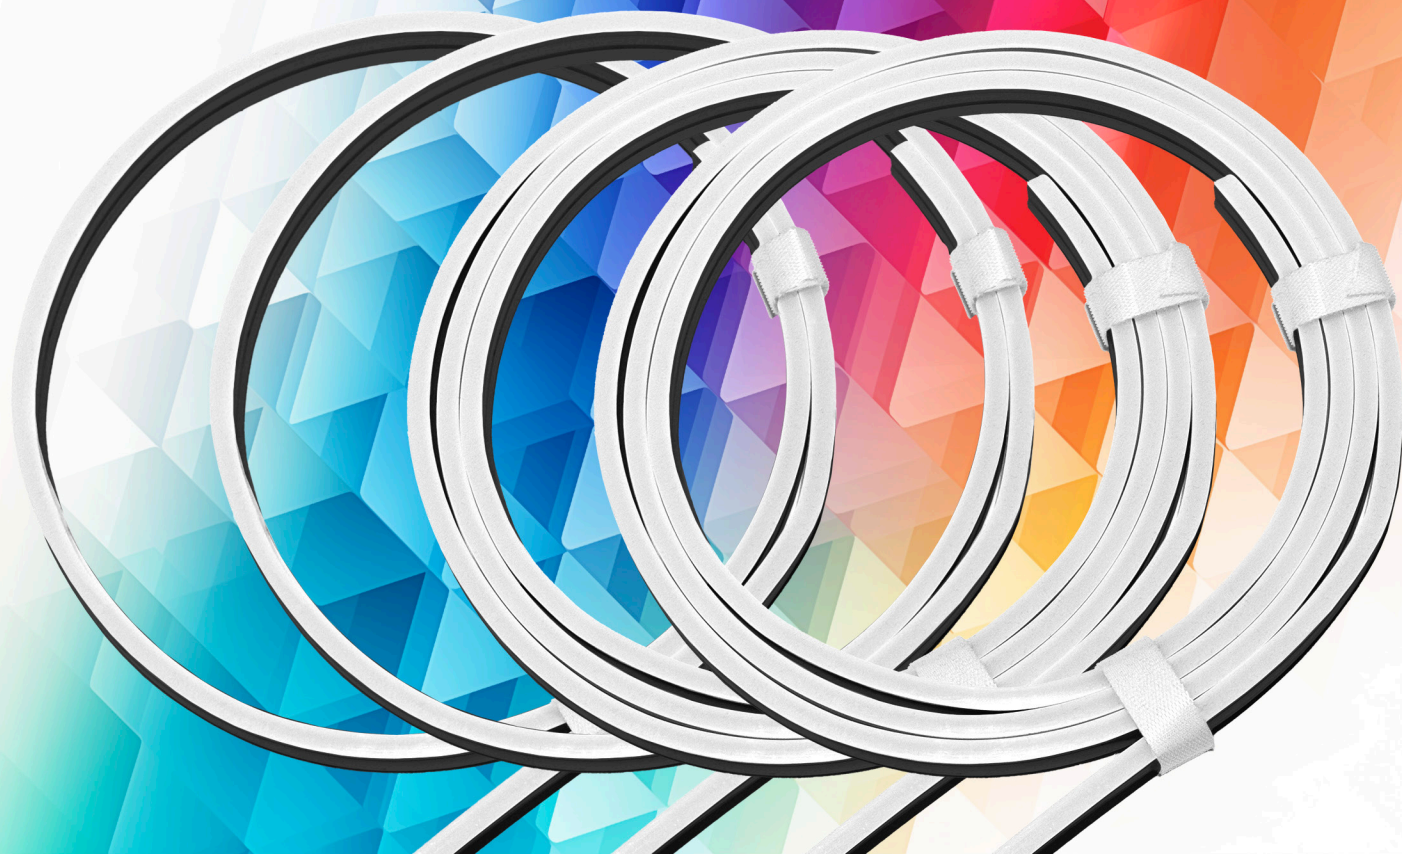

xk@xkglow.com

(217) 679-1915

INPUT VOLTAGE	CONTROLLER MAX LOAD	MAX POWER PER 36" STRIP	MAX POWER PER 80" STRIP
11-14V	5A PER CHANNEL	18.9W	42W

WARRANTY AND DISCLAIMER

Within **THREE** years after the purchase date, the original buyer may return any XKGLOW lighting product that has failed due to a defect in materials or workmanship to receive a replacement product.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

ADDITIONAL DISCLAIMER TERMS

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.


RETURN/EXCHANGE PROCEDURE

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 30 days from date of purchase. Original shipping charges are not refundable.



We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

MOUNTING INSTRUCTIONS

1. Test all components before mounting: As shown below, plug ALL light units together and connect them to the controller and the switch wiring harness. Connect the **RED** battery terminal to the **POSITIVE** pole of 12V DC battery. Connect the **BLACK** battery terminal to the **NEGATIVE** pole. Turn on the switch and push the **touch button** to test all lights. If the lights show any defects, please contact us and we will be happy to replace them for you.

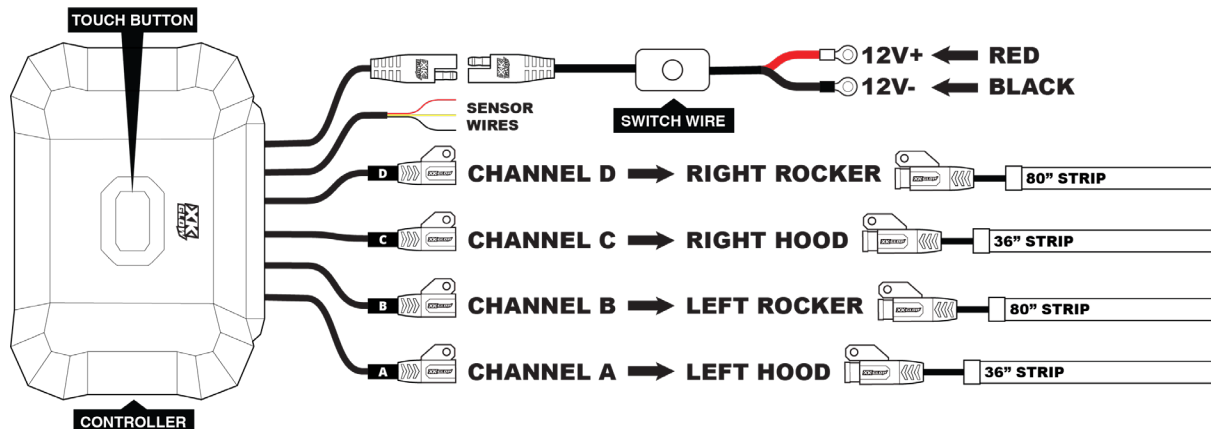

2. Plan Mounting Locations / Strip Cutting: Disconnect the tested lights from the vehicle's battery. The two 36" strips are intended to be used on each side of the hood. Prop the hood open and thoroughly clean the inside edge on the left and right side where the strips will be mounted. The 80" strips are to be used along the rockers on each side of the vehicle. Thoroughly clean this area as well. You can use masking tape to loosely secure the strips in place. **If necessary, the strips can be cut with sharp scissors. The cut end of the strip will need to be sealed up with silicone (not included).** Before mounting the strips, lay them flat and measure the length using a tape measure. Take note of the length in **INCHES**. We will need this measurement when configuring the kit within the XKmax App. **See Step 7 for more info.**

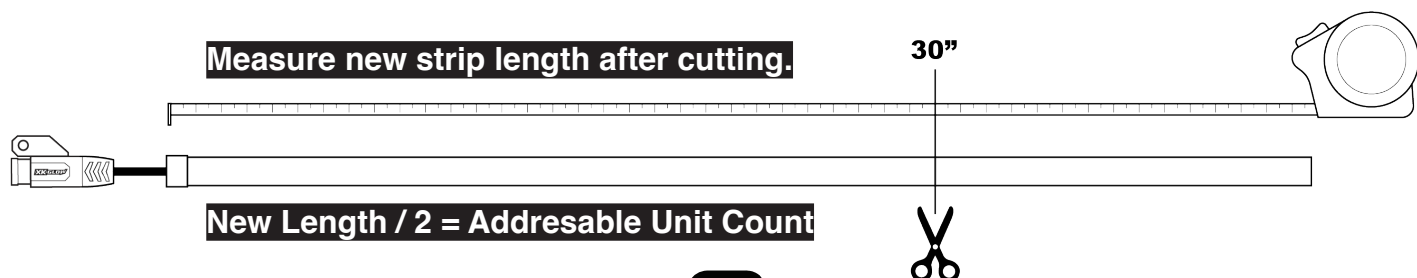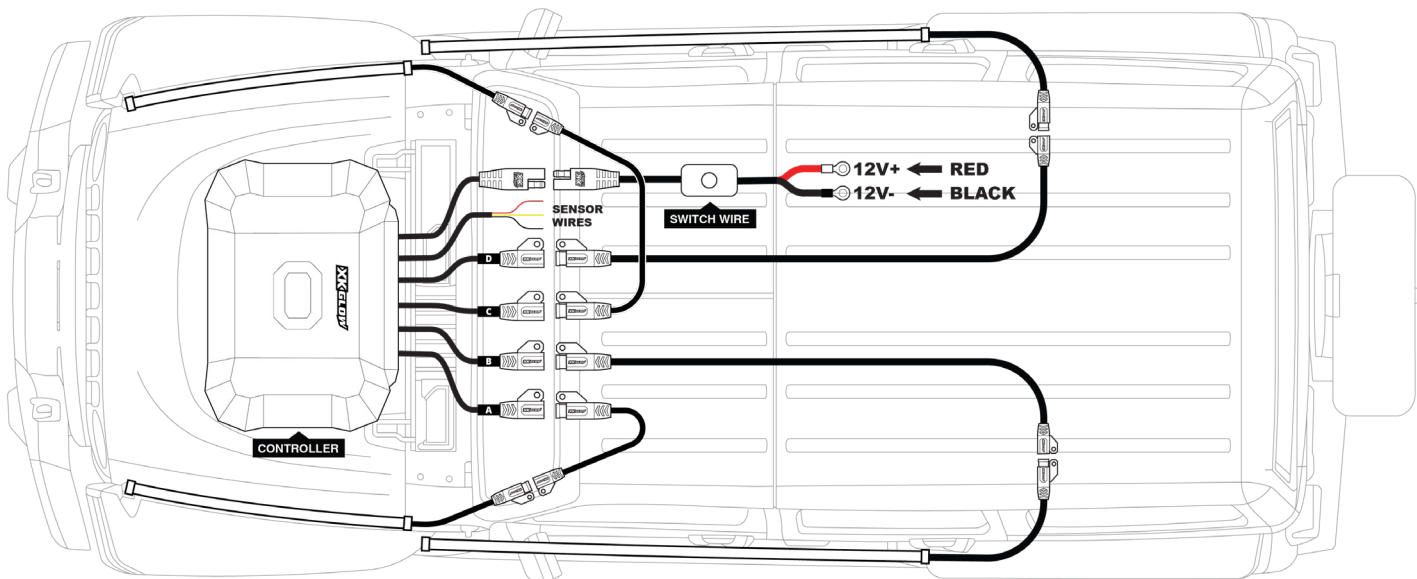

3. Mount the Lights: Following the diagram to the right, mount the 36" strips to each side of the hood using the 3M double sided tape on the back side of the strip. **The strip goes on the INSIDE of the hood so that the strip itself is not visible when the hood is closed.** The plug end of the strips should be closest to the hinge and windshield. Start at the bottom and work your way up to the end of the hood. The strip should end right before the hood latch. The round end of the strips should be pointing downward as this is what will illuminate the hood gap.





The 80" strips are to be used along the rocker panel on each side of the Jeep. The plug end of the strip should be at the rear of the vehicle. Remove the tape backing and firmly press the strip into place starting from the rear of the vehicle and moving forward. The rounded edge of the strip should face upward here.

Connect an extension wire to each strip and the switch wiring harness. The 6ft wires are for the hood lights and the 13ft wires are for the rocker lights.

WARNING- Do not force the plugs together! If they don't snap together, verify that all the pins line up. If a pin is out of place, it must be straightened up for the plug to snap together.


4. Secure all wires and connectors: Use provided screws or zip ties to neatly mount and hide any loose wires. The tabs can also be cut off to help the wire fit through tight spaces. Make sure they are not touching anything hot or located on moving parts. Install the ON/OFF switch in a dry and convenient location.

5. Tap sensor wires: (Optional) If you tap the sensors as specified, the triggered action has already been setup in the controller. However, you can use it to other functions such as courtesy light and customize the triggered actions in Config --> Sensor Wires section. If you would like to use the lights as turn signals and brake, refer to the diagram to the right. Remember what color wire is attached to which function, as you will select the sensor wire color in the app to assign a light sequence. Use diagram below to tap wires using included T-tap connectors.

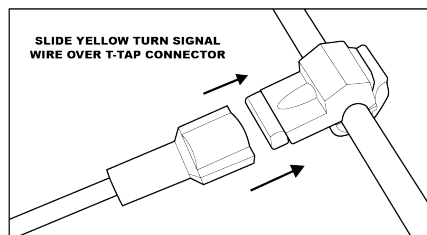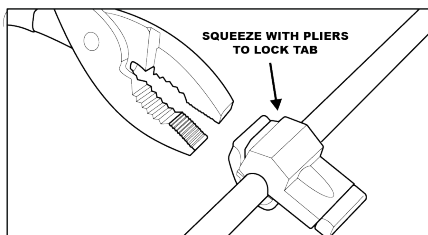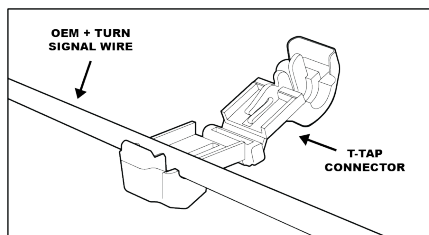


6. Connect to 12V DC power: Firmly connect the wire terminals to the positive and negative poles of the battery. Power on, download the XKmax App, and scan the QR code on Page 5 to load your kit presets.


7. OPTIONAL: Configure your kit with cut strips: If you would like for the gradients and patterns to show perfectly on the cut strips, you will need to configure the strips within the app. This is totally optional, but will give you the best possible light effect. Follow the steps below to add your custom length strips.

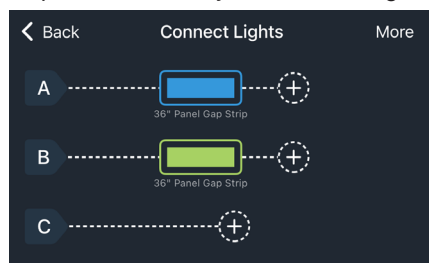

Tap the Config. icon at the bottom and then click "Connect Lights." Select and drag the current lights to the trash bin at the bottom. Then click the + icon for Channel A.

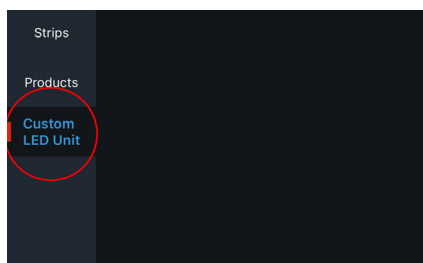

Select Custom LED Unit on the left hand side and then click the + square to add a custom light.

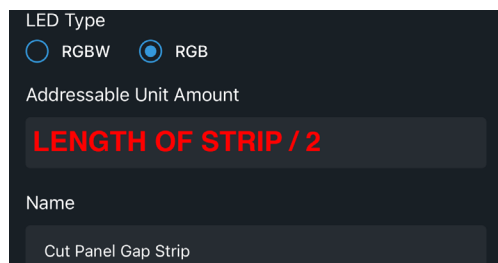

Select RGB. The addressable unit amount is the length in inches measured earlier divided by 2. Example- 30" / 2 = 15 addressable units. Add a name and photo and then click Save. Now select your new LED unit and it will appear on the LED map. Add the LED unit to Channel B to finish.

DOWNLOAD XKMAX

Scan the QR code below to download the XKmax App



PRESET 1

A

PRESET 2

B

PRESET 3

C

OFF

D

REMOTE

Buttons customizable. See App Instructions.

LOAD YOUR KIT PRESET



MX-BG-JP-ADV

NEED MORE LIGHTS?



UPGRADE ACCESSORIES

PRODUCT FEATURES



+ INSTALL VIDEOS

MONTHLY PHOTO CONTEST:
POST YOUR
BEST PHOTO OR
VIDEO FOR A
CHANCE TO WIN
\$150!

JOIN THE CIRCLE!
CREATE. CONNECT. COMMUNITY.

Here at XK GLOW, we value the **COMMUNITY** built around our products. So we developed our own social media platform into all XK GLOW apps! **CREATE** a Circle account to share photos of your ride, see exclusive sneak peaks into product development, and **CONNECT** with the entire XK GLOW family!