


PART NUMBER: **PRJ1863** PRODUCT: **ALUMINUM HOOP STEP** APPLICATION: **18- C Jeep JL** 

## PREDATOR PRO




HARDWARE DESCRIPTION	QTY.
HWKT-00014X	
5/16 CAGE Nuts	12
5/16 x Flange Bolt	12
M8-1.25 x 30mm Flanged Hex Bolt	6

**<u>Step 1</u>**: Identify Driver and Passenger side Nerf-step.

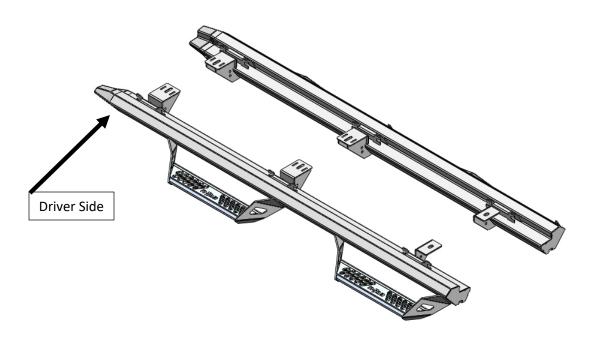

**Step.2** Starting with the passenger side step rail, install the supplied (x6) 5/16" snap nuts into the two notches in each mounting bracket.

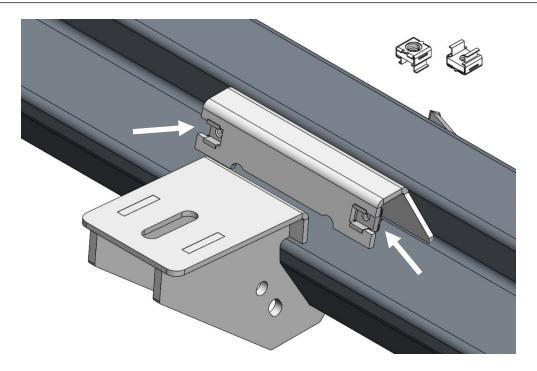

**Step. 3** Carefully raise step rail up to the pinch weld of the body and align brackets up with the factory mounting locations.

<u>Step. 4</u> Beginning with the center bracket start one of the supplied M8X30mm Hex bolts and leave loose to help steady the step to install the remaining hardware.




<u>Step 5.</u> Next, go ahead and install the two remaining M8x30mm hex bolts in the upper mounts and leave loose at this time.



PART NUMBER: **PRJ1863** PRODUCT: **ALUMINUM HOOP STEP** APPLICATION: **18- C Jeep JL** 

<u>Step. 6</u> Next, start all (x6) 5/16'x3/4'' Flanged hex bolts in the upper bracket mounts through the pinch weld and leave loose.

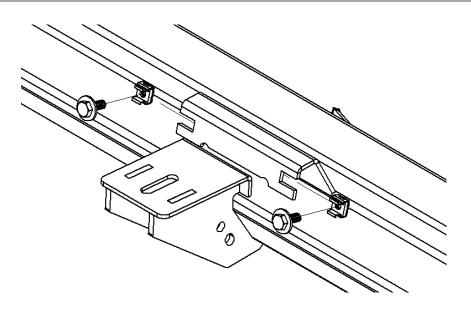

**<u>Step. 7</u>** After finial positioning, tighten all (x6) 5/16 "x  $\frac{3}{4}$ " hex bolts no more than 6 ft/lbs. torque.

**<u>Step. 8</u>** Next, tighten all (x3) upper mounting positions to 17-20 Ft/lbs. torque.

**<u>Step. 9</u>** Repeat steps 3-6 for passenger side.