

Quadratec® Premium Vinyl Rucker Panel Mountain Decal

Installation Guide: For Side Graphics

Online video also available: search for “Vinyl Install” on Quadratec.com



Prepare your vehicle:

Clean your vehicle to remove all dirt and debris. DO NOT APPLY WAX. For best results, use a clay bar to clean the area where you plan to install the decal.

For best results, we recommend that you install the decal indoors or out of direct sunlight and blocked from wind. Any breeze can make installation very difficult. We recommend the use of a generous amount of easy-to-mix spray-on mounting solution. Please do not attempt to install this large graphic without a helper.

Make your own vinyl decal wet mounting solution:

Mounting solution is a mixture of 16 oz. water with 2 drops of baby shampoo.

- 1. Fill a spray bottle with 16 oz. (2 cups) of water.*
- 2. Add 2 large drops of baby shampoo to the bottle.*
- 3. Close bottle and shake well.*


NOTICE

YOU WILL NEED TWO PEOPLE TO INSTALL LARGE GRAPHICS. DO NOT ATTEMPT TO INSTALL WITHOUT A HELPER. USE A GENEROUS AMOUNT OF MOUNTING SOLUTION.



The Trusted Source

Large Side Vinyl Decal Installation

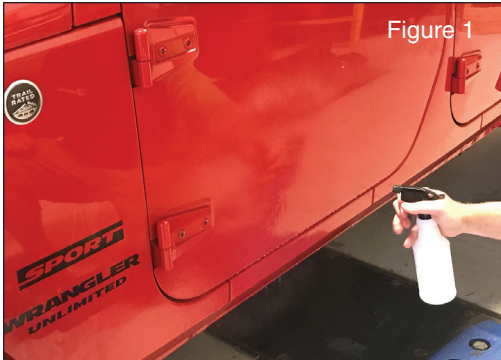

Spray the area where you'll be installing the decal liberally with the pre-mixed mounting solution. Use enough to completely wet the area. This will allow the decal to "float" and help you position the decal more easily. (FIG1)



Remove the decal from the backing paper. Generously wet the decal as you peel it away from the backing. This helps reduce the effect of "static" created as you handle the vinyl decal, and lessens the chance of dust and dirt sticking to the adhesive. (FIG2)



Position the decal on to your Jeep where you would like it. Do not press it into place yet. Simply lay the decal gently, allowing it to "float" on the surface. (FIG3)



Move the decal into the exact position you would like it. Line up the decal with the body lines on your Jeep that match the decal, leaving an even gap on all edges. (FIG4)



The Trusted Source

Final Installation & Helpful Tips



Once you are happy with the position of the decal, use the provided squeegee to push out the mounting solution, locking the decal in place. Always start in the center of the decal and work towards the outer edges, pushing all the liquid and any air bubbles out from under the decal. (FIG5)

Work your way around the entire decal, each time starting from the center and pushing toward an edge. You should cover every square inch of the decal with this technique. Repeat the above steps for other side of vehicle and all remaining decals.



Install Complete. Enjoy the look of your new Quadrattec Premium Vinyl Decals!



The Trusted Source

Final Installation & Helpful Hints



Caring for your vinyl decal

Once the decal is installed onto your vehicle, it will last for many years with some proper care.

- 1. Never use a high pressure washer directly on the decal.*
- 2. Never use household cleaners like hand soap or dishwashing detergent.*
- 3. Always clean your decal with the same mild car wash soap you use on the rest of your Jeep, paying special attention to be sure you don't catch the edges of your new decal with a sponge or wash mitt.*

© Quadratec, Inc. 2017.
All Rights Reserved. 8.15.17

Product #13135.0700
Instructions: #12999.3087



The Trusted Source