
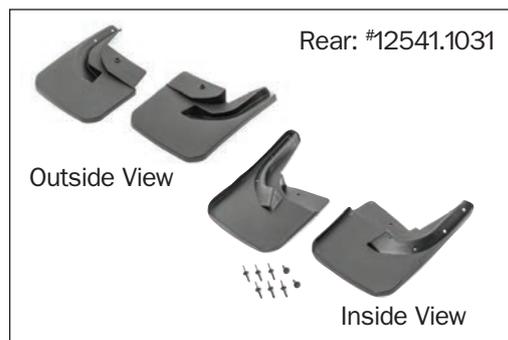


Quadratec® Splash Guards

Installation Guide: Front and/or Rear

For 2018 - Current JL & JLU Wrangler Vehicles: #12541.103X

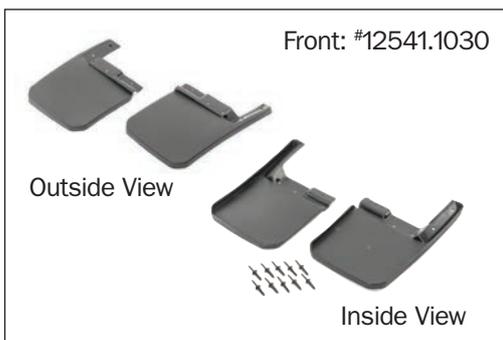

PARTS LIST FRONT:

Front Splash Guards - QTY 2
Plastic Rivets for Front - QTY 10

REQUIRED TOOLS FRONT:

Safety Glasses
Plastic Rivet Gun
Diagonal Cutting Pliers
Trim Clip Removal tool
Electric Drill
1/4" Drill Bit

PARTS LIST REAR:

Rear Splash Guards - QTY 2
Tapping Screws - QTY 2
Plastic Rivets for Rear - QTY 6

REQUIRED TOOLS REAR:

Safety Glasses
Plastic Rivet Gun
Electric Drill
1/4" Drill Bit
1/4" Ratchet
1/4" Drive 8mm Socket

CAUTION

READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS BEFORE ATTEMPTING TO INSTALL THIS PRODUCT. ALWAYS WEAR SAFETY GLASSES DURING INSTALL.



The Trusted Source

Installation Instructions: Front



Put on safety glasses. Start the vehicle and turn the wheel to gain access to inner wheel liner. See (FIG 1).



Using a clip removal tool remove the two Christmas tree clips shown (FIG 2).



Using diagonal cutting pliers remove the two plastic rivets from the fender flare shown in (FIG 3).



While holding the splash guard in place, use a plastic rivet gun to install the 4 plastic rivets into the now open holes. (FIG 4)



Locate the 5th small hole in the splash guard and drill through it and into the wheel liner using an electric drill and 1/4" drill bit. (FIG 5)



Install a plastic rivet through splash guard and wheel liner. (FIG 6) Repeat all steps for other side of the vehicle.

Front Installation is now complete.



The Trusted Source

Installation Instructions: Rear



Put on safety glasses. Using a 8mm socket and ratchet remove the inner flare liner bolt and discard. (FIG 7).



Using the provided tapping screw, loosely install splash guard as shown. Take care to line up edge of splash guard with edge of bumper. (FIG 8).



While holding the splash guard in place on the bumper drill 3 holes through the splash guard into the bumper using a drill and 1/4" drill bit. (FIG 9)



Using a plastic rivet gun install the 3 plastic rivets into the 1/4" holes. (FIG 10).



Lastly, finish installing the tapping screw with an 8mm socket and ratchet but do not over tighten. (FIG 11)

Repeat all steps on the opposite side of the vehicle.

Rear Installation is now complete.



The Trusted Source

Quadratec® Exclusive Two Year Limited Warranty

Your Quadratec® branded accessories are covered by the following **Limited Warranty** provided exclusively by Quadratec, Inc., 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. Quadratec neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**. This **Limited Warranty** does not apply and is not cumulative to any accessory or part distributed by Quadratec for which the Manufacturer provides a separate written warranty.

What is Covered: Subject to the terms, exclusions and limitations herein and with respect only to Quadratec branded accessories first sold in the United States, Quadratec warrants to the initial retail purchaser only that your Quadratec accessory shall be free of defects in material and workmanship: **for a period of two (2) years from date of retail purchase.**

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the Quadratec accessory is installed or other transfer third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 2 year from date of initial retail sale. Quadratec reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

What is Not Covered:

Your Quadratec **Limited Warranty** does not cover products or parts Quadratec determines to have been damaged by or subjected to:

(a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

Remedy Limited to Repair/Replacement:
The exclusive remedy provided hereunder shall, upon Quadratec inspection and at Quadratec's option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration should first contact Quadratec to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither Quadratec nor any independent Quadratec distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©Quadratec, Inc. 2018. All Rights Reserved.
8.23.18 A4 Version

Part #12999.3108



The Trusted Source