

## JEEP JK WRANGLER SOFT TOP STORAGE SYSTEM MODEL: STS - JK 4 DOOR

MADE USA

STEP 1: LOCATE STUDS ON GARAGE WALL AND MARK. THE SOFT TOP STORAGE HANGER MUST BE ASSEMBLED BEFORE HANGING ON WALL. [ SEE ASSEMBLY INSTRUCTIONS ]

STEP 2: MOUNTING HEIGHT: AT LEAST 48 INCHES FROM THE FLOOR TO THE BOTTOM ROW OF MOUNTING SCREWS AS SHOWN IN PICTURE #1. ATTACH THE SOFT TOP ASSEMBLY MOUNT TO THE WALL WITH SUPPLIED SCREWS. AS SHOWN IN PICTURE #2.

STEP 3: AFTER MOUNTING SOFT TOP
STORAGE SYSTEM TO THE WALL YOU ARE
READY TO HANG YOUR SOFT TOP BOW
ASSEMBLY TO BRACKET SHOWN IN PICTURES
3, 4 & 5. IT HELPS TO HAVE TWO PEOPLE
.\*\*MAKE SURE THAT THE SOFT TOP RODS BOW
AWAY FROM THE WALL AS SHOWN IN PICTURE
#4.

STEP 4: HANG THE SIDE WINDOWS NEXT AS SHOWN IN PICTURE #6. . HANG LOWER WINDOW ON MOUNT FIRST.

STEP 5: HANG THE REAR WINDOW NEXT BY SLIDING THE WINDOW TAILGATE BAR INTO BRACKETS AS SHOWN IN PICTURE #7. THE ZIPPER SIDE OF WINDOW FACES OUT.

## CONGRATULATIONS YOU'RE DONE!




















ANY COMMENTS OR QUESTIONS? CALL BOB 610-358-1886



USE HOLES MARKED **A** FOR MOUNTING WITH STUDS 16 " ON CENTER
USE HOLES MARKET **B** FOR MOUNTING WITH STUDS 24" ON CENTER
FASTEN BOTH TOP & BOTTOM ROW OF SCREWS [ #12 X 1 1/2 " LONG PHILLIPS SCREWS ]
MOUNTING HEIGHT: 48 INCHES MINIMUM FROM FLOOR TO BOTTOM OF MOUNT.



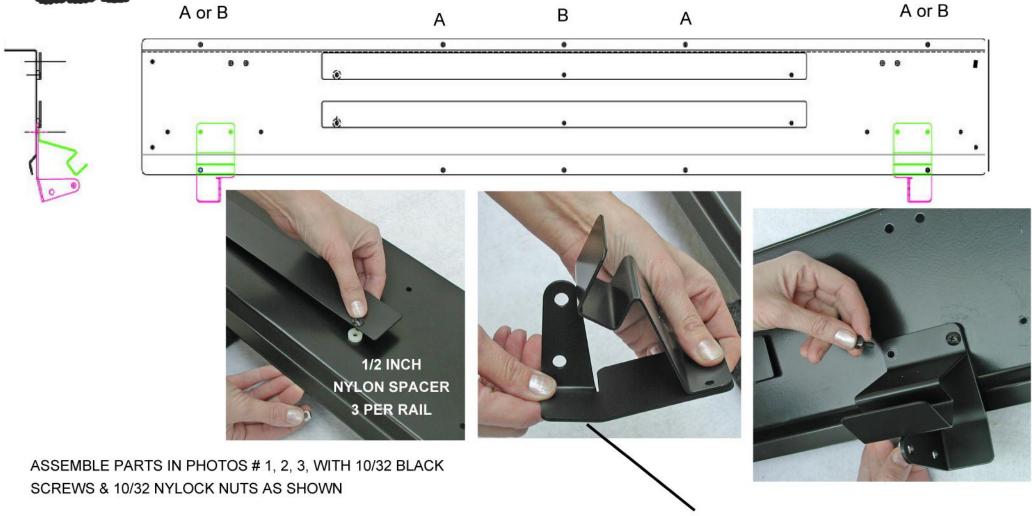

## SOFT TOP STORAGE ASSEMBLY VIEW MODEL # STS JK 4D

\*\*BE AWARE THAT THERE IS A LEFT SIDE AND RIGHT SIDE FOR THE SOFT TOP BOW HANGER BRACKET. THE PHOTO IS SHOWING THE RIGHT SIDE BRACKET.