



Res-Q Automatic Tire Deflator 4PC w/Bag


Instruction Manual: #95203.1500



- KIT CONTENT LIST:**
- A. Storage Bag
 - B. Automatic Tire Deflator (X4)

- REQUIRED TOOLS:**
- Safety Glasses
 - Tire Pressure Gauge

COMPONENT IDENTIFICATION

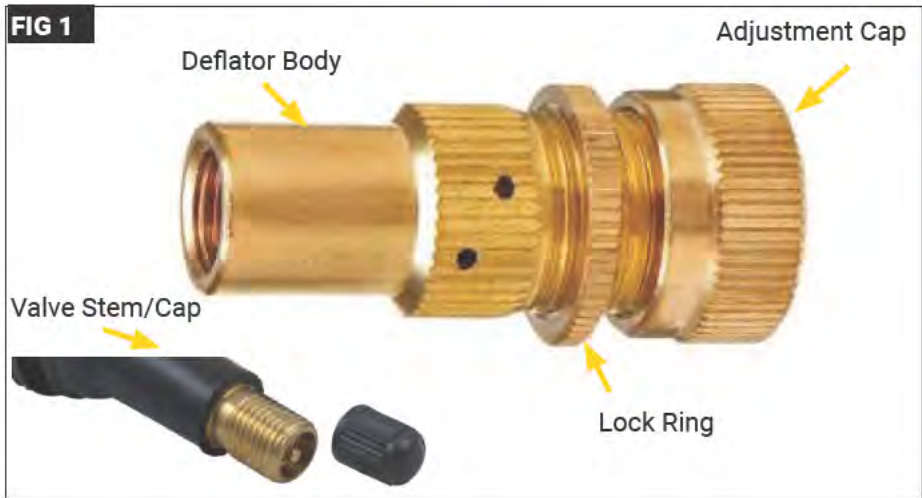

The Res-Q Automatic Tire Deflators are designed to be set between 10 - 30 PSI. Please refer to (FIG 1) for part names used throughout this manual.

- ⚠ WARNING ⚠** TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.
- ⚠ WARNING ⚠** RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. DO NOT USE IF DAMAGED.



⚠ WARNING ⚠

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

⚠ CAUTION ⚠

RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. TORQUE AND RECHECK FASTENERS AFTER 250 MILES AND FREQUENTLY THEREAFTER. DO NOT USE IF DAMAGED.

NOTICE

CAREFUL ATTENTION IS REQUIRED TO THIS INSTRUCTION OR OPERATION BUT DOES GENERALLY NOT RELATE TO PERSONAL INJURY. DAMAGE TO YOUR RES-Q PRODUCT OR OTHER PROPERTY MAY RESULT IF YOU DON'T FOLLOW INSTRUCTIONS.

A FEW WORDS ABOUT PRODUCT SAFETY:

Your Res-Q Automatic Tire Deflators are intended to enhance the utility and enjoyment of your off-road capable vehicle. Follow safety information and installation recommendations. Throughout these instructions is important safety information that is generally preceded by one of three signal words indicating the relative risk of injury, property damage or adverse consequence.

The signal words mean:

⚠ WARNING ⚠

A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN DEATH OR SERIOUS INJURY. YOU CAN BE KILLED OR SERIOUSLY HURT IF YOU DON'T FOLLOW INSTRUCTIONS.

⚠ CAUTION ⚠

A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN A MINOR OR MODERATE INJURY. YOU CAN BE MODERATELY HURT AND ALSO MAY SUFFER PROPERTY DAMAGE IF YOU DON'T FOLLOW INSTRUCTIONS.

BEFORE YOU BEGIN USAGE:

Congratulations on your purchase of the Res-Q Automatic Tire Deflators. When unpacking, check to make sure all parts are included and not damaged due to shipping. If any part is missing or broken, please call Customer Service at 800-745-6037 as soon as possible. Thank you again for your purchase.

⚠ CAUTION ⚠

READ ALL SAFETY MESSAGES AND ALWAYS WEAR SAFETY GLASSES WHEN WORKING WITH TOOLS.

⚠ WARNING ⚠

ALWAYS INFLATE TIRES TO MANUFACTURER'S RECOMMENDED TIRE PRESSURES. RE-INFLATE TIRES BEFORE RESUMING NORMAL ROADWAY SPEEDS. REPLACE THE VALVE STEM CAP.

⚠ WARNING ⚠

DETACH YOUR RES-Q AUTOMATIC TIRE DEFLATORS BEFORE OPERATION OF VEHICLE.

⚠ WARNING ⚠

IF YOU ARE DRIVING A VEHICLE WITH NON-BEAD LOCK WHEELS, AND YOUR TIRES HAVE INSUFFICIENT AIR PRESSURE, THE TIRE MAY SEPARATE FROM THE WHEEL.

⚠ WARNING ⚠

RETURN TIRE PRESSURE TO THE VEHICLE'S FACTORY RECOMMENDED TIRE AIR PRESSURE BEFORE NORMAL ROADWAY USAGE. THE FACTORY TIRE AIR PRESSURE RECOMMENDATIONS ARE LOCATED ON THE DRIVER'S SIDE DOOR FRAME.



Put on Safety Glasses. Remove valve stem cap from the valve stem and deflate a tire to your desired air pressure using a Tire Gauge. This will be the pressure the Res-Q Automatic Tire Deflator will be set to. (FIG 2)



Fully close the Adjustment Cap by tightening clockwise. Attach the Res-Q Automatic Tire Deflator to the valve stem ensuring fully seated on the threads. (FIG 3)



Begin to turn the Adjustment Cap counterclockwise slowly until air begins to escape from the Res-Q Automatic Tire Deflator. Immediately tighten the Adjustment Cap to stop the escape of air from the Res-Q Automatic Tire Deflator. Turn the Lock Ring counterclockwise to firmly contact the Adjustment Cap to lock the desired tire pressure for this Res-Q Automatic Tire Deflator. (FIG 4) Remove the Res-Q Automatic Tire Deflator from the valve stem and now your Res-Q Automatic Tire Deflator is calibrated to your desired set pressure. Repeat the process for the remaining Res-Q Automatic Tire Deflators.

Note: To reset your Res-Q Automatic Tire Deflator, loosen the Lock Ring by turning clockwise and then closing the Adjustment Cap by turning clockwise. Then repeat the calibration process.

Note: If the Lock Ring is loose when removing from Storage Bag, the Res-Q Automatic Tire Deflator may have lost its calibration. Repeat calibration process.

Res-Q Exclusive Three Year Limited Warranty

Your Res-Q branded accessories are covered by the following Limited Warranty provided exclusively by Res-Q, 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. Res-Q neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or Limited Warranty. This Limited Warranty does not apply and is not cumulative to any accessory or part distributed by Res-Q for which the Manufacturer provides a separate written warranty.

What is Covered:

Subject to the terms, exclusions and limitations herein and with respect only to Res-Q branded accessories first sold in the United States, Res-Q warrants to the initial retail purchaser only that your Res-Q accessory shall be free of defects in material and workmanship: for a period of three (3) years from date of retail purchase.

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the Res-Q accessory is installed or other transfer to third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to three (3) years from date of initial retail sale. Res-Q reserves the rights to: **(a.) require invoice or other proof your accessory is within the terms of this Limited Warranty as a condition of warranty service and, (b.) make future revisions to this product and Limited Warranty without prior notice or obligation to upgrade your product.**

What is Not Covered:

Your Res-Q Limited Warranty does not cover products or parts Res-Q determines to have been damaged by or subjected to: **(a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.**

Remedy Limited to Repair/Replacement:

The exclusive remedy provided hereunder shall, upon Res-Q inspection and at our option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration should first contact Res-Q to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither Res-Q nor any independent Res-Q distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©Res-Q, 2022. All Rights Reserved.
A4 Version 7/26/2022

Instructions Part #12999.3278

