


# TACTIK®

## Adventure Mirrors

### for Jeep® Vehicles 1976-Current

Installation and Instruction Manual

#13111.9401 (Round Head) and #13111.9400 (Square Head)

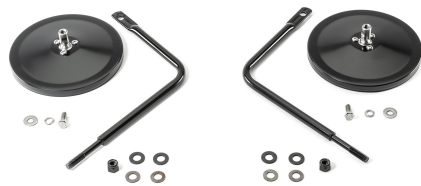

### **⚠ WARNING ⚠**

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

### **⚠ CAUTION ⚠**

RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. DO NOT USE IF DAMAGED.

#### **REQUIRED TOOLS:**

**SAFETY GLASSES**  
**14MM WRENCH**  
**12MM WRENCH**  
**11MM WRENCH**

#### **KIT CONTENTS LIST:**

**MIRROR HEADS & HARDWARE (2 EACH)**  
**MIRROR ARMS (2 EACH)**  
**NYLOC NUTS (2)**  
**NYLON WASHERS (4)**  
**STEEL WASHERS (4)**

# TACTIK®

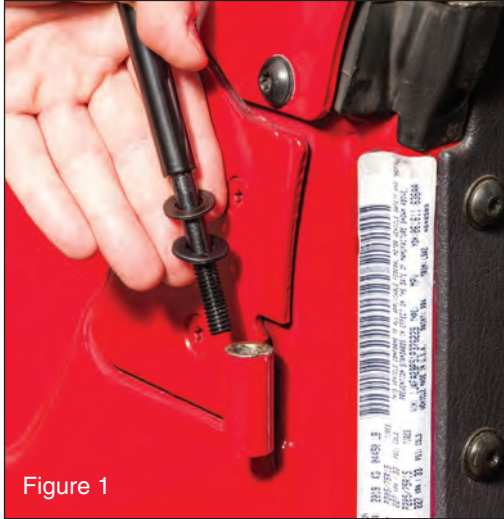


Figure 1



Figure 2

**Step One: Remove Doors**

*Put on safety glasses. Start by removing your Jeep doors and locating the upper door hinge on the driver's side.*

**Step Two: Install Mirror Arm**

*Install a metal washer and then a nylon washer onto the threaded end of the mirror arm as shown in Figure 1.*





Figure 3

*As shown in Figure 2, install the mirror arm into the door hinge and then from the bottom, install another nylon and steel washer, followed by a nyloc nut. Make sure the nylon washers are sandwiched between the steel washers and in contact with the door hinge so as not to damage the paint on the vehicle.*

*As shown in Figure 3, tighten the Nyloc nut using a 14mm wrench or socket while holding the mirror arm in place. Tighten until the arm is snug in the door hinge but not so tight that it cannot be adjusted.*

**⚠ CAUTION ⚠**

**READ ALL SAFETY MESSAGES AND ALWAYS WEAR SAFETY GLASSES WHEN WORKING WITH TOOLS.**

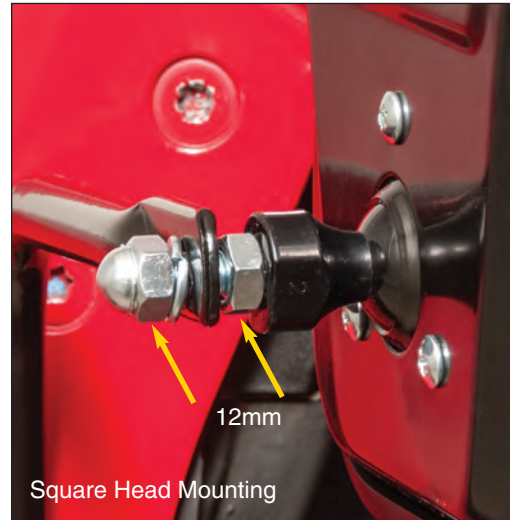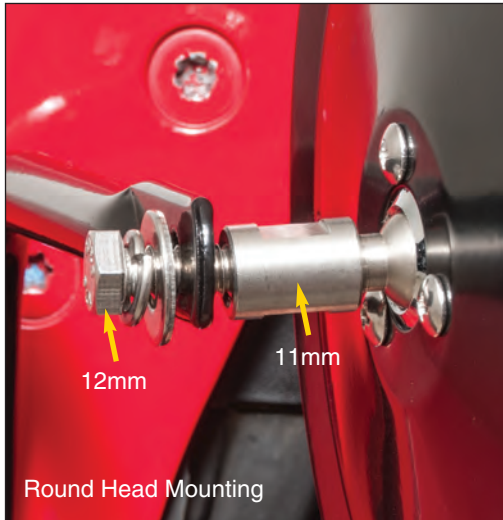

### **Step Three: Install Mirror Head**

*Install the Mirror head depending upon round or square design. Tighten the round mirror head with a 12mm wrench on the bolt head and an 11mm wrench on the mirror barrel. Tighten the square head design with two 12mm wrenches on the jam and acorn nuts.*

*The tension of the mirror head can be adjusted using the 3 phillips head screws on the backside of the mirror. DO NOT OVER TIGHTEN. The mirror should not be so tight that it cannot be adjusted. Adjust mirror then check and snug all fasteners. Repeat steps for the passenger side mirror.*



# TACTIK® Exclusive One Year Limited Warranty

Your TACTIK® branded accessories are covered by the following Limited Warranty provided exclusively by TACTIK® located at 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. TACTIK® neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**.

**What is Covered:** Subject to the terms, exclusions and limitations herein and with respect only to TACTIK® branded accessories first sold in the United States, TACTIK® warrants to the initial retail purchaser only that your TACTIK® accessory shall be free of defects in material and workmanship: **for a period of one (1) year from date of retail purchase.**

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the TACTIK® accessory is installed or other transfer third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 1 year from date of initial retail sale. TACTIK® reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

#### **What is Not Covered:**

Your TACTIK® **Limited Warranty** does not cover products or parts TACTIK® determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

**Remedy Limited to Repair/Replacement: The exclusive remedy provided hereunder shall, upon TACTIK® inspection and at TACTIK's option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty.** Customers requesting warranty consideration should first contact TACTIK® to obtain a RGA number via telephone at 800-603-4064, or initiate customer service by email at: customerservice@tactik4x4.com. All labor, removal, shipping and installation costs are customer's responsibility.

#### **Other Limitations - Exclusion of Damages - Your Rights Under State Law:**

In consideration of the purchase price paid, neither TACTIK® nor any independent TACTIK® distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©TACTIK® 2023 All Rights Reserved. LTR Version

**TACTIK®**