

TACTIK®

Rooftop Cargo Carrier

Instruction Manual: #92020-1000 (10 Cubic Ft)
and 92020-1001 (18 Cubic Ft)



⚠ WARNING ⚠

THIS ROOFTOP CARGO CARRIER IS DESIGNED TO ATTACH/MOUNT TO THE ROOF OF THE VEHICLE. IMPROPER INSTALLATION OR USE OF THIS ROOFTOP CARGO CARRIER MAY RESULT IN SERIOUS INJURY OR DEATH. FOLLOW THESE INSTALLATION INSTRUCTIONS CAREFULLY TO ENSURE PROPER INSTALLATION ON YOUR VEHICLE AND SAFE USE OF YOUR ROOFTOP CARGO CARRIER.

⚠ CAUTION ⚠

THIS ROOFTOP CARGO CARRIER ADDS SIGNIFICANT HEIGHT TO YOUR VEHICLE. BE AWARE OF THAT DIFFERENCE IN HEIGHT AROUND LOW CLEARANCE AREAS SUCH AS LOW TREE BRANCHES, BRIDGES, HOME GARAGES, CAR WASHES AND PARKING GARAGES. REMOVE THE CARGO CARRIER BEFORE ENTERING THOSE AREAS.

TACTIK®

A FEW WORDS ABOUT PRODUCT SAFETY:

Your Tactik Rooftop Cargo Carrier is intended to enhance the utility and enjoyment of your vehicle. Before installation, please review the following safety information and installation recommendations. Throughout these instructions important safety information is generally preceded by one of the three signal words indicating the relative risk of injury, property damage or adverse consequence.

The signal words mean:

! WARNING !

A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN DEATH OR SERIOUS INJURY. YOU CAN BE KILLED OR SERIOUSLY HURT IF YOU DON'T FOLLOW INSTRUCTIONS.

! CAUTION !

A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN A MINOR OR MODERATE INJURY. YOU CAN BE MODERATELY HURT AND ALSO MAY SUFFER PROPERTY DAMAGE IF YOU DON'T FOLLOW INSTRUCTIONS.

NOTICE

CAREFUL ATTENTION IS REQUIRED TO THIS INSTRUCTION OR OPERATION BUT GENERALLY DOES NOT RELATE TO PERSONAL INJURY. DAMAGE TO YOUR ROVE PRODUCT OR OTHER PROPERTY MAY RESULT IF YOU DON'T FOLLOW INSTRUCTIONS.

BEFORE YOU BEGIN USAGE:

Congratulations on your purchase of the Tactik Rooftop Cargo Carrier. Your top-quality Rooftop Cargo Carrier mounts directly to your properly weight-rated roof rack or aftermarket roof bars. When unpacking, check to make sure all parts are included and not damaged due to shipping. If any part is missing or broken, please call Customer Service at 800-745-6037 as soon as possible. Thank you again for your purchase.

! WARNING !

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

! WARNING !

CHECK THAT BALE LATCH IS CLOSED AND SECURED. TEST THAT LID WILL NOT LIFT UP WHEN PULLED. ALL FOUR LOCKS MUST BE ENGAGED (AND KEYS REMOVED) WHENEVER THE VEHICLE IS IN MOTION.

! WARNING !

ENSURE THAT ALL HARDWARE IS PROPERLY ATTACHED, TIGHTENED AND LOCKED PRIOR USAGE. PERIODICALLY INSPECT HARDWARE TO ENSURE THEY ARE FASTENED SECURELY AND PROPERLY TIGHTENED.

! CAUTION !

RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. DO NOT USE IF DAMAGED.

NOTICE

INSTALL "CAUTION" (LOW CLEARANCE) REMINDER STATIC CLING DECAL ON REAR VIEW MIRROR WHEN USING CARGO CARRIER.

THIS ROOFTOP CARGO CARRIER IS MOISTURE RESISTANT, BUT CONTENTS COULD BECOME WET WHEN EXPOSED TO CERTAIN WEATHER ENVIRONMENTS. WE SUGGEST THE USE OF DRY BAGS WHEN NEEDED.


NOTICE

HIGHWAY SPEEDS WITH AN EMPTY CARGO CARRIER IS DISCOURAGED. IF IT IS UNAVOIDABLE, TAKE EXTRA PRECAUTIONS TO MAKE CERTAIN THE CARGO CARRIER IS PROPERLY SECURED AND ATTACHED.

BEFORE YOU USE

KIT CONTENT LIST:

- A. Mounting Bracket (x4)
- B. Knob (x8)
- C. Mounting Back Plate (x4)
- D. "CAUTION" (Low Clearance) Decal (x1)
- E. Keys (x2)

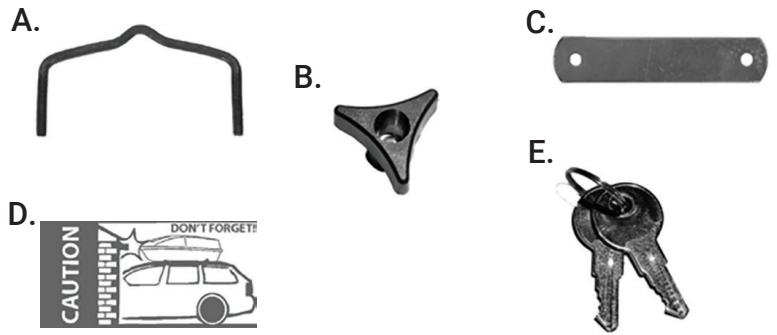

OPTIONAL TOOLS:

- Drill
- 9/32" Drill Bit

INSTRUCTIONS

FIG 1



Put on safety glasses. Place the base on a flat surface. Before placing the top on, make sure all four locks are in the unlocked position. This is with the keyhole in a vertical position and the latch in a straight down position. Place and align the top shell on the base. The top will overlap the base and slide over the lip of the base. The latch of the lock should also be through the corresponding slots in the base. (Fig 1)


FIG 2





FIG 3



On top shell make sure all four cams are in the unlocked position and in slots. Note that the latch should go completely through the slot in the ledge in the base. (Fig 2) The key can be inserted to turn and lock the cam in this position. (Fig 3) At this point, lock one side of the cargo carrier so that the locks act as a hinge. Determine this by deciding which side you prefer to load the cargo carrier and lock the two locks on the opposite side.

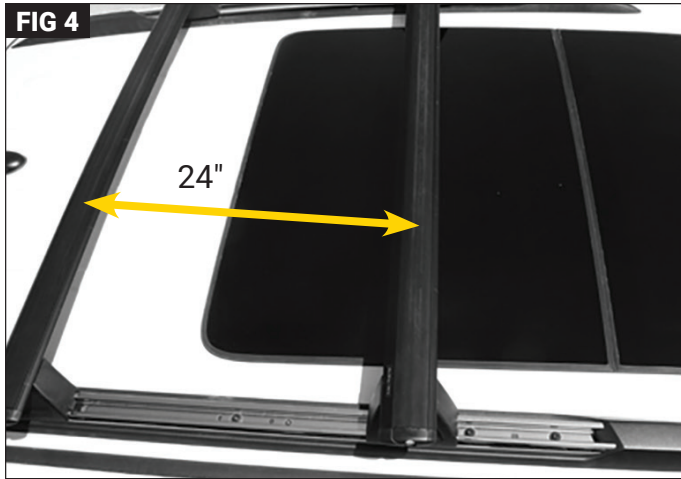

If the cross rails on the vehicle are movable, set them at 24" apart measured from the center of the rail. (Fig 4) The lower, more streamlined section of the cargo carrier is the front and should be pointed in the same direction as the front of the vehicle. (Fig 5)

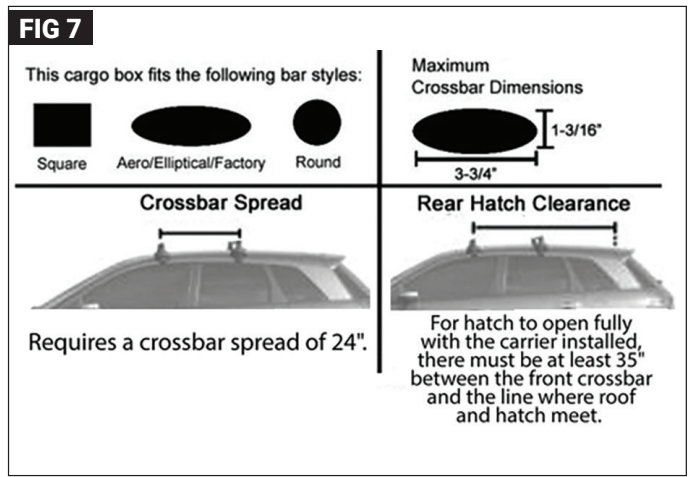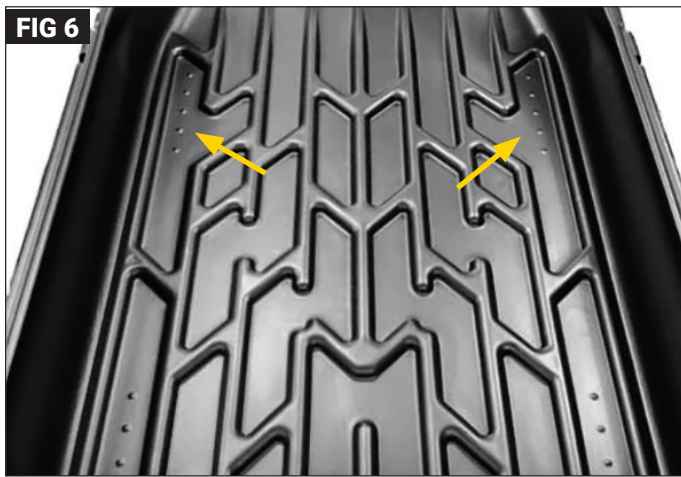


The cross rails on some vehicles are not adjustable and may require additional holes drilled into the bottom of the cargo carrier to match the fixed position width. If holes need to be drilled, attach the base of the cargo carrier to the rear cross rails first, using the predrilled holes and instructions in the following sections. There are drill marks set at 2" apart. Measure and mark using the mounting back plate as a template for the hole positions. (Fig 6) Remove the base from the roof to drill the holes. Use a 9/32" drill bit.

Note: This cargo carrier will fit multiple crossbar styles. Be aware of mounting location as it relates to rear hatch opening for some vehicles. (Fig 7)


FIG 8**FIG 9**

Before mounting cargo carrier onto the roof rack of the vehicle, we will attach the internal uprights to the top of the carrier. While holding the lid open, locate the closest upright on either the forward or rear internal surface. (Fig 8) Raise the upright on front and rear ends and place the ball stud into the larger hole and slide into the locked position. On the 10 CU.FT model, there will only be one ball stud. Be sure to use the closest upright for the 18 CU.FT model (Fig 9).

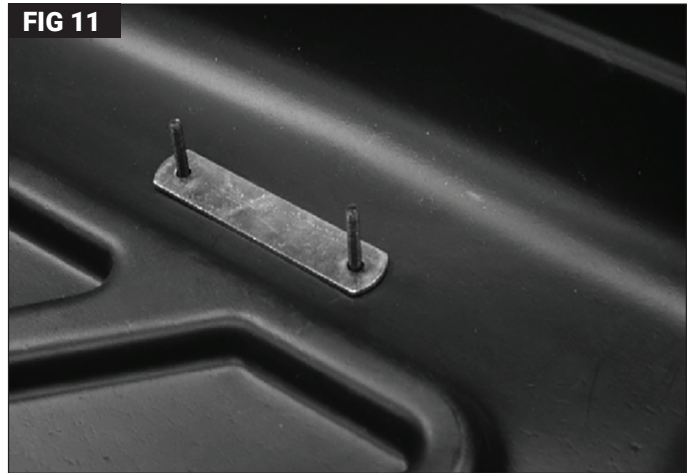FIG 10**FIG 11**


Carefully, lift cargo carrier onto the roof rack trying to center it on the vehicle. From the bottom, slide the mounting bracket around the rail and through both pre-drilled holes. (Fig 10) Slide the mounting plate over the threaded posts inside the cargo carrier. (Fig 11)

FIG 12

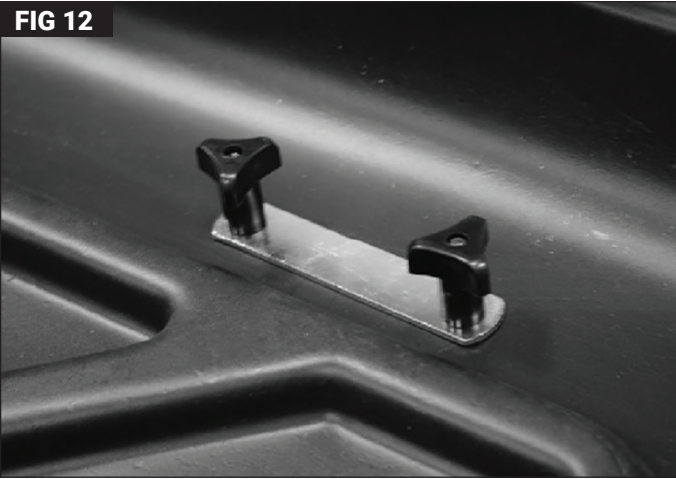

Thread knobs onto the threaded posts from the previous step. (Fig 12) Do not fully tighten at this point. Repeat the mounting bracket, mounting plate and knobs steps until all four brackets, four mounting plates and eight knobs are loosely in place. Look from the front and rear of the vehicle and center the cargo carrier as needed. Tighten all eight knobs evenly and securely.

FIG 13

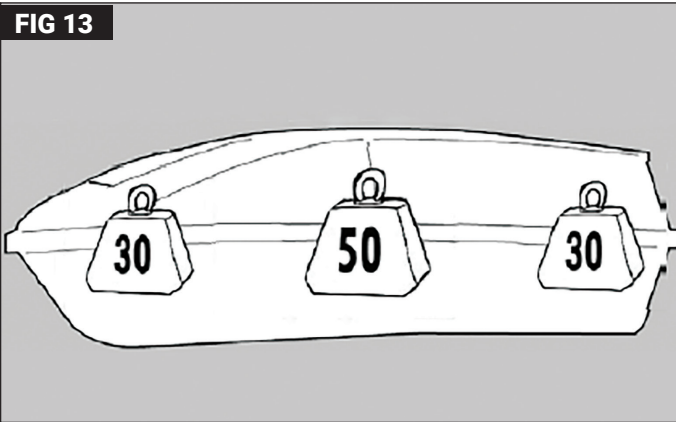

Load the cargo carrier with gear. Proportionately distribute the weight and do not exceed the maximum allowed weight of either the cargo carrier or cross rails. (Fig 13)

Close top lid by releasing the uprights and place the cam locks into the slots. Lock and remove the key.

⚠ WARNING ⚠

CONSULT YOUR AUTOMOBILE OWNER'S MANUAL FOR RECOMMENDED ROOF RACK LOAD CAPACITY. THE CARGO CARRIER SHOULD NOT EXCEED A MAXIMUM WEIGHT OF 110 LBS. OF EVENLY DISTRIBUTED CARGO TO BE TRANSPORTED IN THE CARGO CARRIER.

FIG 14




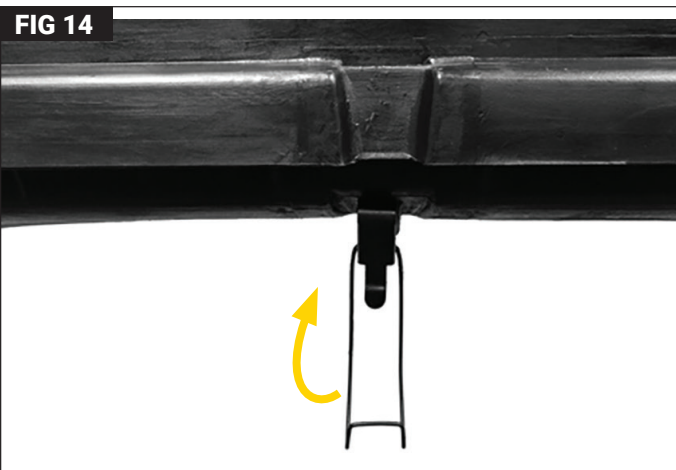


FIG 15

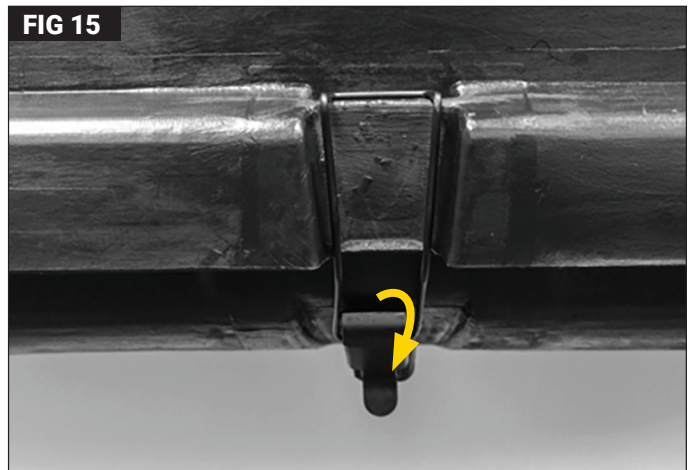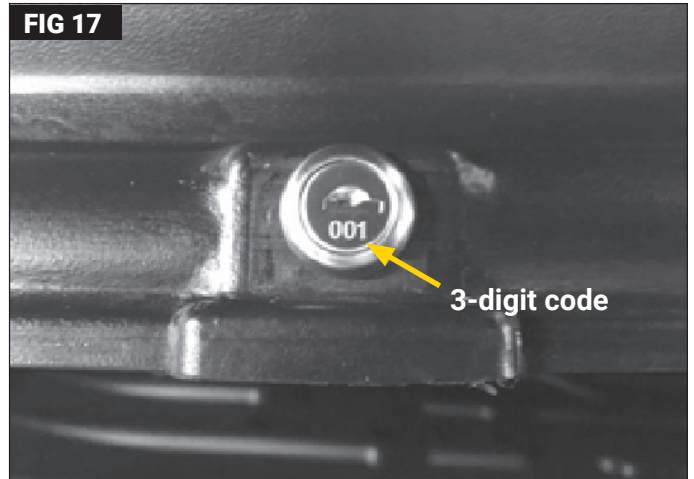

Place the bale latch on the front of the carrier onto the top ledge of the lid (Fig 14) and lower the lever to the closed and locked position. (Fig 15) This will keep the front leading edge of the cargo carrier from rising from wind and elements.

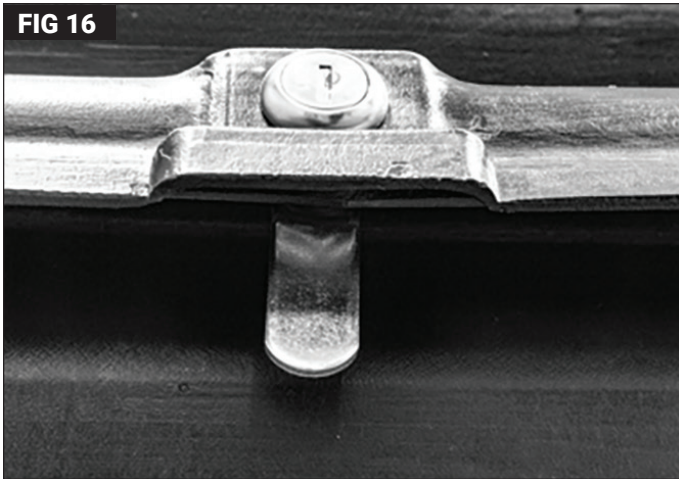

Unlocked. (Fig 16) Locked. (Fig 17) Make sure to lock all locks and secure the bale latch prior to driving vehicle. Note the number on the face of the lock and the key should be the same.

REPLACEMENT PARTS

Keys (x2) #92020.900X

Please specify the 3-digit lock and key code when ordering.

Lock with 2 Keys #92020.910X

Please specify the 3-digit lock and key code when ordering.

Replacement Mounting Hardware Pack #92020.9201

Includes Mounting Brackets (x4), Knobs (x8), Mounting Back Plates (x4), CAUTION Low Clearance Decal (x1)

Replacement Bale Latch with Rivets #92020.9202

TACTIK® Exclusive Three Year Limited Warranty

Your TACTIK® branded accessories are covered by the following Limited Warranty provided exclusively by TACTIK® located at 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. TACTIK® neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**.

What is Covered: Subject to the terms, exclusions and limitations herein and with respect only to TACTIK® branded accessories first sold in the United States, TACTIK® warrants to the initial retail purchaser only that your TACTIK® accessory shall be free of defects in material and workmanship: **for a period of three (3) year from date of retail purchase.**

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the TACTIK® accessory is installed or other transfer third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 3 years from date of initial retail sale. TACTIK® reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

What is Not Covered:

Your TACTIK® **Limited Warranty** does not cover products or parts TACTIK® determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

Remedy Limited to Repair/Replacement: The exclusive remedy provided hereunder shall, upon TACTIK® inspection and at TACTIK's option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration should first contact TACTIK® to obtain a RGA number via telephone at 800-603-4064, or initiate customer service by email at: customerservice@tactik4x4.com. All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither TACTIK® nor any independent TACTIK® distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©Tactik, 2022. All Rights Reserved. A4 Version 2/15/22

Instructions Part #12999.3239