


# 2-Door Magnetic Body Panels // Care & Installation Instructions

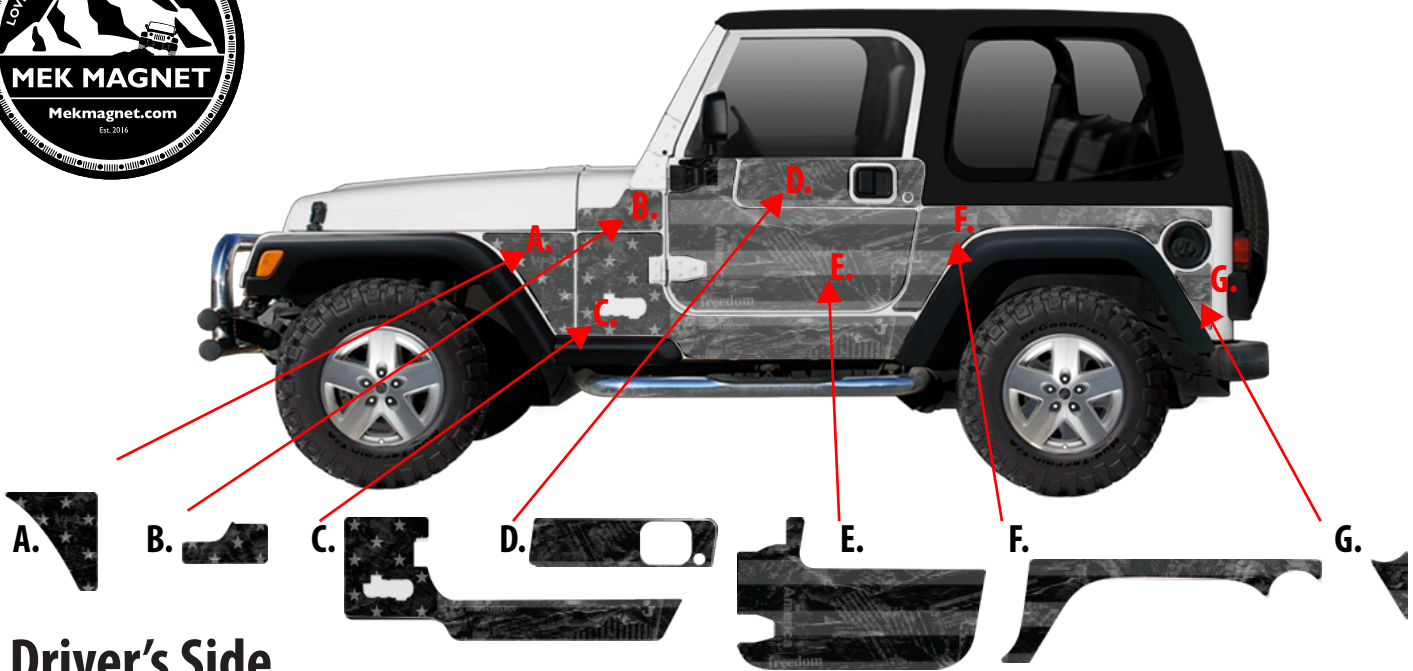

## Driver's Side

(same application on Passenger Side)

### Care & Maintenance:

1. Remove Jeep Armor magnetic panels daily and after each use, especially after harsh weather or temperature exposure.
2. Clean with a gentle soap and water, do not use harsh detergents or rough surface scrubbers.
3. Allow both sides of the Jeep Armor magnetic panel to air dry before reapplying to a clean and dry Jeep exterior.
4. When not using, store in a clean, dry place avoiding exposure to extreme temperatures.
5. Do not store in direct sunlight as damage or fading could result.
6. Store Jeep Armor magnetic panels on a flat and level surface with insulation such as foam sheets between each sheet.

### Installation Instruction:

1. Ensure all packing material and any loose magnet shavings are removed before Jeep Armor magnetic panel installation.
2. Ensure the application and magnetic surface is clean and dry before reapplication.
3. Temperatures outside of the specified range of -40 to 170 deg F could affect the magnetic panel's strength. Installation in temperatures outside of this range is not recommended.
4. If any Jeep Armor magnetic panel is shifted, misaligned or moved during use or installation remove the entire panel and reposition to prevent scratching your Jeep's surface.

***Please note, Jeep limited edition models may have badges in different locations, the Trail Rated badge must be repositioned to fit the designed magnet panel cutout, any additional badges must be removed, repositioned or the Jeep Armor panel modified to fit around them ensuring a flush panel fit to the Jeep body without any lifted sections.***

Love your Jeep? Stop by our website to post a review and pics of your ride! [www.mekmagnet.com](http://www.mekmagnet.com)