

! WARNING !

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

! CAUTION !

RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. DO NOT USE IF DAMAGED.

! CAUTION !

IF EQUIPPED WITH LIGHTING, WHEN ROUTING ELECTRICAL WIRES, ALWAYS AVOID PINCHING WIRES. ALWAYS AVOID HOT OR MOVING COMPONENTS. ALWAYS SECURE WIRES WITH WIRE TIES.

! CAUTION !

WHEN ROUTING WIRES, TAKE CARE TO AVOID CONTACT WITH SHARP METAL EDGES THAT COULD DAMAGE WIRING.

! CAUTION !

MAKE SURE THE IGNITION AND ACCESSORY POWER ARE COMPLETELY SHUT OFF TO AVOID ELECTRICAL ISSUES DURING INSTALLATION.



PARTS LIST

Fender Flare RH - QTY 1
Fender Flare LH - QTY 1
T- Connectors - QTY 8
Fender Flare Clips - QTY 16
Fender Flare Bracket RH - QTY 1
Fender Flare Bracket LH - QTY 1

REQUIRED TOOLS

Safety Glasses
Ratchet
Socket Extension
10mm Socket

FENDER FLARE PREPARATION

FIG 1



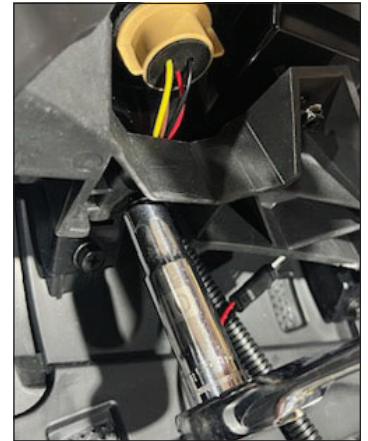


FIG 2

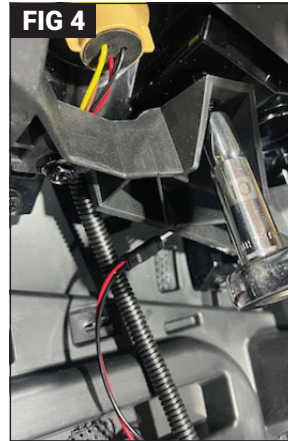




Put on safety glasses. Prepare each fender flare by attaching 8 plastic clips per side (FIG 1 & 2).

STEP 1 - BRACKET INSTALLATION

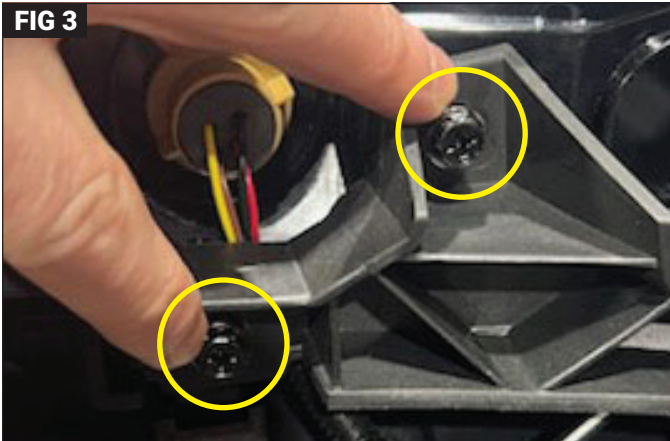

Locate the two 10mm screws securing the factory fender flare bracket above the side marker bulb (FIG 3). Use a 10mm socket to remove the two 10mm screws (FIG 4). Repeat this step for each fender flare.

STEP 2

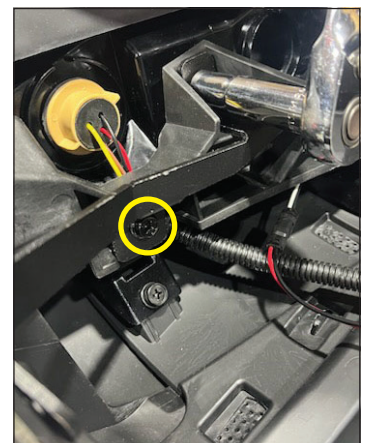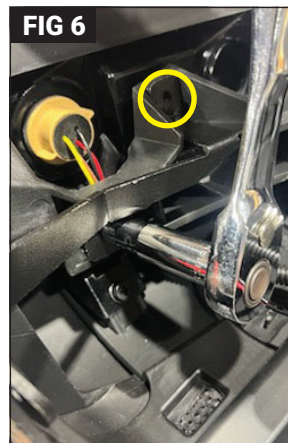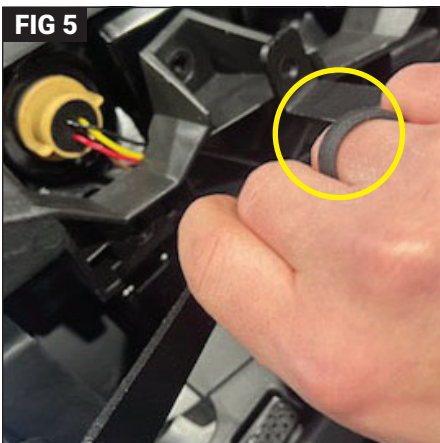

Place the supplied fender bracket onto the fender flare, ensuring it sits directly over the factory bracket (FIG 5). Using a 10mm socket, tighten the two factory 10mm screws through the supplied bracket (FIG 6). Repeat this step for each fender flare.

STEP 3



Locate the side marker bulb and connector on your factory fender flare. We began with the drivers side, but you can start on either side (FIG 7). Carefully unplug the side marker connection (FIG 8).

STEP 4

FIG 9

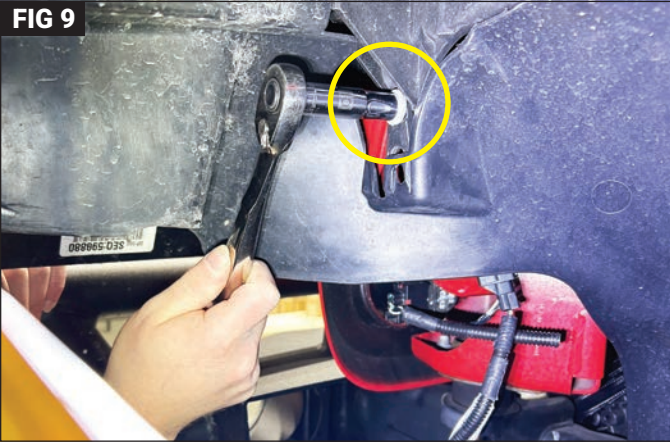


FIG 10



Begin at the front and underneath the factory fender flare. Using a 10mm socket, remove the five 10mm factory bolts that hold it in place (FIG 9 & 10). Retain all factory bolts for later use.

STEP 5

FIG 11



FIG 12



Continue by removing the remaining bolts located underneath the factory fender flare using a 10mm socket (Fig 11 & 12).

STEP 6

FIG 13



Using a 10mm socket, remove the bolt that connects the factory fender flare to the vehicle frame (FIG 13).

STEP 7

FIG 14


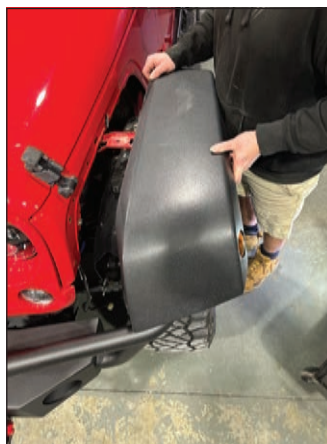


FIG 15

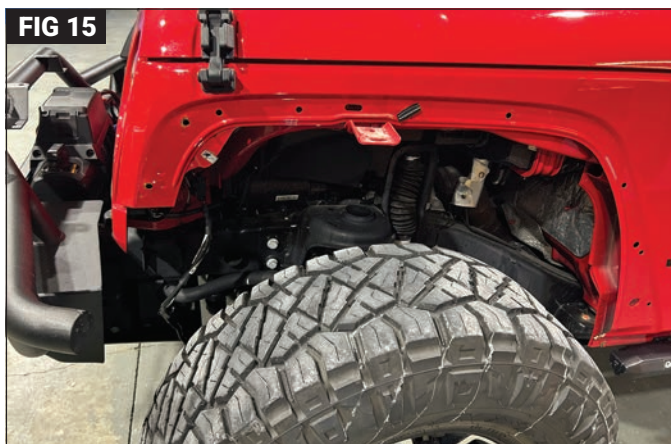


After removing the factory fender flare, locate the factory wiring harness that connects the turn signal and side marker lights (FIG 15). **Note: The factory fender flare liners will not be used on the new fender flares.**

STEP 8 - SIDE MARKER WIRING

FIG 16



FIG 17

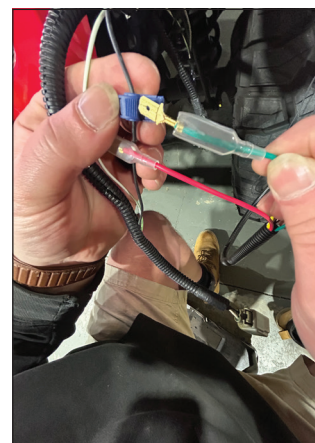

Identify the black, green, red, yellow, and white wires coming from the new fender flare. **Note: Do not connect the white wire from the fender flare to the factory OEM wiring.** Install two T-connectors—one on the black wire and one on the white/green wire—used for the side marker lights. (FIG 16). From the fender flare wiring, connect the red wire to the white/green wire connector and the green wire to the black wire connector to power the side marker lights (FIG 17).

STEP 9 - TURN SIGNAL WIRING

FIG 18



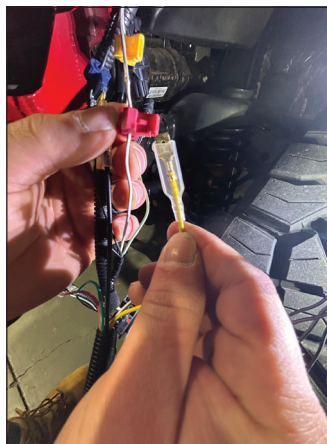


FIG 19

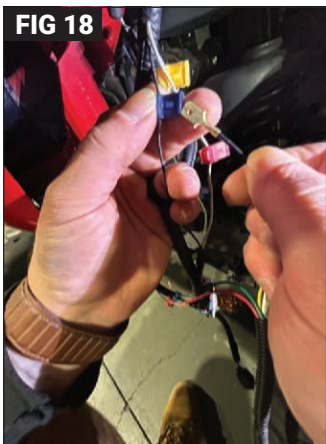


Install two T-connectors on the factory wiring harness—one on the black wire and one on the white/gray wire. Connect the black wire from the fender flare harness to the black wire on the factory harness. Then, connect the yellow wire from the fender flare harness to the white/gray wire on the factory harness (Drivers side) (FIG 18). Reinstall the factory turn signal bulb into its original position (FIG 19). **Note: For the passenger side turn signal wiring, connect black to black and yellow to white/pink.**

STEP 10

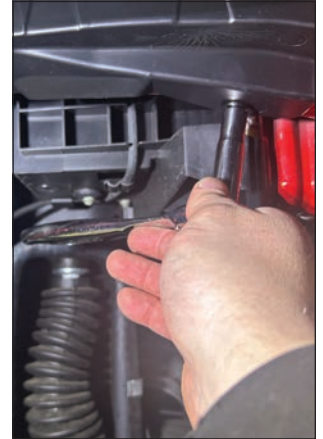

Reinstall the side marker connector. Neatly wrap the bundled wires with electrical tape to secure them. Secure the two resistors safely to the side. **We strongly recommend mounting them onto a metal surface of the vehicle to ensure proper heat dissipation** (FIG 20). Secure the fender flare by aligning and snapping the 8 pre-installed clips into the corresponding slots on the vehicle. Using a 10mm socket, reinstall the factory 10mm bolts to secure the fender flare in place (FIG 21).

STEP 11

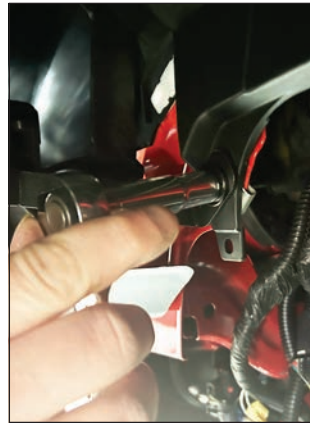

Using a 10mm socket, reinstall the bolts to secure the fender flare (FIG 22 & 23).

STEP 12



After tightening the last 10mm bolt on the new fender flare, follow the same steps to install the remaining fender flare (FIG 24). Installation is now complete.

TACTIK® Exclusive One Year Limited Warranty

Your TACTIK® branded accessories are covered by the following Limited Warranty provided exclusively by TACTIK® located at 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. TACTIK® neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or **Limited Warranty**.

What is Covered: Subject to the terms, exclusions and limitations herein and with respect only to TACTIK® branded accessories first sold in the United States, TACTIK® warrants to the initial retail purchaser only that your TACTIK® accessory shall be free of defects in material and workmanship: **for a period of one (1) year from date of retail purchase.**

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the TACTIK® accessory is installed or other transfer third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 1 year from date of initial retail sale. TACTIK® reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this **Limited Warranty** as a condition of warranty service and, (b.) make future revisions to this product and **Limited Warranty** without prior notice or obligation to upgrade your product.

What is Not Covered:

Your TACTIK® **Limited Warranty** does not cover products or parts TACTIK® determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

Remedy Limited to Repair/Replacement: The exclusive remedy provided hereunder shall, upon TACTIK® inspection and at TACTIK's option, be either repair or replacement of product or parts (new or refurbished) covered under this **Limited**

Warranty. Customers requesting warranty consideration should first contact TACTIK® to obtain a RGA number via telephone at 800-603-4064, or initiate customer service by email at: customerservice@tactik4x4.com. All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither TACTIK® nor any independent TACTIK® distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

©TACTIK® 2025 All Rights Reserved. A4 Version

Instructions Part #12999.5177

TACTIK®