

**TRU-FIT™**

# Faux Leather Seat Covers

Installation Manual: for Wrangler JK 4DR #14169-5XXX



## PARTS & REQUIRED TOOLS

### PARTS LIST:

Front Seat Cover Set  
Rear Seat Cover Set

### REQUIRED TOOLS:

No Tools Required.

**CAUTION**

READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS BEFORE ATTEMPTING TO INSTALL THIS PRODUCT. ALWAYS WEAR SAFETY GLASSES DURING INSTALL.

**WARNING**

FRONT SEAT COVERS ARE DESIGNED SPECIFICALLY FOR THE PASSENGER OR DRIVER SIDES OF THE VEHICLE AND ARE NOT INTERCHANGEABLE.

**TRU-FIT™**

## A FEW WORDS ABOUT PRODUCT SAFETY:

Your Tru-Fit Jeep protection product is intended to enhance the utility and enjoyment of your off road capable vehicle. Follow safety information and installation recommendations. Throughout these instructions is important safety information that is generally preceded by one of three signal words indicating the relative risk of injury, property damage or adverse consequence.

The signal words mean:

### ⚠️ **WARNING** ⚠️

A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN DEATH OR SERIOUS INJURY. YOU CAN BE KILLED OR SERIOUSLY HURT IF YOU DON'T FOLLOW INSTRUCTIONS.

### ⚠️ **CAUTION** ⚠️

A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN MINOR OR MODERATE INJURY. YOU CAN BE MODERATELY HURT AND ALSO MAY SUFFER PROPERTY DAMAGE IF YOU DON'T FOLLOW INSTRUCTIONS.

### **NOTICE**

CAREFUL ATTENTION IS REQUIRED TO THIS INSTRUCTION OR OPERATION BUT DOES GENERALLY NOT RELATE TO PERSONAL INJURY. DAMAGE TO YOUR TRU-FIT PRODUCT OR OTHER PROPERTY MAY RESULT IF YOU DON'T FOLLOW INSTRUCTIONS.

## BEFORE YOU BEGIN INSTALLATION:

Congratulations on your purchase of Tru-Fit **product** for your Jeep® Wrangler. This custom **product** has been designed for protection, long life, and great looks. When unpacking, check to make sure all parts are included and not damaged due to shipping. If any part is missing or broken, please call Customer Service at 800-745-6037 as soon as possible. Thank you again for your purchase and let's start the installation process.

### ⚠️ **WARNING** ⚠️

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE:  
READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

### ⚠️ **WARNING** ⚠️

FRONT SEAT COVERS ARE DESIGNED SPECIFICALLY FOR THE PASSENGER OR DRIVER SIDES OF THE VEHICLE AND ARE NOT INTERCHANGEABLE.

### ⚠️ **WARNING** ⚠️

IF YOUR VEHICLE IS EQUIPPED WITH SIDE IMPACT AIRBAGS, MAKE SURE THAT YOU POSITION THE AIRBAG FLAPS OVER THE AIRBAGS ON THE OUTSIDE OF THE SEAT FACING THE DOORS. FAILURE TO DO SO COULD LESSEN THE EFFECTIVENESS OF THE AIRBAGS.

### ⚠️ **CAUTION** ⚠️


DO NOT ATTACH STRAPS OR HOOKS TO ANY PART OF THE SEAT THAT MIGHT IMPEDE PROPER OPERATION OF THE SEAT.

### ⚠️ **CAUTION** ⚠️

READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS BEFORE ATTEMPTING TO INSTALL THIS PRODUCT. ALWAYS WEAR SAFETY GLASSES DURING INSTALL.

## SEAT COVER INSTALLATION - FRONT SEATS

Prepare your seat covers for installation. Make sure to unbuckle all straps and unzip all zippers on your seat covers prior to installation. Remove front headrests by depressing the release tabs at the base of the headrest posts and lift up on headrest. Front seat covers are designed specifically for the passenger and drivers side of the vehicle and are not interchangeable. The Tru-Fit sew bar tags on front seats always face to the center of the vehicle (Fig 1).

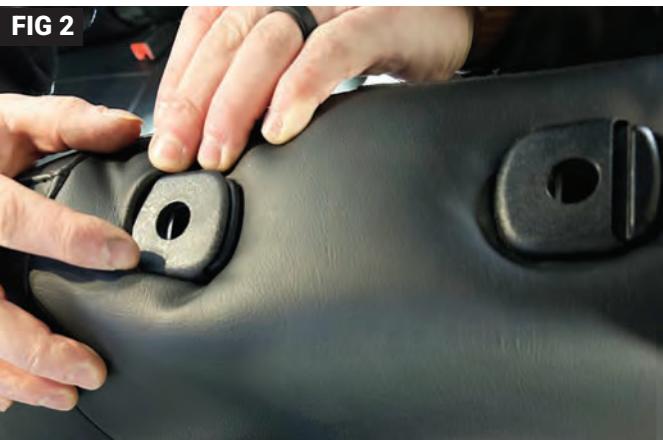


Start by slipping the seat cover over the back of your vehicle's seat and pulling it down all the way over seatback. Ensure that the holes for the headrest in the covers line up with the grommets in the seat. Install the headrest covers and reinstall the headrests (Fig 2). Next, tuck the connecting flaps of the seat cover between the seat base and seat back. Folding the seat forward may make this process easier (Fig 3). Fit the seat base cover snug around the bottom seat base. Install the cover over the seat base and pass the connecting velcro straps between the seat back. Make sure the straps are tucked all the way through the crevice between the seat back and base. Underneath the seat, connect and tighten the three velcro straps from the back of the seat base cover (Fig 4). Pull and secure the three velcro strips under the seats to the back of the seats. Finish installation by adjusting the seat covers around and behind all seat levers, adjusters, covers, and trim



Pull and secure the three velcro strips (Fig 3) under the seats to the back of the seats. Finish installation by adjusting the seat covers around and behind all seat levers, adjusters, covers, and trim.

## SEAT COVER INSTALLATION - REAR SEATS

**FIG 1**

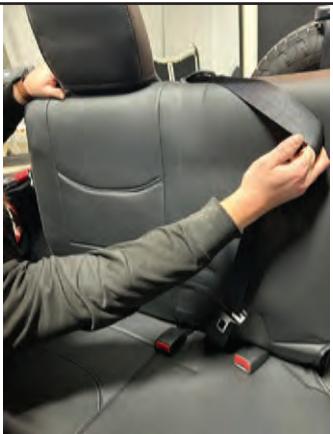

**FIG 2**



Rear seats are equipped with a 60/40 bench split. The 60 split is the passenger side and the 40 split is the drivers side. Start on the passenger side. Slide the fully opened seat cover over the seat while extending the seat belt (Fig 1). Place the cover over the back of the seat. Tuck the connecting flaps of the seat cover between the seat base and seat back. Fold the seat forward. Zipper the seat cover up. Attach the connecting flap on the seat cover (Fig 2). Slide the smaller of the two rear seat back covers (40 portion) over the seat back. Velcro around headrest post. Tuck the connecting flaps of the seat cover between the seat base and the seat back. Finally install the rear seat base covers by placing them over the seat bases. Connect the velcro strip under the seat base and snug for a tight fit.

**FIG 3**



**FIG 4**



Finish installation by adjusting the seat covers around and behind all seat levers, adjusters, covers, and trim. Seat covers can be carefully tucked under and around the headrest grommets. This will provide a more finished look and retain access to headrest release tabs (Fig 3). Finally, install headrest covers and reinstall headrests (Fig 4).

**CAUTION**

BEFORE DRIVING, TEST THE OPERATION OF THE SEATS. IF THE SEAT OPERATION IS IMPAIRED BY THE COVER, MAKE ADJUSTMENTS TO THE INSTALLATION OF THE SEAT COVER, AND TEST THE OPERATION OF THE SEAT AGAIN. DO NOT DRIVE THE VEHICLE UNLESS THE SEATS OPERATE PROPERLY.

**NOTICE**

USE THE STRAPS FOR FINAL ADJUSTMENT ONLY. DO NOT PULL TOO HARD OR OVER-TIGHTEN THE STRAPS. THIS COULD CAUSE DAMAGE TO THE SEAT COVERS.

**Care of your product:**

Periodic adjustments to the seat covers may be necessary as the cover breaks in and conforms to your vehicle's seat. Seat covers can be spot cleaned with mild soap and water and a soft bristle brush. Do not machine wash. Sunlight will naturally fade leather over time. Seat covers are warranted against defects in workmanship and materials, but not for fading due to normal UV exposure.

# Tru-Fit Exclusive Three Year Limited Warranty

Your Tru-Fit branded accessories are covered by the following Limited Warranty provided exclusively by Tru-Fit, 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. Tru-Fit neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or Limited Warranty. This Limited Warranty does not apply and is not cumulative to any accessory or part distributed by Tru-Fit for which the Manufacturer provides a separate written warranty.

## What is Covered:

Subject to the terms, exclusions and limitations herein and with respect only to Tru-Fit branded accessories first sold in the United States, Tru-Fit warrants to the initial retail purchaser only that your Tru-Fit accessory shall be free of defects in material and workmanship: for a period of three (3) years from date of retail purchase.

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the Tru-Fit accessory is installed or other transfer to third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to three (3) years from date of initial retail sale. Tru-Fit reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this Limited Warranty as a condition of warranty service and, (b.) make future revisions to this product and Limited Warranty without prior notice or obligation to upgrade your product.

## What is Not Covered:

Your Tru-Fit Limited Warranty does not cover products or parts Tru-Fit determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

## Remedy Limited to Repair/Replacement:

The exclusive remedy provided hereunder shall, upon Tru-Fit inspection and at our option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration should first contact Tru-Fit to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

## Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither Tru-Fit nor any independent Tru-Fit distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

Tru-Fit 2025. All Rights Reserved.  
A4 Version 2/2/25

Instructions Part #12999.5150

**TRU-FIT**<sup>TM</sup>