

Warranty and Disclaimer

All XKGLOW mounting brackets come with a Limited Lifetime structural warranty to the original purchaser. Within **ONE-YEAR** after the purchase date, the original buyer may return any XKGLOW products that have finish imperfections due to a defect in materials or workmanship. Imperfections from impacts to the piece such as rock chips or abrasions will not be considered defective. Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product, or an act of omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damage that comes from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defects. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you, and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.


- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.

Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 30 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

1. **Remove Factory Hardware:** Remove the 4 bolts shown below on the cowl of the Jeep. These will be replaced with new hardware.

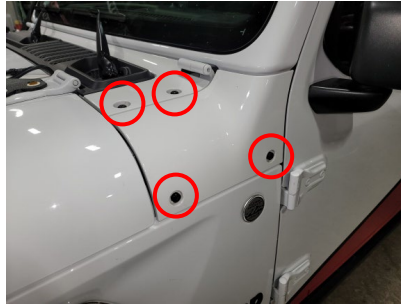

2. **Install Foam to Bracket:** Remove the backing from the protective foam and place it as shown below. This foam will help protect the paint of the Jeep under the brackets.



3. **Install Brackets:** With the provided hardware, install the brackets on the Jeep. The M6 bolts will go on the top, and the M8 will go on the side (see below). The provided spacers should be installed in between the bracket and Jeep, then the bolts will go through them.



4. **Mount 50” Light Bar Spacer (if applicable):** Install the spacers to the A-pillar brackets using the provided hardware. These allow for perfect fitment for 50” light bars.



5. **Install Light Bar:** Use the bolts provided with the light bar to mount it to the Jeep. Be sure to check the clearance of windshield wipers to the light bar before finishing the installation. Use the slotted adjustments in the a-pillar brackets to try different light bar positions to best suit for visibility and wind noise.