



Mounting Instructions

- 1. Connect Harness to Controller:** Plug the 4-pin harness and whips to the controller. If you want the brake & turn signal features, connect the YELLOW wire to the BLUE wire, and the BLACK wire to the WHITE wire. Then, you must run a wire from the RED sensor wire of the controller and tap it into a brake light wire of the vehicle. This will allow the turn signal and brake functions to work properly. Check the XKmax app instructions to learn more about configuring sensor wires.

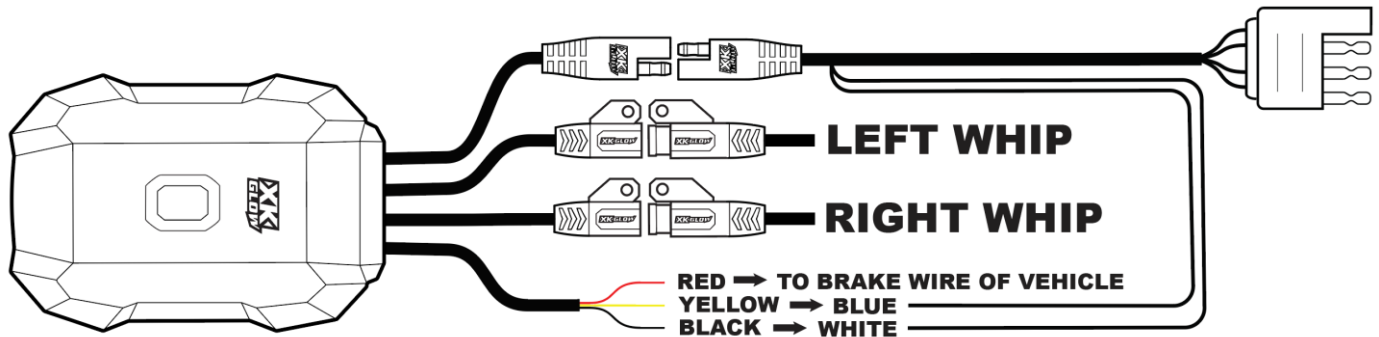

- 2. Install Controller and Whips to Hitch Step:** Use the provided 3m tape to install the controller to the bottom of the whip step. See photo for the recommended installation location. Then install the whips to the holes shown below. Use provided lock washer and nut to tighten the base down to the hitch step.

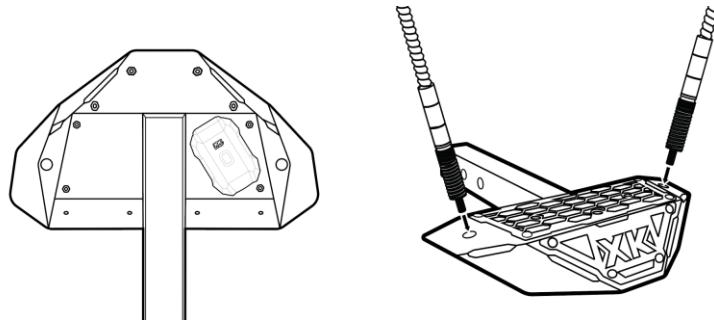

- 3. Install Hitch to Receiver:** Connect all wiring and run wires into the tube of the hitch step. Insert the hitch step into the hitch receiver of the vehicle with the supplied locking hitch pin. Then connect the 4-pin connector. Test the lights and both turn signals to ensure they are connected properly. *If the turn signals are opposite of the vehicles, swap the whip connections going to the controller.

