




BLACK RHINO



BEADLOCK WHEEL DISCLAIMER

INNER TIRE BEAD
SEATS HERE

OUTER TIRE BEAD IS PINCHED IN BETWEEN THE
OUTER LIP OF WHEEL AND BEADLOCK RING
BEADLOCK RING SPACER IS INDICATED
(IF APPLICABLE)

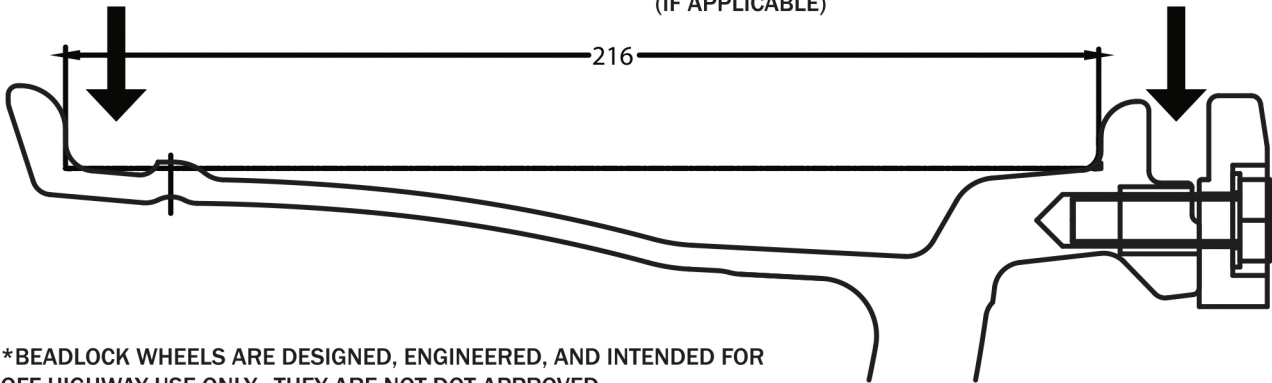

*BEADLOCK WHEELS ARE DESIGNED, ENGINEERED, AND INTENDED FOR OFF-HIGHWAY USE ONLY. THEY ARE NOT DOT APPROVED.

*BEADLOCK WHEELS ARE NOT SUBJECT TO ANY STRUCTURAL OR COSMETIC WARRANTY BECAUSE OF THE CONDITIONS THESE WHEELS ARE INTENDED TO BE USED FOR

*PROFESSIONAL TIRE/WHEEL INSTALLERS MUST BE REQUIRED FOR THE MOUNTING PROCESS.

***BLACK RHINO IS NOT RESPONSIBLE FOR DAMAGE CAUSED BY IMPROPER ASSEMBLY

- USE ONLY BLACK RHINO APPROVED HARDWARE KITS (GRADE 8 BOLTS & WASHERS) FOR THE ATTACHMENT OF THE BEADLOCK RING TO THE WHEEL.
- NO EXCESS RUBBER PROTRUSIONS (MOLD FLASH) ON THE BEAD AREA OF THE TIRE SHOULD BE PRESENT.
- TIRE BEAD MUST SEAT EVENLY TO THE OUTSIDE FLANGE OF THE WHEEL.
- LARGER TIRES MAY REQUIRE A BEADLOCK SPACER. PLEASE CALL TO CONFIRM COMPATIBILITY PRIOR TO ASSEMBLY

GRADE 8 HARDWARE FINAL TORQUE SPECS 22LBS (10KG) W/Anti-Seize 15.5LBS (7KG)

A STAR PATTERN MUST BE USED WHEN ATTACHING AND TIGHTENING BOLTS .

- Start bolts by hand, at least two full turns.
- Using a calibrated torque wrench, tighten each bolt to half the required torque specification
- Using a calibrated torque wrench, tighten each bolt to the required torque specifications of 22LBS or 15.5LBS with Anti-Seize.

TECHNICAL QUESTIONS? PLEASE CALL:

800.578.4879

WWW.BLACKRHINOWHEELS.COM

PSZLOCK01